
NXT UMOUNT™ INSTALLATION MANUAL

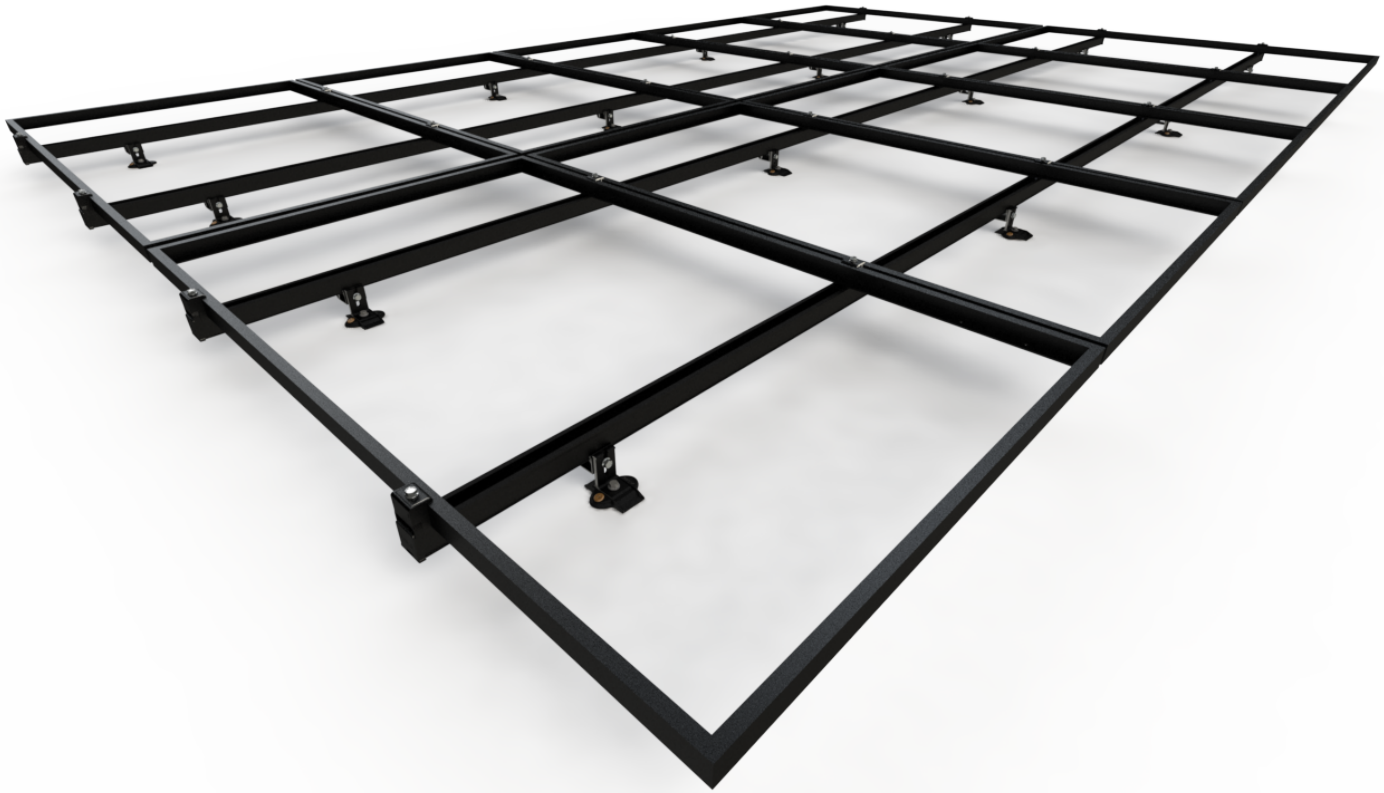

UNIRAC Code-Compliant Installation Manual

© 2023 by Unirac, Inc. All rights reserved.


UNIRAC values your input regarding the accuracy and user experience of this document. Please write to publications@unirac.com.

PUB2026OCT13


NXT UMOUNT™ INSTALLATION MANUAL

TABLE OF CONTENTS

NXT SYSTEM COMPONENTS. 1-7
SYSTEM LAYOUT. 8
THERMAL BREAK 9
STRONGHOLD ATTACHMENT WITH BUTYL 10-17
ROOF PREP FOR LAG BOLT INSTALLATION 18
STRONGHOLD ATTACHMENT INSTALLATION 19
FLASHKIT PRO INSTALLATION. 20
ATTACHMENT ORIENTATIONS 21-22
RAIL INSTALLATION. 23
STRUCTURAL SPLICE INSTALLATION 24-26
MLPE MOUNTING. 27
WIRE MANAGEMENT 28
COMBO CLAMP INSTALLATION 29
US DOMESTIC COMBO CLAMP INSTALLATION 30-31
HIDDEN END CLAMP INSTALLATION 32
FINISHING TOUCHES 33
S-5! COMPONENTS INSTALLATION. 34-46
SYSTEM GROUNDING 47
BONDING CONNECTIONS & GROUNDING PATHS. 48-52
CODE COMPLIANCE NOTES 53
COMPATIBLE MODULES 56-62

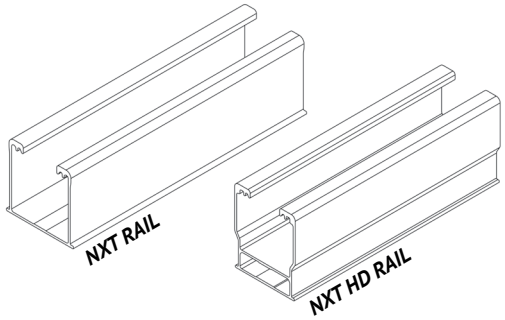


RAIL: Supports PV modules with built-in wire management. Aluminum extrusion, available in mill, or dark anodized.

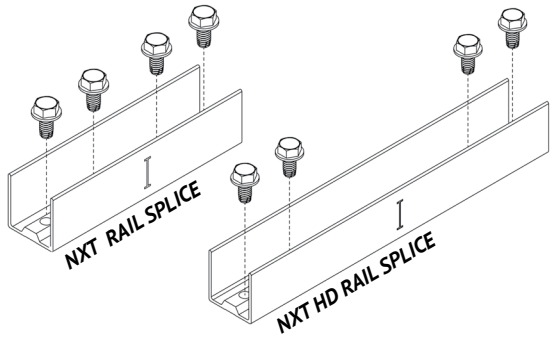

RAIL SPLICE: Internal Structural Splice joins, aligns, and electrically bonds rail sections into single length of rail. It is 6 inches long aluminum splice, pre-assembled with stainless-steel hardware.

Rated for Single Use Only




STRONGHOLD BUTYL ATTACHMENT KIT: Use to secure rails through roofing material to building structure. Kit includes the following:


- (1) Stronghold Rail Clamp For Butyl Attachment
- (1) Stronghold Attachment With Butyl Base
- (2) 3" Screw, HWH, SS, #14-14, TYPE AB, W/#14 EPDM washer

NOTE:

- **Extra butyl pad available as separate SKU**
- **Additional deck screws are available as separate SKU**

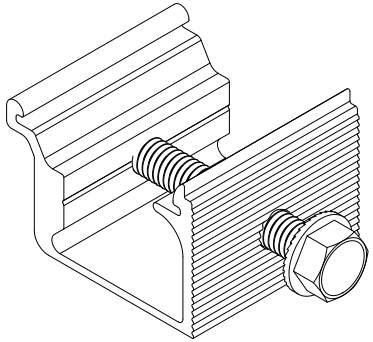


STRONGHOLD RAIL CLAMP: Use to secure rails to roof attachment. It is also available without the attachment kit for use with other mounting methods (Solarhooks, tilt legs, etc.)




STRONGHOLD ATTACHMENT KIT: Use to secure rails through roofing material to building structure. Kit includes the following:

- (1) Stronghold Rail Clamp
- (1) Stronghold Attachment Base
- (2) 4" Stainless-Steel Lag Bolt with sealing EPDM washer.
- UNIRAC provided sealant (if applicable)

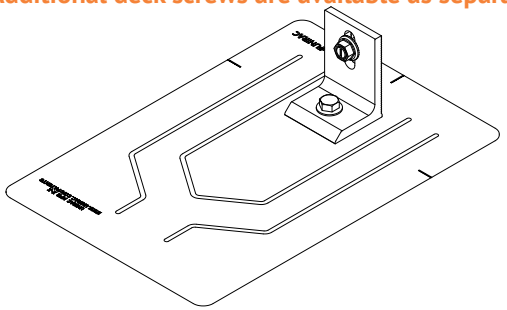

FLASHKIT PRO: Use with Stronghold Rail Clamp to secure rail through roofing material to building structure. Kit includes the following


- (1) Aluminum L-foot with EPDM Grommet
- (1) Aluminum Flashing
- (1) Stainless Steel Lag Bolt



COMBO CLAMP

- Use as a mid clamp or an end clamp to secure and electrically bond modules to rails.
- Aluminum clamp with stainless-steel bonding pins, stainless-steel hex bolt, and plastic spring clip.
- Available in mill or dark finish.


Rated for Single Use Only



US DOMESTIC COMBO CLAMP


- Use as a mid clamp or an end clamp to secure and electrically bond modules to rails.
- Aluminum clamp with stainless-steel bonding cones, stainless-steel hex bolt, and plastic spring clip.
- Available in dark finish.

Rated for Multi Use

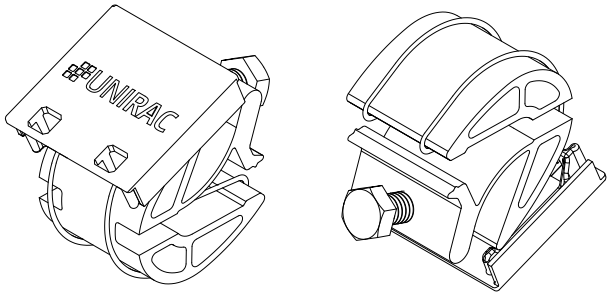

HIDDEN END CLAMP KIT


- Used as an end clamp to secure the modules to rails.
- The aluminum clamp is assembled with a stainless steel hex bolt, and a plastic end cap using a twist tie.



MLPE AND GROUNDING LUG


- Use to secure MLPE devices and ground wires to rails.
- Pre-assembled T-nut with stainless-steel bolt, stainless-steel grounding plate, and plastic retention clip.

Rated for Single Use Only



NS WIRE MANAGEMENT CLIP


Pre-assembled clamp to secure wires between rails.

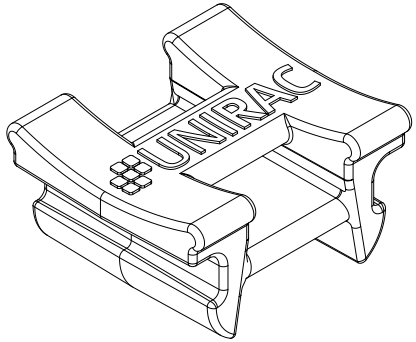

WIRE MANAGEMENT CLIP


Tool-less snap-in rail clip used to retain wires in rail or to secure wires between rails when used with a wire tie.

NOTE: Multi-use components are tested to maintain bonding functionality for a maximum of five (5) installation cycles.




METAL ROOF RAIL CLAMP

- Use to secure rails to metal roof attachments.
- Pre-assembled aluminum clamp with stain-less-steel bolt.

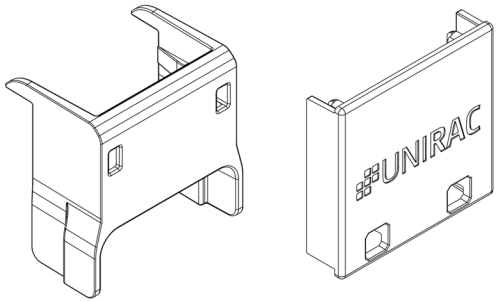


NXT UMOUNT RAIL END CAPS

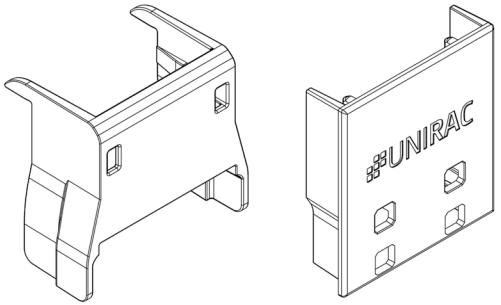


NXT UMOUNT HD RAIL END CAPS

- NXT UMOUNT Rail End Caps are engineered to provide a secure, seamless fit onto NXT UMOUNT rails.
- Designed for easy installation, they effectively close off the open ends of rails, enhancing the system's finished appearance.
- In addition to improving aesthetics, the end caps help prevent pests and debris from entering the hollow rail cavities, contributing to the long-term durability and performance of the system.




NXT S-5-S MINI ASSEMBLY

- Use to secure rails to metal roof.
- Pre-assembled rail clamp with S-5-S Mini roof attachment.




NXT S-5-N MINI ASSEMBLY

- Use to secure rails to metal roof.
- Pre-assembled rail clamp with S-5-N Mini roof attachment.



NXT S-5-V MINI ASSEMBLY

- Use to secure rails to metal roof.
- Pre-assembled rail clamp with S-5-V Mini roof attachment.



NXT S-5! PROTEA BRACKET ASSEMBLY

- Use to secure rails to metal roof.
- Pre-assembled rail clamp with S-5 Protea Bracket.

WRENCHES AND TORQUE		
COMPONENT	**WRENCH OR SOCKET SIZE**	**RECOMMENDED TORQUE (FT-LBS)**
Rail Splice	1/2”	15
HD Rail Splice	1/2”	15
Stronghold Rail Clamp	1/2”	20
Combo Mid-End Clamp	1/2”	15
US Domestic Combo Mid-End Clamp	1/2”	12
Hidden End Clamp	1/2”	15
MLPE & Grounding Lug	1/2”	10
NS Wire Management Clip	1/2”	3-7
Metal Roof Rail Clamp	1/2”	15
Stronghold Attachment #14 Screw	3/8"	#N/A
NXT S-5-S MINI ASSEMBLY*	1/2”	13
NXT S-5-N MINI ASSEMBLY*	1/2”	13
NXT S-5-V MINI ASSEMBLY*	1/2”	13
NXT S-5 PROTEA BRACKET ASSEMBLY*	1/2”	13

** These values apply only to the hardware used to secure the Metal Roof Rail Clamp to the S-5! roof attachment. Refer to S-5! installation guidance for requirements related to attaching S-5! components to the roof.*

⚠ CAUTION

Any components showing signs of damage that compromise safety shall be replaced immediately.

PART	DESCRIPTION	PART NUMBER	MADE IN USA PART NUMBER
RAIL	NXT UMOUNT RAIL - 168" MILL	168RLM1	168RLM1-US
	NXT UMOUNT RAIL - 168" DARK	168RLD1	168RLD1-US
	NXT UMOUNT RAIL - 185" MILL	185RLM1	185RLM1-US
	NXT UMOUNT RAIL - 185" DARK	185RLD1	185RLD1-US
	NXT UMOUNT RAIL - 96" MILL	096RLM1	096RLM1-US
	NXT UMOUNT RAIL - 96" DARK	096RLD1	096RLD1-US
	NXT UMOUNT RAIL - 84" MILL	084RLM1	084RLM1-US
	NXT UMOUNT RAIL - 84" DARK	084RLD1	084RLD1-US
	NXT UMOUNT HD RAIL - 185" MILL	185NUHDM	185NUHDM-US
	NXT UMOUNT HD RAIL - 185" DARK	185NUHDD	185NUHDD-US
	NXT UMOUNT HD RAIL - 246" MILL	246NUHDM	246NUHDM-US
	NXT UMOUNT HD RAIL DARK - 246" DARK	246NUHDD	246NUHDD-US
RAIL SPLICE	NXT UMOUNT RAIL SPLICE	RLSPLCM2	RLSPLCM2-US
	NXT UMOUNT HD RAIL SPLICE	NUHDSPLC	NUHDSPLC-US
STRONGHOLD ATTACHMENT KIT	STRONGHOLD ATT KIT COMP MILL	SHCPKTM1	N/A
	STRONGHOLD ATT KIT COMP DRK	SHCPKTD1	N/A
STRONGHOLD RAIL CLAMP	STRONGHOLD RAIL CLAMP MILL	SHCLMPM2	SHCLMPM2-US
	STRONGHOLD RAIL CLAMP DRK	SHCLMPD2	SHCLMPD2-US
STRONGHOLD BUTYL ATTACHMENT KIT	STRONGHOLD BUTYL ATT KIT #14S MILL	SHBUTYLM2	SHBUTYLM2-US
	STRONGHOLD BUTYL ATT KIT #14S DARK	SHBUTYLD2	SHBUTYLD2-US
FLASHKIT PRO	FLASHKIT PRO, DRK 10PK	004055D	N/A
	FLASHKIT PRO, MILL 10PK	004055M	N/A
COMBO CLAMP	NXT UMOUNT COMBO CLAMP - MILL	CCLAMPM1	N/A
	NXT UMOUNT COMBO CLAMP - DARK	CCLAMPD1	CCLAMPD1-US
	NXT UMOUNT US DOMESTIC COMBO CLAMP - DARK	N/A	NUCCLAMPD2-US
HIDDEN END CLAMP KIT	NXT HIDDEN END CLAMP W/ CAP	NUHECLMP1	N/A
MLPE AND GROUNDING LUG	NXT UMOUNT MLPE & GROUNDING LUG	NULGMLP1	NULGMLP1-US
NS WIRE MANAGEMENT CLIP	NXT UMOUNT NS WIRE MGMT CLIP	WRMCNSD1	N/A

Components List (Continued on Next Page)

PART	DESCRIPTION	PART NUMBER	MADE IN USA PART NUMBER
WIRE MANAGEMENT CLIP	NXT UMOUNT WIRE MGMT CLIP	WRMCLPD1	N/A
N-S BONDING CLAMP	MODULE-TO-MODULE N-S BONDING CLAMP	008000U	N/A
WIRE BONDING CLIP W/ 8AWG	WIRE BONDING CLIP W/ 8AWG	008015S	N/A
EXTRA BUTYL PATCHES	EXTRA BUTYL PAD - SH, KIT	XTRABUTL-SH	XTRABUTL-SH-US
DIRECT-TO-DECK SCREWS	#14-14 x 3.0 TYPE AB	003251W	N/A
METAL ROOF RAIL CLAMP	RAIL CLAMP ASSEMBLY MILL, METAL ROOF	NUMTLCLMPM	NUMTLCLMPM-US
	RAIL CLAMP ASSEMBLY DARK, METAL ROOF	NUMTLCLMPD	NUMTLCLMPD-US
MLPE MOUNT	UNIVERSAL MLPE MOUNT	N/A	MLPEMNT-US
END CAPS	NXT UMOUNT RAIL AND COMBO CLAMP CAP KIT	NUENDCAPKIT	N/A
	NXT UMOUNT HD RAIL AND COMBO CLAMP CAP KIT	NUHDENDCAPKIT	N/A
NXT S-5-S MINI ASSEMBLY	NXT S-5-S MINI ASSY	N/A	NUS5S-MI-US
NXT S-5-N MINI ASSEMBLY	NXT S-5-N MINI ASSY	N/A	NUS5N-MI-US
NXT S-5-V MINI ASSEMBLY	NXT S-5-V MINI ASSY	N/A	NUS5V-MI-US
NXT S-5 PROTEA BRACKET ASSEMBLY	NXT S-5 PROTEA BRACKET ASSY	N/A	NUS5PROBKT-US

PLANNING YOUR NXT UMOUNT INSTALLATIONS

The installation can be laid out with rails parallel to the rafters or perpendicular to the rafters. Note that NXT UMOUNT rails make excellent straight edges for doing layouts.


Center the installation area over the structural members as much as possible. Leave enough room to safely move around the array during installation. Some building codes and fire codes require minimum clearances around such installations, and the installer should check local building code requirements for compliance.

The length of the installation area is equal to:

- the total width of the modules,
- plus 1/2" for each space between modules (for mid- clamp),
- plus 2" minimum (1" minimum for each MODULE END) (This will not be included when we use the hidden end clamp.)

LAYING OUT ROOF ATTACHMENTS


Locate and mark the position of the roof attachment within the installation area. Refer to Unirac NXT UMOUNT D&E Guide & U-Builder for rail spans and cantilevers. Follow module manufacturer installation requirements allowable spacing based on appropriate mounting locations. Modules should be placed such that they overhang the rails symmetrically.

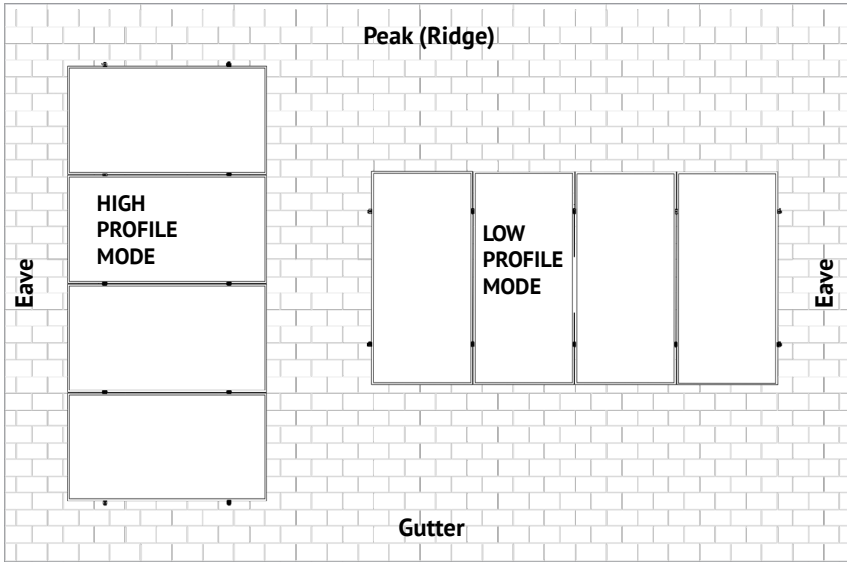

NXT Rail Splices are fully structural and do not interfere with roof attachments or Combo Clamps. There is no need to determine splice locations at this stage.

⚠ CAUTION

Rail lengths and locations of L-feet for expansion joints will need to be determined at this stage in planning the array layout. For expansion joint requirements, See Page 9.

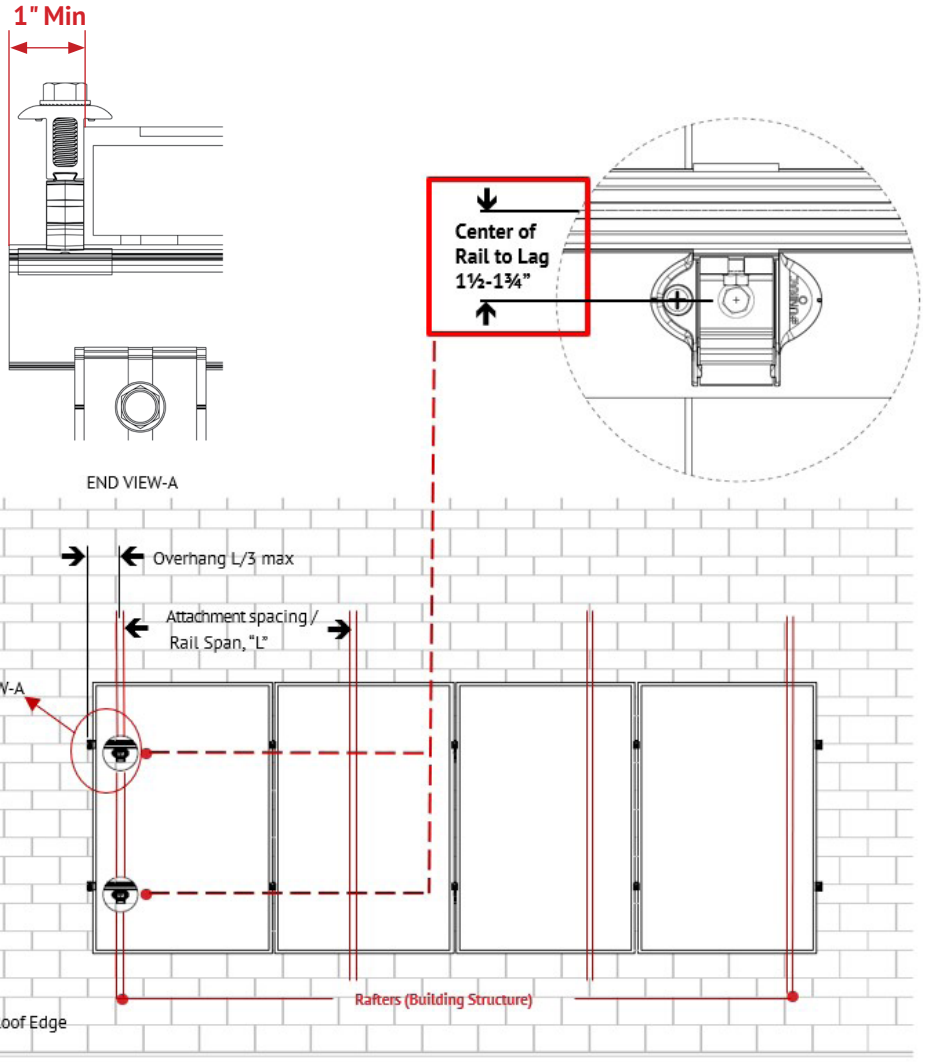


EXPANSION JOINT USED AS THERMAL BREAK

Expansion joints prevent buckling of rails or system connection failure due to thermal expansion. Determine location of expansion joints prior to installation of roof attachments and rails. To create a thermal expansion joint, provide a sufficient gap between rails for proper installation of end clamps and tooling to achieve required torque. A thermal break is required when a continuous length of spliced rails exceeds the maximum allowable lengths shown in the table to the right. For additional concerns on thermal breaks in your specific project, please consult a licensed structural engineer.

Rails in expansion joint configurations are considered cantilevered and must follow the cantilever rule on both sides of the expansion joint, which states that the maximum amount of rail that can be cantilevered is 1/3 the respective adjacent span. An expansion joint must not be spanned by a PV module. Installing a module over an expansion joint would defeat the goal of a thermal break and could result in damage to the array.

Bonding connection for splice used as a thermal break. Option shown uses two Ilsco lugs (Model No. GBL-4DBT P/N GBL-4DBT - see product data sheet for more details) and solid copper wire. Optional grounding may be achieved through NXT UMOUNT MLPE & Lug Clamp. See Page 47.

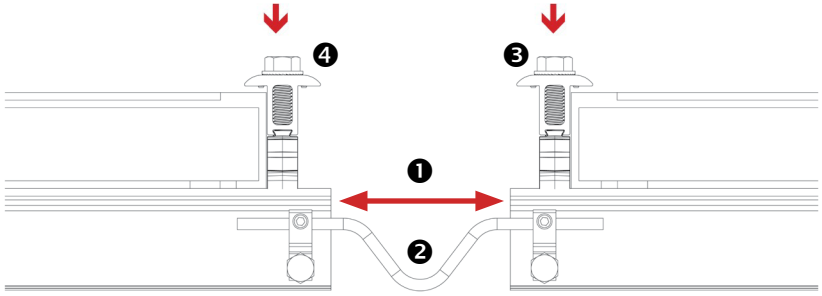

❶ Provide a sufficient gap between rails for proper installation of end clamps and tooling

❷ Connect rails with the bonding wire.


❸, ❹ Install end clamps. **See Page 29.**

	Maximum Continuous Length (ft.) of Spliced rails with Stronghold Attachments							
	FlashKit Attachment Span		Stronghold Attachment Span		Butyl Attachment W/#12 Screw		Butyl Attachment W/#14 Screw	
ΔT (°F)	**48”**	**72”**	**48”**	**72”**	**48”**	**72”**	**48”**	**72”**
0-40	100	126	92	114	76	90	84	102
40-50	92	114	84	102	68	78	68	90
50-60	84	102	76	90	60	78	68	78
60-70	76	90	68	78	52	66	60	66
70-80	68	90	60	78	52	60	52	66
80-90	68	78	60	66	44	54	52	60
90-100	60	78	52	64	44	48	52	54
100-120	60	66	52	53	40	40	44	45
120-140	52	57	44	45	34	34	36	39

The values displayed are the maximum allowed rail length, in feet, without a thermal break. If your span is less than 48” or using NXT UMOUNT HD rail, refer to the NXT UMOUNT Design & Engineering Guide for max lengths of continuous rail before a thermal break is required.

Determine the maximum rail temperature difference (ΔT) between the time of installation and the extreme high or low temperature. The Extreme Annual Design Conditions table at the following URL can be used as a reference when determining ΔT. ***http://ashrae-meteo.info/***. The installer is responsible for determining the maximum temperature difference (ΔT) used to establish the maximum rail length.

As spans increase, so does the maximum reaction force that the rail exerts on the L-foot. Ensuring that the Maximum Reaction Forces do not exceed the shear capacity of the roof connection. See NXT UMOUNT Design & Engineering Guide for corresponding reaction forces.

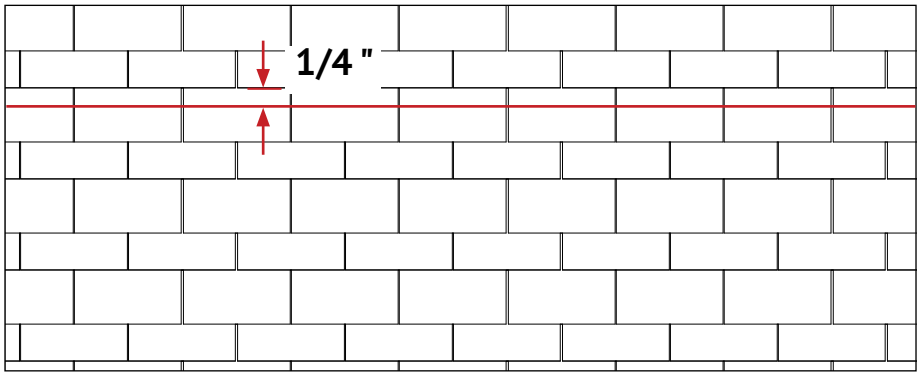

MARK ARRAY LOCATION:

- Clean the roof surface. Remove all dirt, debris, snow, and ice.
- Mark the array layout on the roof and determine roof attachment locations based on the array layout.
- Snap chalk lines to define each row of attachment points.
- For shingle roofs, snap chalk lines 1/4 in. below the upslope edge of the shingle course.
- Locate rafters and mark their positions at the intersection with the chalk lines.
- Verify attachment spacing per the Design and Engineering Guide or project-specific U-Builder Engineering Report.

PRO TIP


Install the attachment within 1/4" of the chalkline to allow the rail to slide freely in the rail clamp.

⚠ WARNING

- **To maintain butyl flashing performance, Unirac does not recommend installing when ambient and/or roof temperatures are below 0°F or above 180°F.**
- **Stronghold Butyl must be installed on a clean, dry surface to ensure flashing integrity.**

NOTE:

- **Stronghold Butyl is designed for use on Asphalt Shingle, Rolled Comp, EPDM, TPO, Polyethylene, Polypropylene, ABS, and Metal Roofs (including Galvalume, painted steel, and galvanized).**
- **Pilot holes are not necessary to be drilled for self-drilling screws. If holes are drilled to identify the rafter, they should be backfilled with sealant before installing the attachment.**
- **Stronghold Butyl attachments are designed for slopes ranging from 0 to 90-degrees. For installations over 45-degrees, contact Unirac engineering for design guidance.**

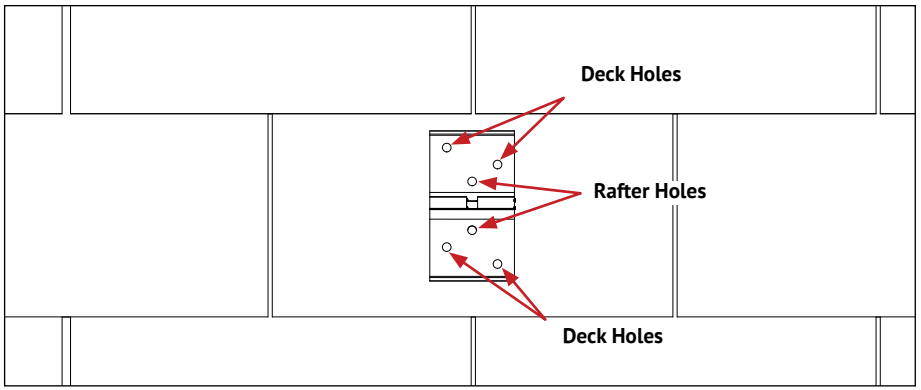

PLACE STRONGHOLD ATTACHMENT WITH BUTYL BASE:

- Identify the position of the attachment to install before peeling the release paper.
- Ensure that the attachment lands on a flat surface. If the surface at the location of the attachment is uneven, add butyl patches to flatten the surface.

NOTE:
See Pages 10 to 12 for instructions on rafter vs. decking installation and which screw holes to use


⚠ CAUTION

Do not peel the release paper from the butyl on attachment before identifying the position of attachment to install.

⚠ WARNING

- **Do not install the attachment on uneven surfaces or shingle overlaps greater than 1/8".**
- **Uneven mounting surfaces can create voids between the adhesive and the roof, increasing the risk of water leakage.**

NOTE:
See Page 15 for instructions on placing extra butyl pads or contact Unirac team for further information.

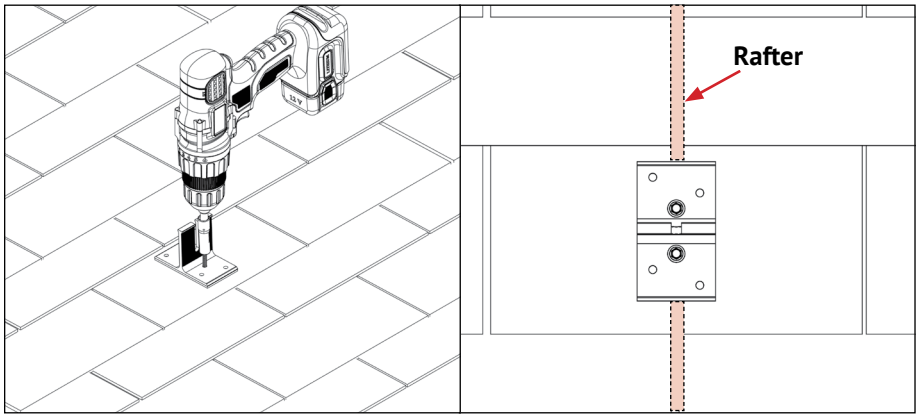

INSTALL STRONGHOLD ATTACHMENT WITH BUTYL BASE TO RAFTER:


- Peel off the release liner from the underside of the attachment.
- Place the StrongHold attachment over the rafter location and align the edge of the mount with the horizontal chalk line.
- Secure the attachment by installing two (2) provided rafter screws through the designated rafter holes into the rafter.

NOTE:
Ensure to use drill extension or deep socket tool for installing rafter screws.

⚠ CAUTION

- ***To determine if the screw is engaging the rafter, there should be resistance to driving the screw through the entire length. If the screws do not properly engage the rafter, refer to the Pro Tip in Page 11.***
- ***It is recommended to begin installation with the screws on the uphill side of the attachment and continue installing the screws on the downhill side of the attachment for best fit.***


⚠ WARNING




Do not over-torque the structural screw.
When proper torque is applied, the EPDM washer should slightly expand out from the sides as shown in the image.

PRO TIP:


If you miss the rafter while driving the first screw and the rafter is on the edge of the attachment, then follow the steps below:

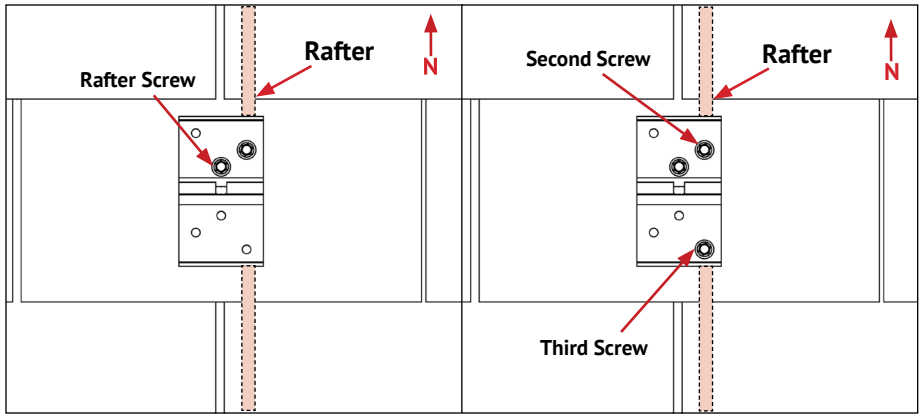


- Install a second screw in the adjacent hole closest to the rafter center.
- If the second screw engages the rafter, install the corresponding third screw into the rafter and proceed with standard installation.

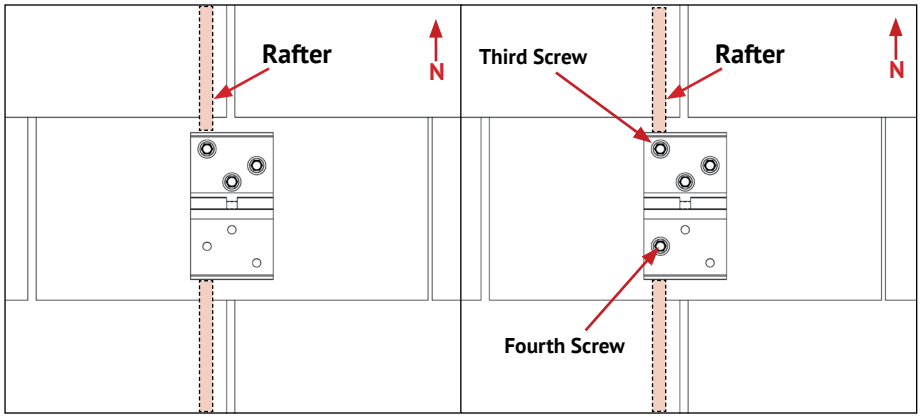

- If the second screw does not engage the rafter, install a third screw on the same uphill side.
- If the third screw engages the rafter, install the corresponding fourth screw into the rafter and and proceed with standard installation.

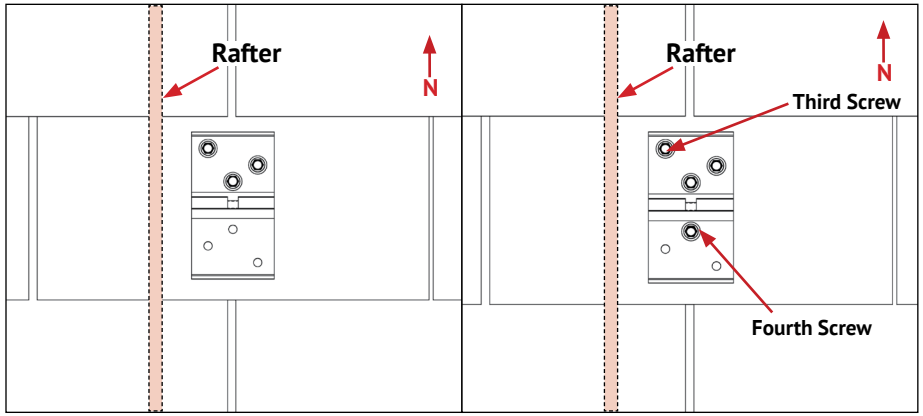

- If the rafter is not engaged after the third screw, follow the direct-to-deck installation procedure and reduce attachment spacing per Unirac direct-to-deck span requirements.

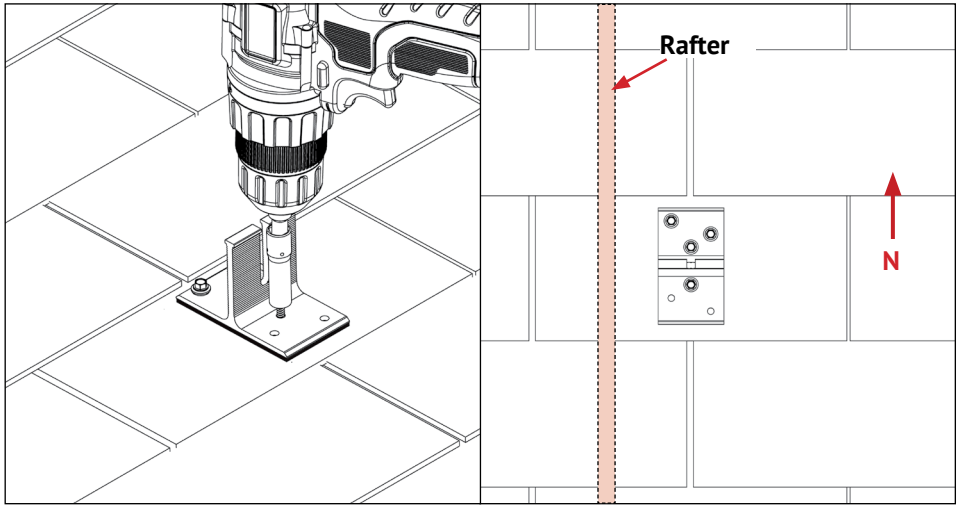

INSTALL STRONGHOLD ATTACHMENT WITH BUTYL BASE TO DECK (DIRECT TO DECK):

- When installing the attachment directly to the roof deck (not to a rafter), install four (4) screws on attachment.
- Install screws in any four (4) attachment holes.


Note:


- **Additional deck screws are NOT included in the KIT. Must be purchased separately.**
- **Maintain stock of additional deck screws from Unirac Kits in case of direct-to-deck installation.**


⚠ CAUTION


1. **Allowable attachment spans may change for direct-to-deck applications.**
2. **Unirac recommended spans are only valid with Unirac supplied screws.**

INSTALL STRONGHOLD DTD BUTYL ATTACHMENT ON SHINGLE OVERLAP (> 1/8" THICKNESS)

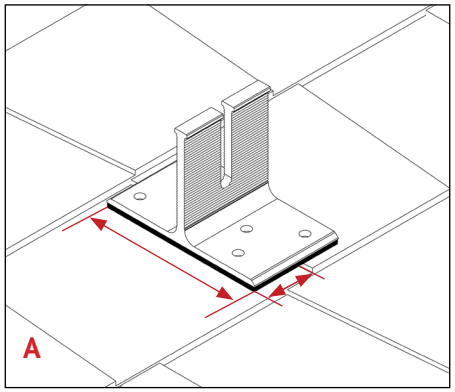

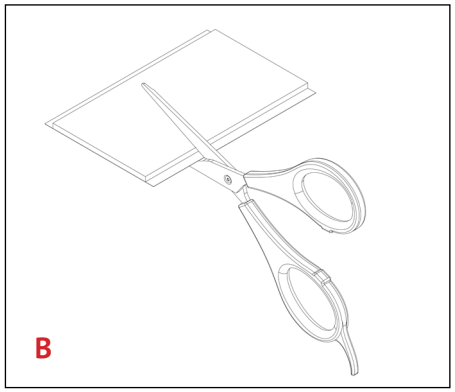

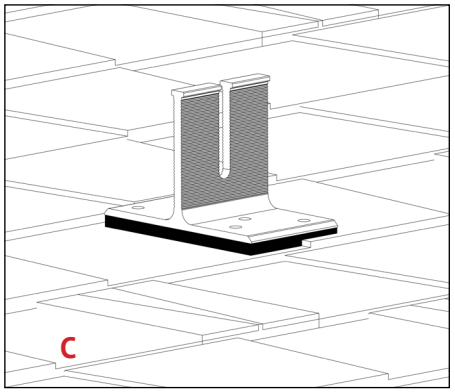

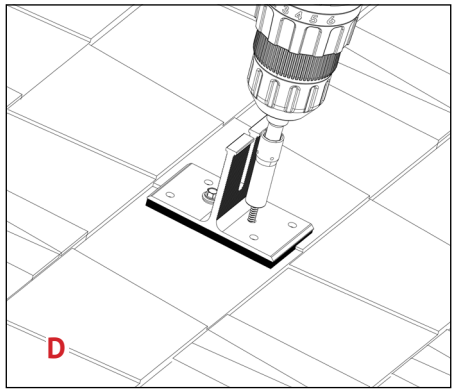

If the attachment falls over a shingle overlap having thickness over 1/8", level the surface by following below steps:


A. Measure the attachment overhang.
B. Cut the butyl pads to required size.
C. Stack extra butyl pad layers as necessary to level the roof and place the attachment.
D. Begin installation with the screws on the uphill side of the attachment and continue to install the screws on the downhill side of the attachment.

NOTE:

- **Extra Butyl Patches (XTRABUTL/-US) are not required when installing the Stronghold Butyl Attachment on shingle steps or courses with a thickness up to 1/8".**
- **Extra butyl pads are NOT included in the KIT.**
- **Pre-stock with extra butyl pads from Unirac Kits in case installation is required over overlap or gap.**

⚠ WARNING


- **Do not install the attachment on uneven surfaces or shingle overlaps greater than 1/8"**
- **Uneven mounting surfaces can create voids between the adhesive and the roof, increasing the risk of water leakage and rail clamp misalignment.**

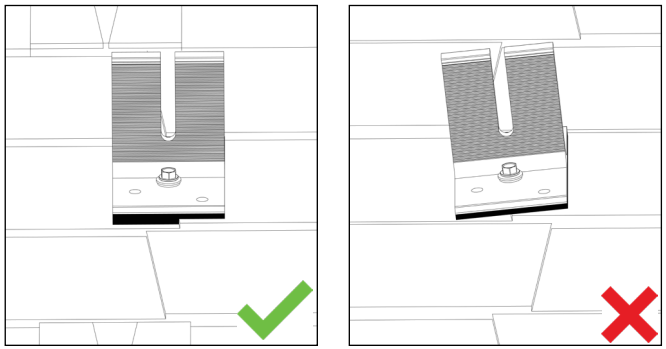



INSTALL STRONGHOLD DTD BUTYL ATTACHMENT ON SHINGLE COURSE OVERLAP (> 1/8" THICKNESS)

CASE 1: PREVENT EXTRA BUTYL PADS USAGE

- If the attachments overlap from one shingle course to the next shingle course in a rail-based system, reposition the attachment by moving up or down the shingle course along the same rafter line to avoid butyl layering.

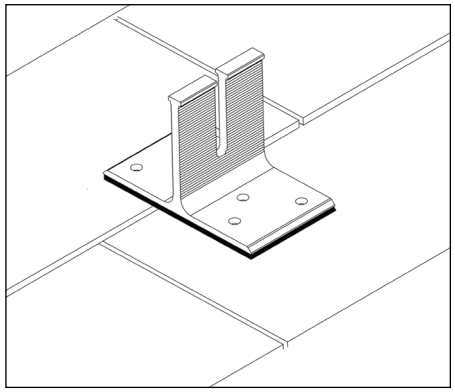

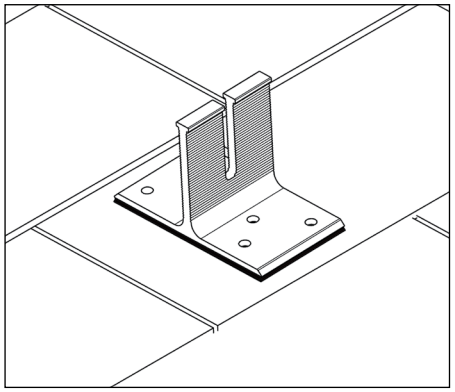


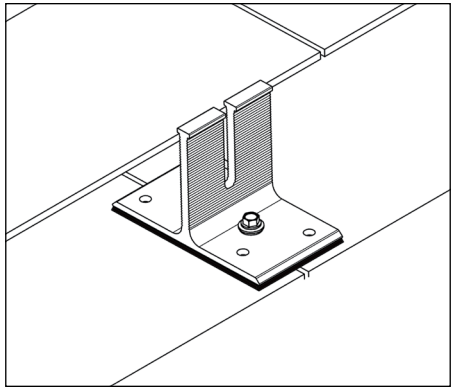



NOTE:


- **Additional butyl layering is not required while installing attachment over a gap in the same shingle course**

CASE 2: SHINGLE COURSES REQUIRES ADDITIONAL BUTYL PADS

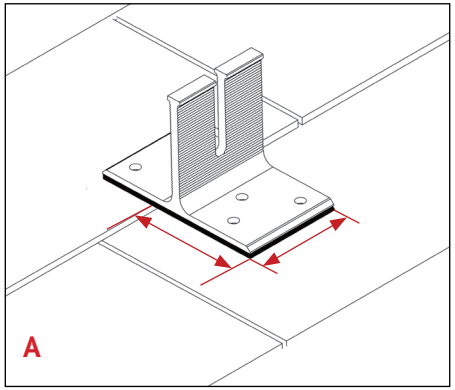

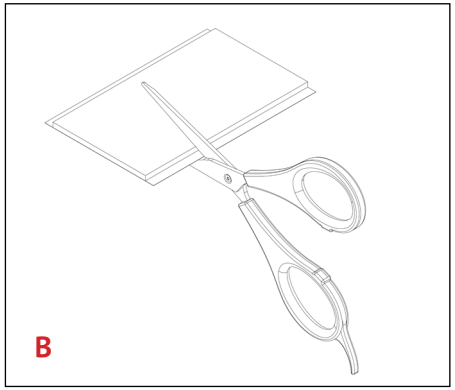


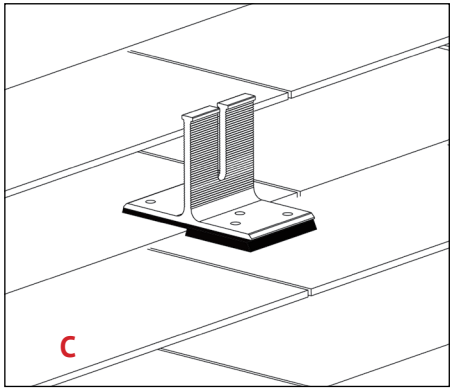


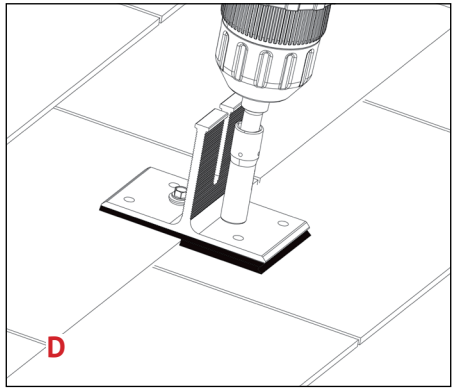

If the attachment falls over a shingle overlap having thickness over 1/8", level the surface by following below steps:


A. Measure the attachment overhang.
B. Cut the butyl pads to required size.
C. Stack extra butyl pad layers as necessary to level the roof and place the attachment.
D. Begin installation with the screws on the uphill side of the attachment and continue to install the screws on the downhill side of the attachment.

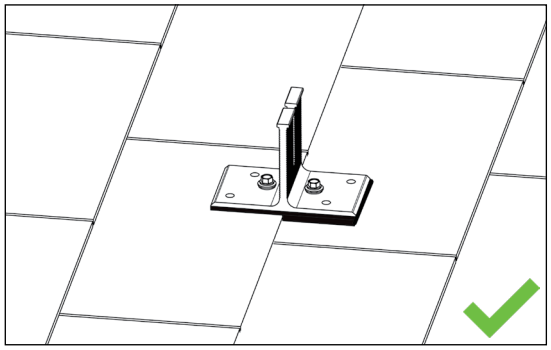

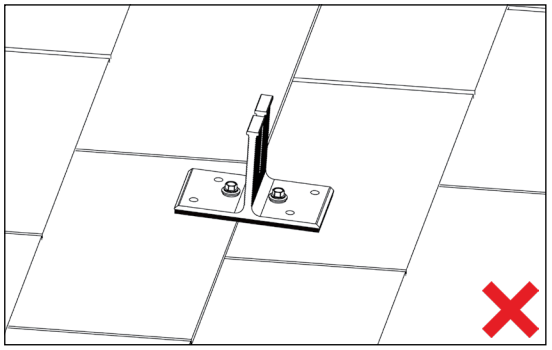


WARNING

Installing attachments on uneven surfaces or shingle overlaps greater than 1/8" creates a risk for water leakage and rail clamp misalignment due to gap created between the adhesive and roof surface.

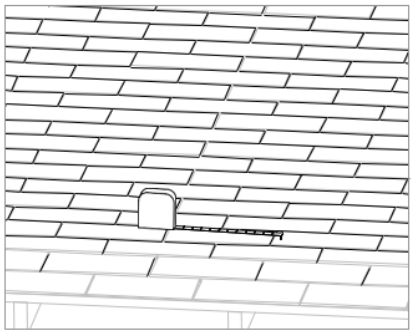

MARK ARRAY LOCATION:
Mark array location and determine roof attachment locations based on array layout. Snap chalk lines to mark each row of roof attachment points. On shingle roofs, snap lines 1-3/4" below upslope edge of shingle course. Locate rafters and mark at intersection of attachment lines. Attachment spacing determined per Design and Engineering Guide or project specific U-Builder Engineering Report .

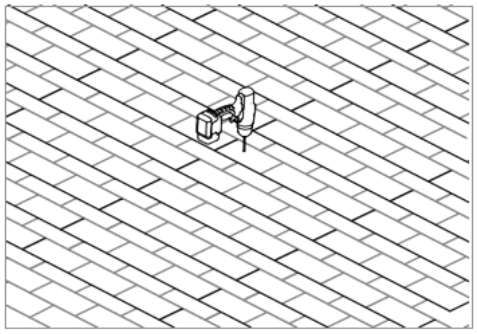


DRILL PILOT HOLES: Drill a 7/32" pilot hole at each roof attachment. Clean roof surface of dirt, debris, snow, and ice. Fill each pilot hole with sealant.

⚠ CAUTION


In case of missing a rafter, fill in the pilot hole with sealant.

Pro Tip:
Drill pilot holes within 1/4'" of chalkline to allow rail to slide freely in Rail Clamps. See Page 23.

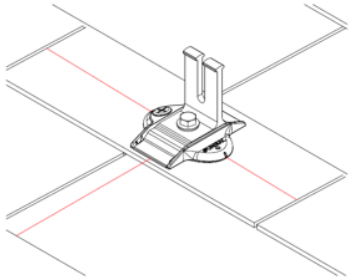


INSTALL STRONGHOLD ATTACHMENT BASE:
Place the Stronghold attachment base assembly over the pilot hole. Align indicator marks of mount with chalk line. Drive lag bolt until mount is held firmly in place. The EPDM washer should compress and expand slightly beyond the outside edge of the steel washer when the proper torque is applied.

Note: Rail clamp can be installed in four orientations. See Page 21 for a detailed view.

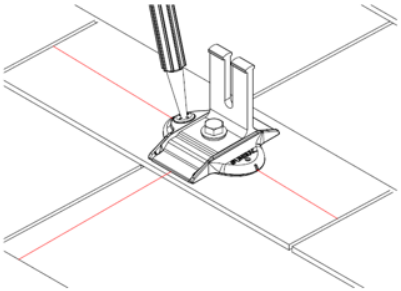

SEAL:
Insert tip of UNIRAC provided sealant into port. Inject until sealant exits vent. Follow sealant manufacturer's instructions and cold weather application guidelines, if applicable.


Note:
USE ONLY UNIRAC APPROVED SEALANTS: Chemlink Duralink 50, Chemlink M-1, Geocel 4500, Geocel S-4 or SealBond SB-500. Follow sealant manufacturer's instructions and cold weather application guidelines.



PLACE RAIL CLAMP ONTO L-FOOT:
Drop the rail clamp assembly into the open slot of L-Foot.


⚠ CAUTION

Do not tighten the rail clamp before putting in the rail.

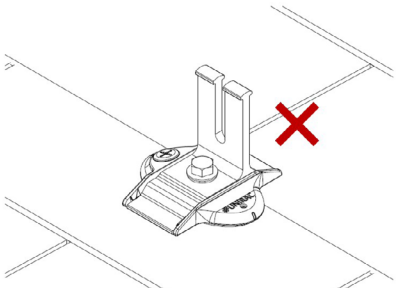


⚠ CAUTION

Avoid installing stronghold attachments across gaps or overlaps in roofing materials that are larger than 1/8 inch.

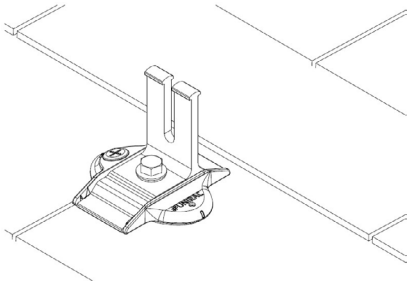


⚠ CAUTION

When installing the stronghold attachment over vertical joints, fill gap/joint with sealant between mount and upslope edge of shingle course.

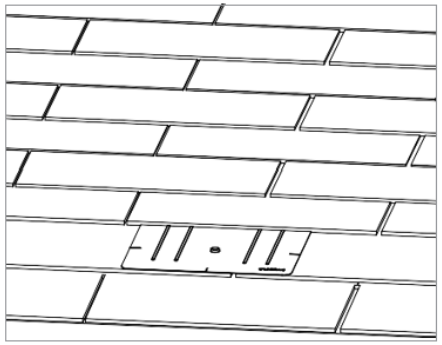


INSTALL FLASHKIT PRO FLASHING: Add a U-shaped bead of roof sealant to the underside of the flashing with the open side of the U pointing down the roof slope. Slide the aluminum flashing underneath the row of shingles directly up slope from the pilot hole as shown. Align the indicator marks on the lower end of the flashing with the chalk lines on the roof to center the raised hole in the flashing over the pilot hole in the roof. When installed correctly, the flashing will extend under the two courses of shingles above the pilot hole.

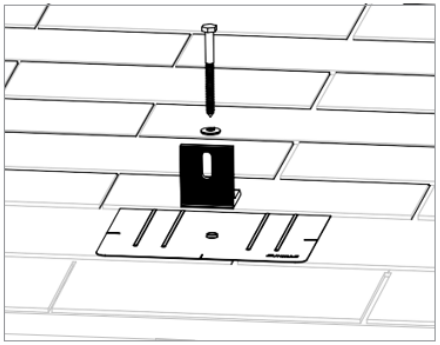


INSTALL L-FOOT: Fasten L-foot and flashing into place by passing the included lag bolt and pre-installed stainless steel-backed EPDM washer through the L-foot EPDM grommet, and the hole in the flashing, into the pilot hole in the roof rafter. Drive the lag bolt down until the L-foot is held firmly in place. The EPDM washer should compress and expand slightly beyond the outside edge of the steel washer when the proper torque is applied.

Note: FLASHKIT PRO L-FOOT can be installed in TWO orientations.
See Page 22 for detailed view.

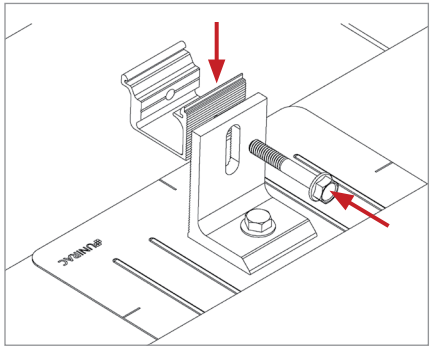

FIX RAIL CLAMP ONTO L-FOOT: Remove bolt from rail clamp. Place bolt through slot in L-foot and though hole in Rail Clamp. Partially thread holt into rail clamp, leaving the bolt loose to accept the rail.


Note: Rail Clamp can be installed on any standard L-foot.

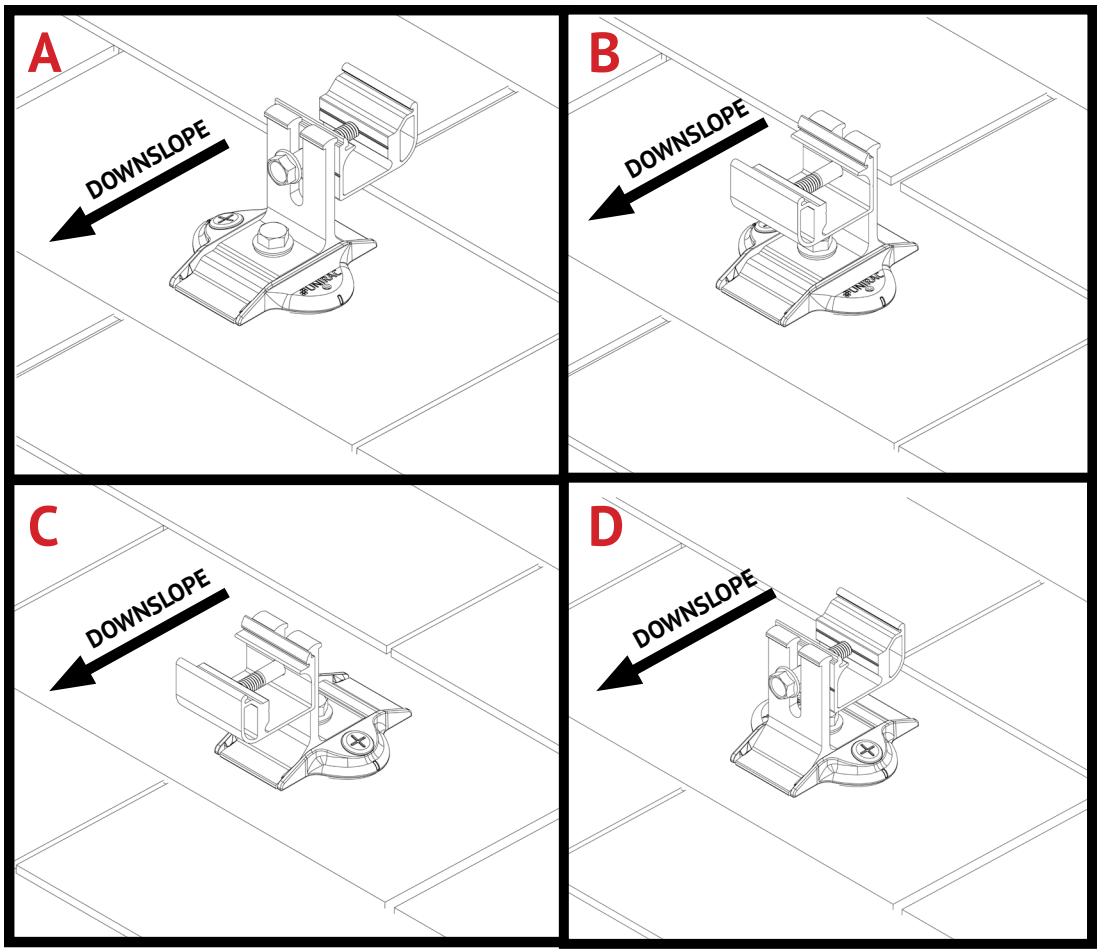

STRONGHOLD ATTACHMENT AND RAIL CLAMP ORIENTATIONS:

The Stronghold Attachment and Rail Clamp can be installed in any of four possible orientations, shown in images (A) through (D) above.


Note: For high snow loads, use orientations (C) or (D). Refer to NXT UMOUNT Design and Engineering Guide for specific requirements.

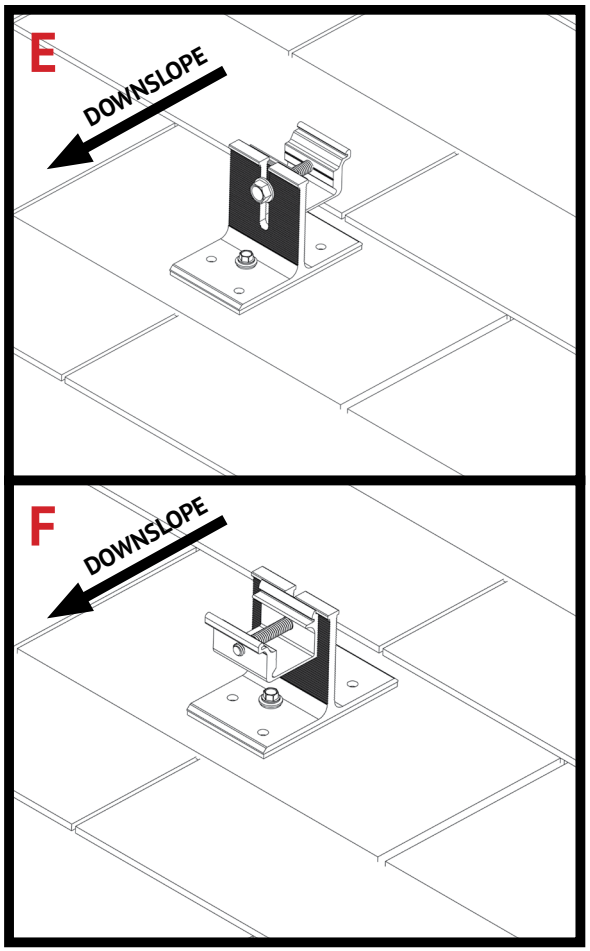

STRONGHOLD ATTACHMENT WITH BUTYL AND RAIL CLAMP ORIENTATIONS:

Stronghold Attachment with Butyl and Rail Clamp can be installed in either orientation shown in image (E) and (F) above.


Note: For high snow loads, use orientation (F). Refer to NXT UMOUNT Design and Engineering Guide for specific requirements.

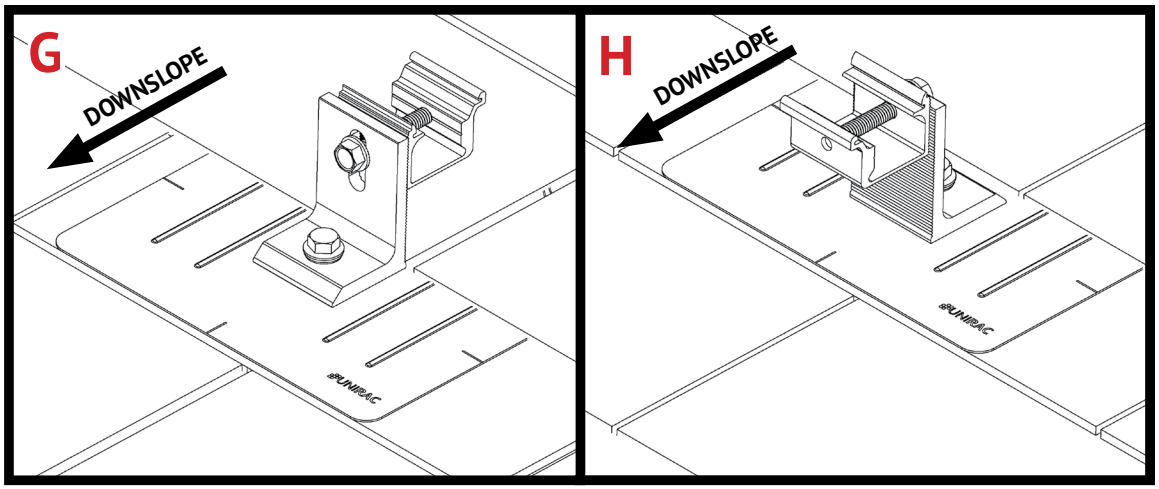

FLASHKIT PRO L-FOOT AND RAIL CLAMP ORIENTATIONS:

Flashkit Pro L-foot and Rail Clamp can be installed in either orientation shown in image (G) and (H) above.


Note: For high snow loads, use orientation (H). Refer to NXT UMOUNT Design and Engineering Guide for specific requirements.

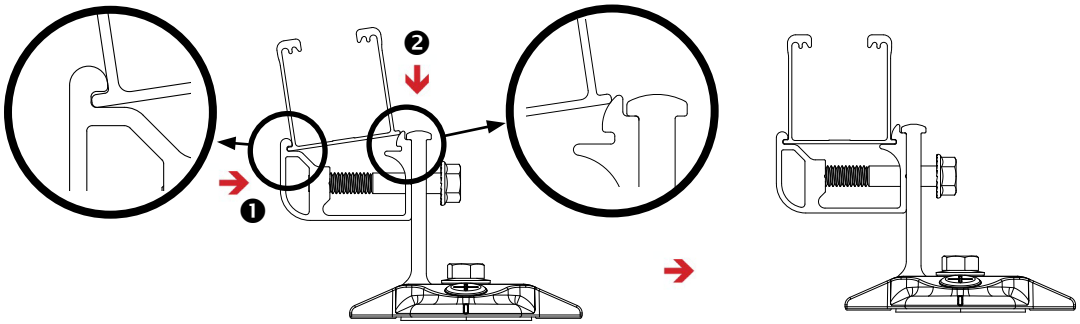

POSITION RAIL ONTO RAIL CLAMP:
With the bolt in the pre-assembled (loose) position, Insert the rail flange on one side of the clamp groove. Then click-in the other side of the rail into the clamp groove.


⚠ CAUTION

Do not tighten the rail clamp before putting in the rail.

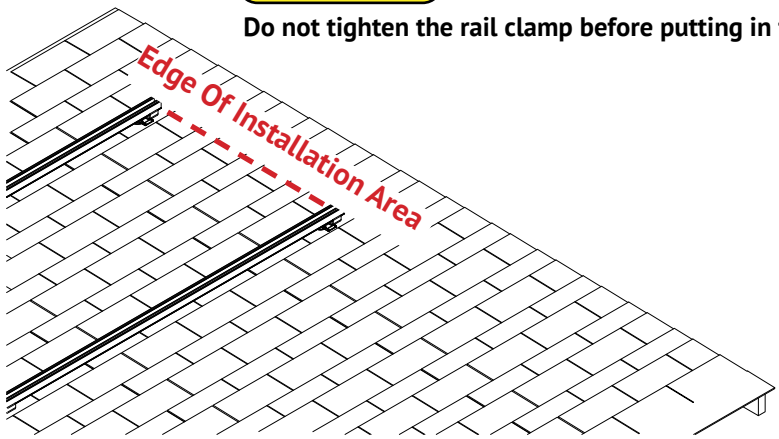


ALIGN RAILS: Align one pair of rail ends to the edge of the installation area. The opposite pair of rail ends will overhang installation area. Do not trim them off until the installation is complete. Install the first module at the aligned end. If the rails are parallel to the rafters, the aligned end of the rails should face the lower edge of the roof. Securely tighten all hardware after alignment is complete.

Mount modules to the rails as soon as possible. Large temperature changes may bow the rails within a few hours if module placement is delayed.

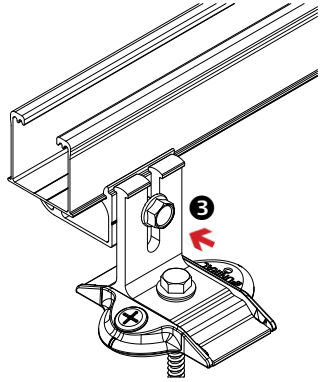

TIGHTEN RAIL ONTO RAIL CLAMP :
Adjust the rail height as needed until rail alignment is complete and tighten bolt.

TORQUE VALUE: 20 ft-lbs.

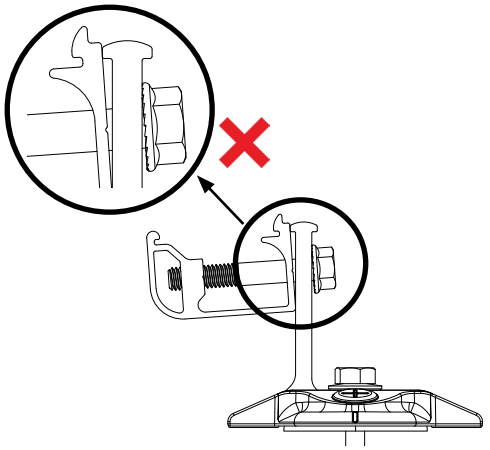

⚠ CAUTION

Rail clamp must be flush to the L-foot and positioned below the flange at the top of the L-foot.

SPLICE INSTALLATION (IF REQUIRED PER SYSTEM DESIGN)


If your installation uses NXT UMOUNT Rail Splice, attach the rails together either before installing the rail or after. Use marking on the splice for centering the connection. To install, slide the splice into the rail on each rail and drag it to the center of the marking. Tighten both bolts on each rail with an impact drill, pressing firmly until the bolt-head is flush against the splice and torqued to 15 ft-lbs. Installation is complete when the bonding hardware penetrates the opposite side of the rail, and the assembly torque is achieved.


❶,❷,❸ are the steps of installation.

TORQUE VALUE: 15 ft-lbs. Do not use Anti-Seize.

⚠ CAUTION

- **If assembling splice directly on roof, take care to prevent bolts from penetrating roof covering.**
- **While installing the splice, ensure either of the rails is not offset from the center marking.**

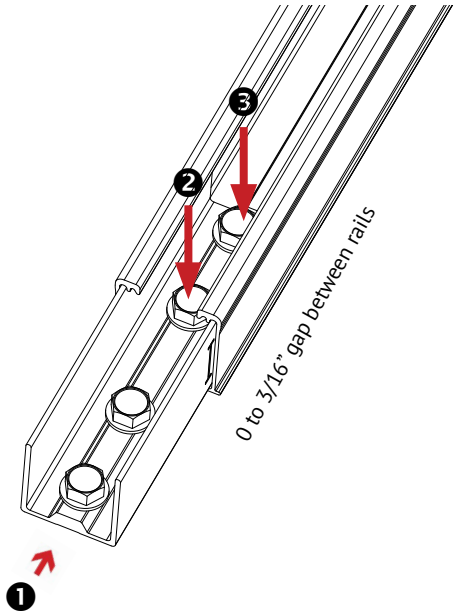

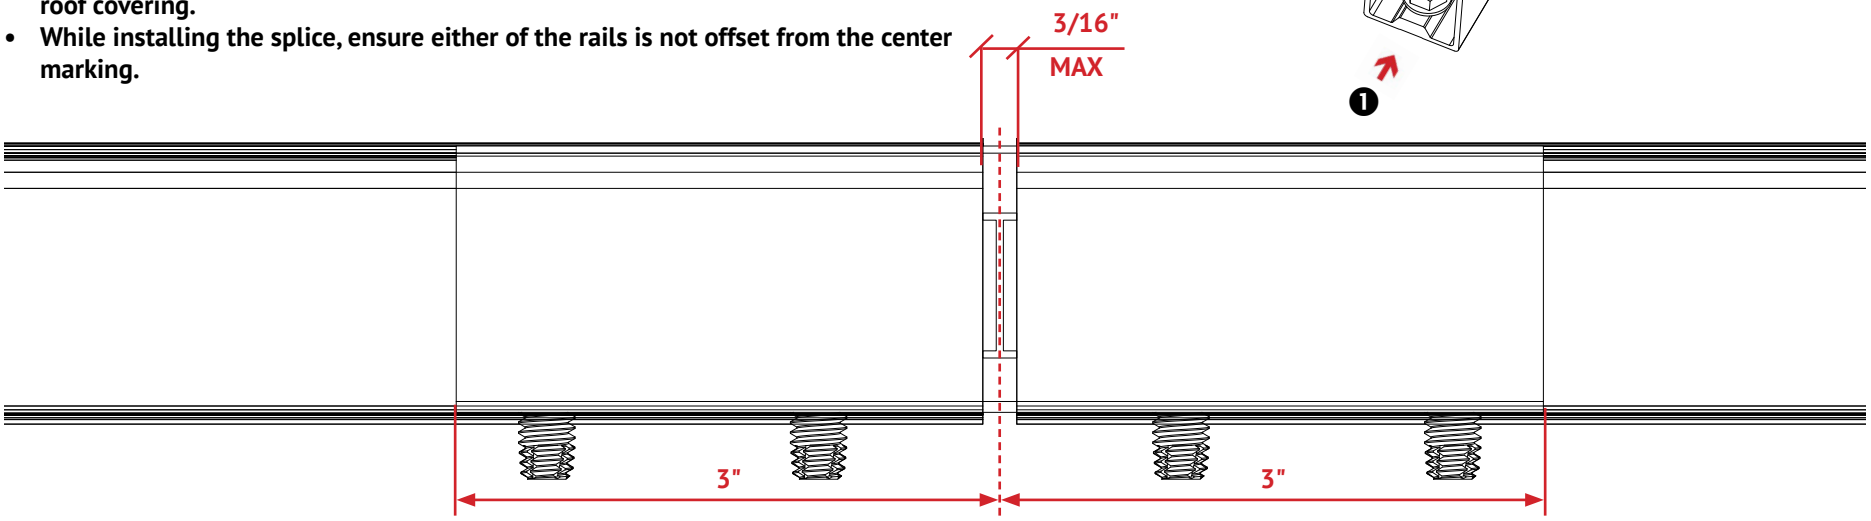

Note:

1. **Maximum gap between rails should not exceed 3/16" at splice connection**
2. **Splice certified for single-use only**

⚠ CAUTION


The Combo Clamp can be installed over the splice but cannot be centered at the gap of two rails due to placement of bonding features in the rail nut. Place Combo Clamp 1/4" to the left or right of the rail gap.

⚠ CAUTION


- **Do not install the Combo Clamp directly over the rail gap.**
- **The bonding features in the rail nut will not engage properly at the gap.**
- **Position the Combo Clamp at least 1/4 inch to the left or right of the rail gap.**

NOTE: This caution is also applicable when we use HD Rail.

Refer to *Page 29* for combo clamp installation instructions.

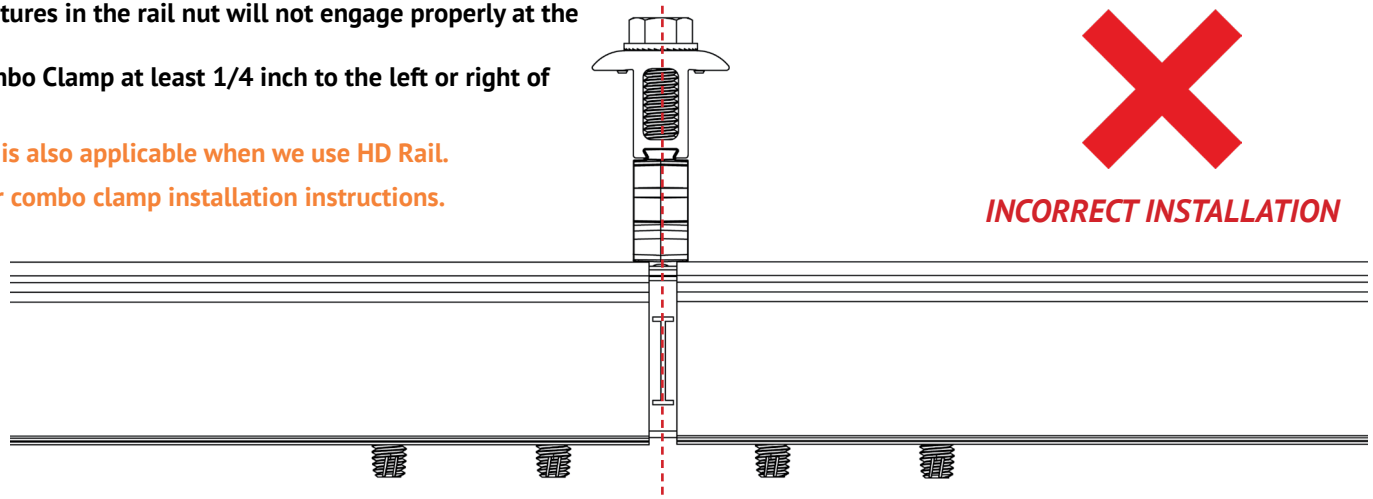

INCORRECT INSTALLATION

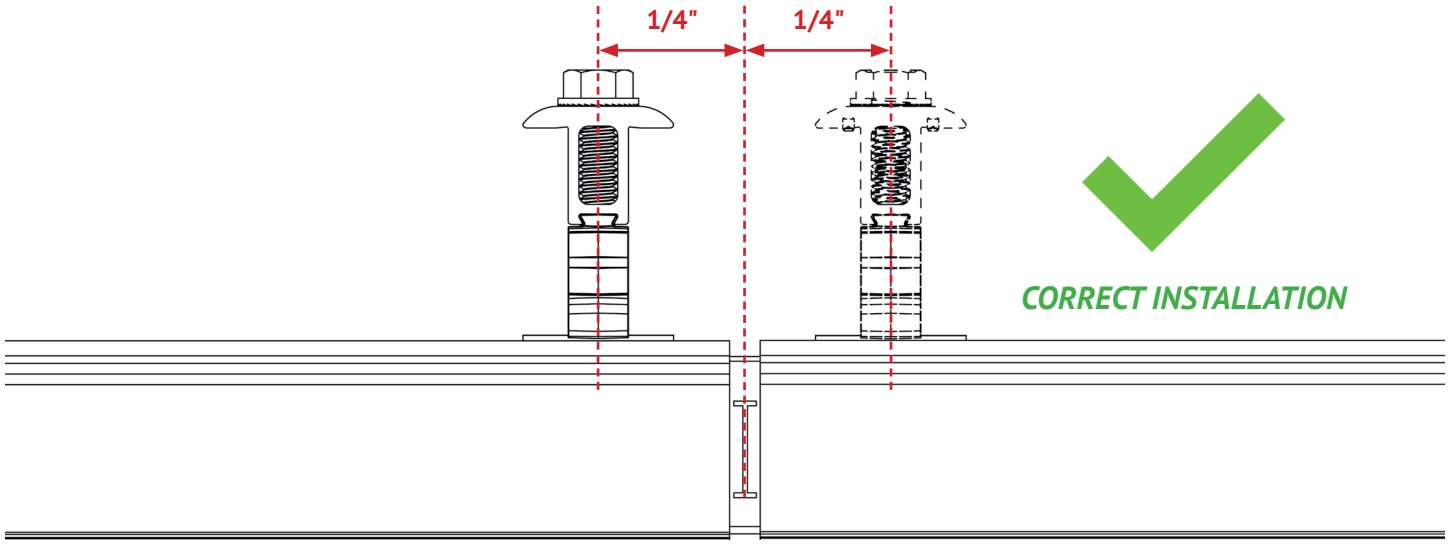


CORRECT INSTALLATION

HD SPLICE INSTALLATION (IF REQUIRED PER SYSTEM DESIGN)

If your installation uses NXT UMOUNT HD Rail Splice, attach the rails together either before installing the rail or after. Use marking on the splice for centering the connection. To install, slide the splice into the rail on each rail and drag it to the center of the marking. Tighten both bolts on each rail with an impact drill, pressing firmly until the bolt-head is flush against the splice and torqued to 15 ft-lbs. Installation is complete when the bonding hardware penetrates into the rail's closed hallow section, and the assembly torque is achieved.


❶,❷,❸ are the steps of installation.


TORQUE VALUE: 15 ft-lbs. Do not use Anti-Seize.

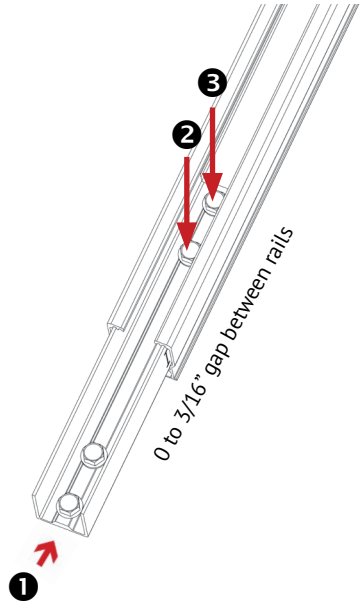

⚠ CAUTION

While installing the splice, ensure either of the rails is not offset from the center marking.

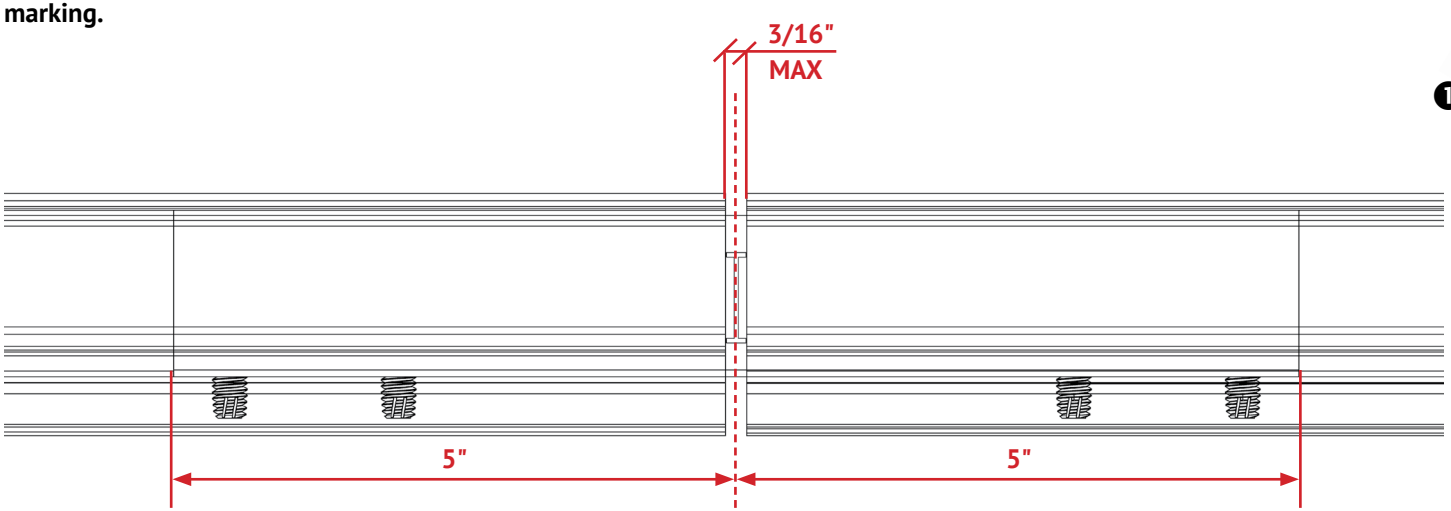





SIDE VIEW

Note:

1. **Maximum gap between rails should not exceed 3/16" at splice connection**
2. **Splice certified for single-use only**

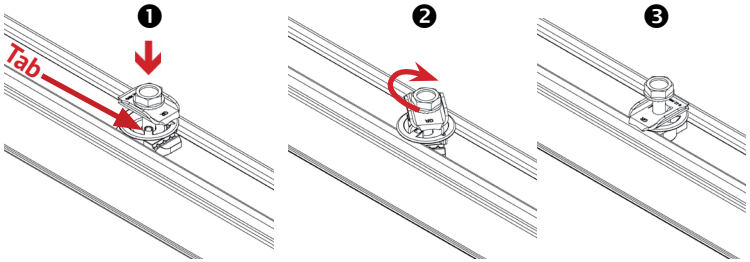


INSTALL MLPE & GROUNDING LUG: Insert the T-nut into the rail by holding the plastic cone's tabs with your thumb and middle finger. Rotate the grounding lug 90 degrees in a clockwise direction on the rail and release it when aligned with the rail. Ensure that the T-nut is engaged in the rail profile.

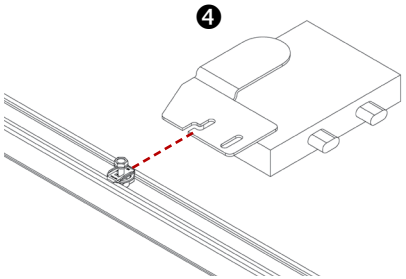

INSTALL MICROINVERTER:
Place the microinverter between the ground plate and the rail. Engage it to bolt.


NOTE: MLPE & GROUNDING LUG is single use only

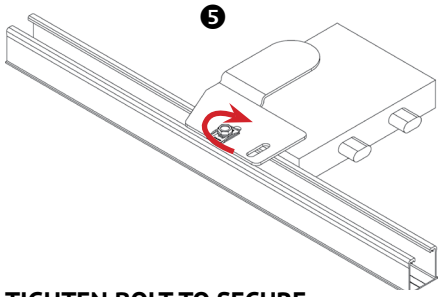

TIGHTEN BOLT TO SECURE:

TORQUE VALUE: 10 ft-lbs.

Quick Tip: To remove the MPLE & Grounding Lug from the rail, hold the plastic cone's tabs with your thumb and middle finger. Rotate anticlockwise by pressing downward.

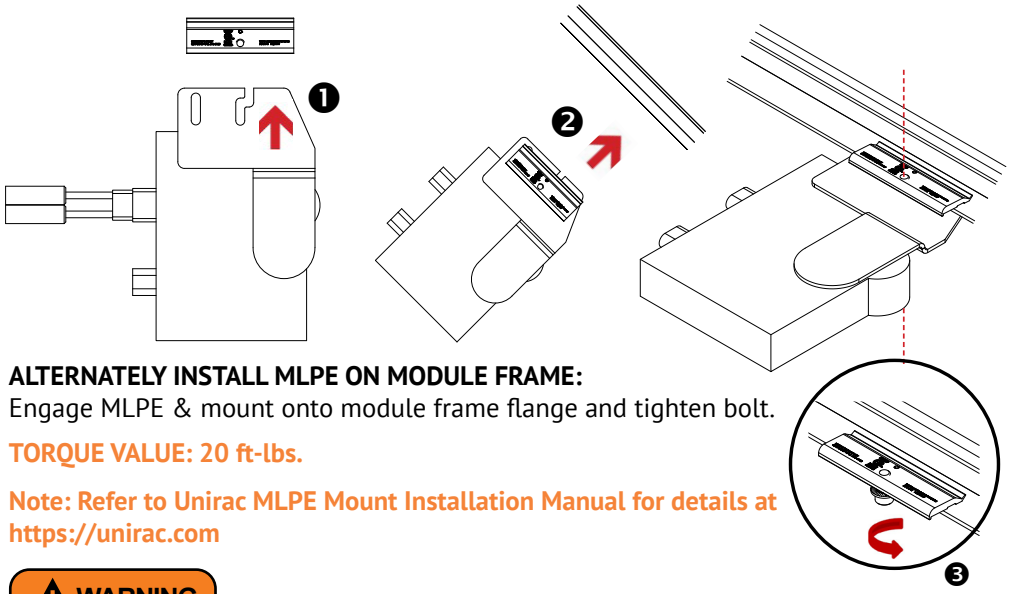

ALTERNATELY INSTALL MLPE ON MODULE FRAME:
Engage MLPE & mount onto module frame flange and tighten bolt.


TORQUE VALUE: 20 ft-lbs.

Note: Refer to Unirac MLPE Mount Installation Manual for details at https://unirac.com

WARNING

MLPE Mount rated for Single Use only


Ensure Copper does contact Aluminum to avoid corrosion.

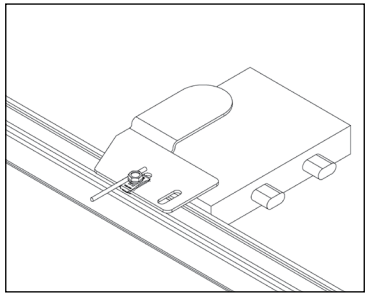

NOTE:
MLPE & Grounding Lug can be used simultaneously to mount MLPE device and grounding wire.


CAUTION

Ensure the copper grounding wire is on top of ground plate and NOT in contact with rail or MLPE mounting plate.

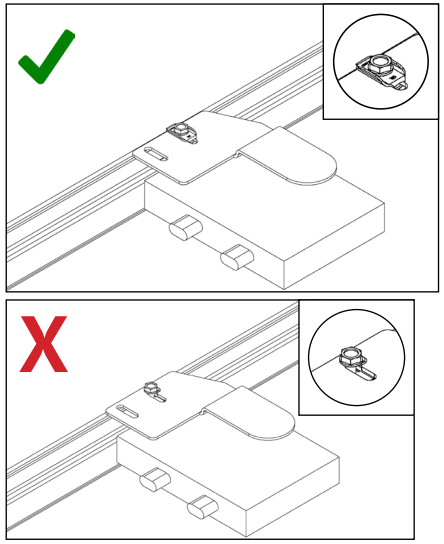


CAUTION

Ensure that grounding plate is always installed on the top of MLPE devices.

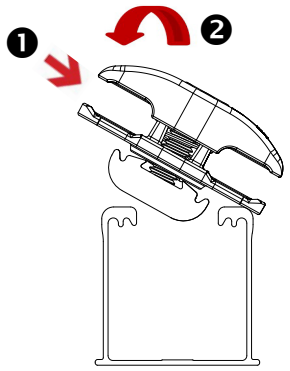


INSTALL NS WIRE MANAGEMENT CLIP:
Insert the wire clamp assembly into the rail by placing one end of the rail nut into the rail and clip in the other end.



INSTALL NS WIRE MANAGEMENT CLIP:
Ensure that the rail nut profile is seated in the rail profile.


Note: Wire clip can be oriented along the rail or perpendicular to secure wires between rails.

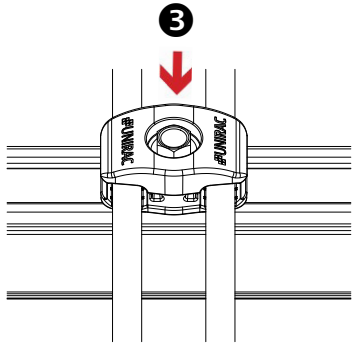


INSTALL NS WIRE MANAGEMENT CLIP:

Insert the wires into the groove of wire clamp and tighten it down to the suggested torque value.


TORQUE VALUE: 3-7 ft-lbs.

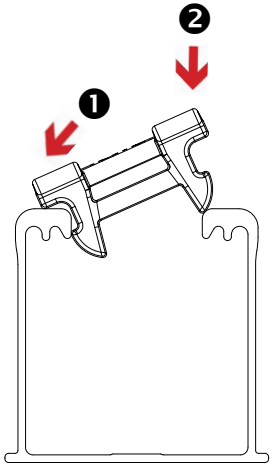


INSTALL WIRE MANAGEMENT CLIP:
Wire clip retains the wire in the rail channel. Press fit the clip onto the rail flanges to install.




INSTALL WIRE MANAGEMENT CLIP:
Ensure that the clip base is seated on the rail flange

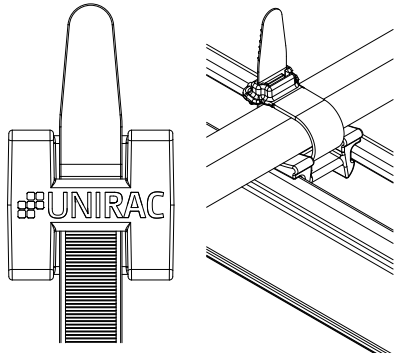


INSTALL WIRE MANAGEMENT CLIP:
Use the wire tie to strap the wires down on the seater provided in the wire clip.

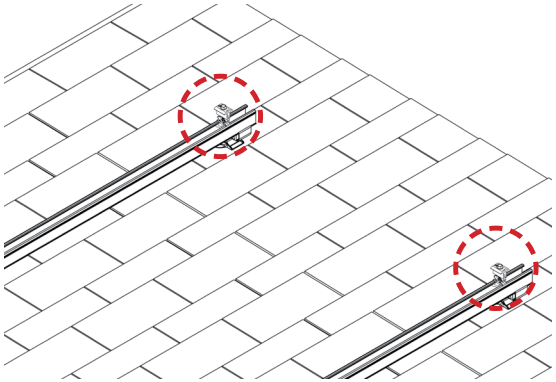

INSTALL COMBO (END) CLAMPS:
Install Combo Clamps starting at the aligned end of rails.

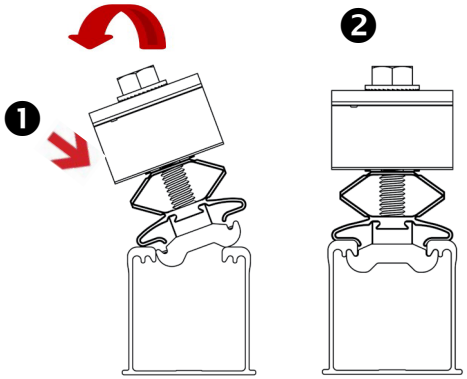


INSERT COMBO CLAMP:
Insert Combo Clamp from one side of the rail nut into the rail and click in the other side. Ensure that the rail nut profile is seated in the rail profile.

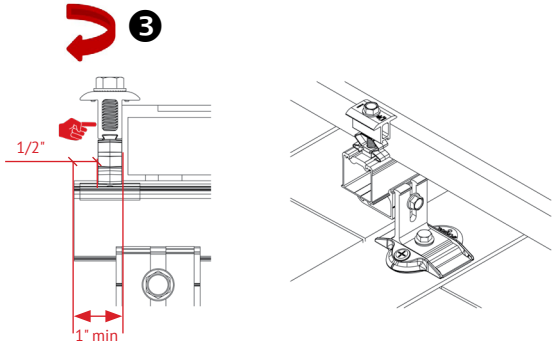

INSTALL END MODULE: Position first module onto rails and engage module frame with end clamps. Hold clamp in place against module while tightening bolt.
TORQUE VALUE: 15 ft-lbs.


Note: Ensure a minimum distance of 1" from the end of the module to end of rail.

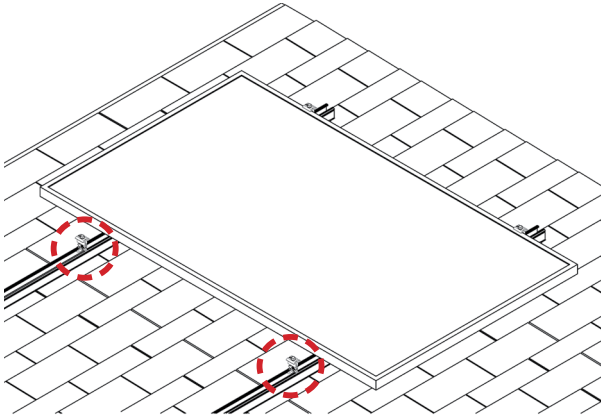

INSTALL COMBO (MID) CLAMPS:
Clamp assemblies may be positioned in rail near point of use prior to module placement.


Note: The clamps may be installed above splice locations.

PRO TIP
Press the clamp assembly slightly into the rail to allow for easy sliding of clamp in the rail.

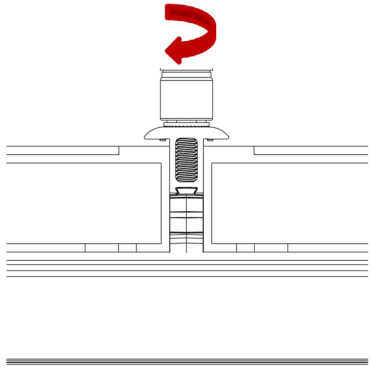


PLACE ADJACENT MODULE AGAINST CLAMPS:
Modules must be tight against clamps with no gaps. Tighten bolt to required torque.

TORQUE VALUE: 15 ft-lbs.

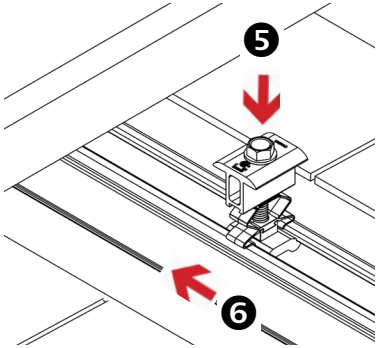


INSTALL REMAINING MODULES:
Proceed with module installation. Engage each clamp with previously positioned module.


Note: Combo clamps are capable of securing module frames whose thickness varies from 30mm to 40mm.

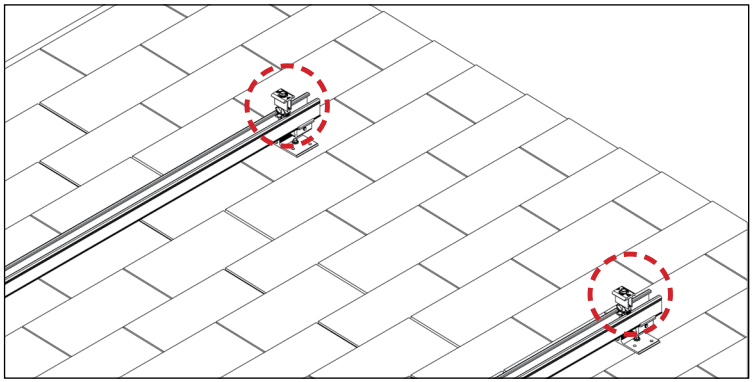

INSTALL US DOMESTIC COMBO (END) CLAMPS:
Install clamps starting at the aligned end of rails.

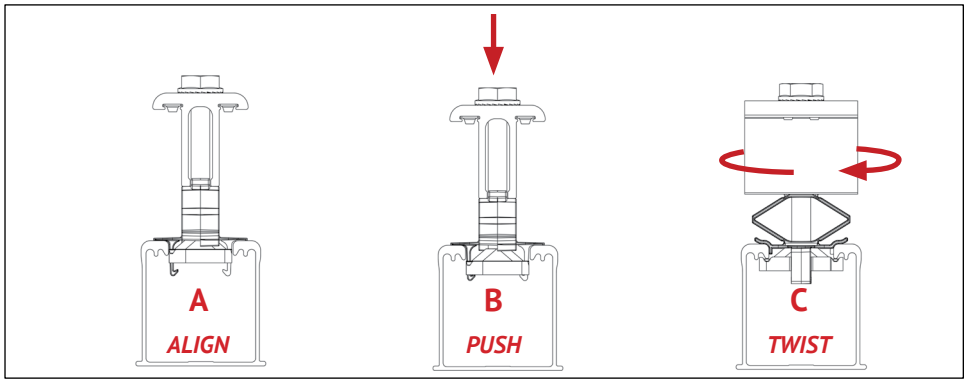


US DOMESTIC COMBO CLAMP INSTALLATION:
A. Position the clamp parallel to the rail.
B. Push the clamp downward into the rail channel.
C. Rotate the clamp clockwise within the rail until the clamp is perpendicular to the rail.

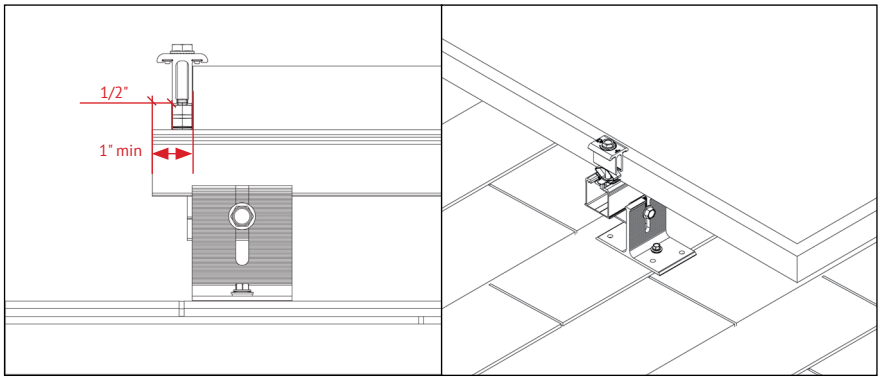

INSTALL END MODULE:
- Position first module onto rails and engage module frame with end clamps.
- Hold clamp in place against module while tightening bolt.


TORQUE VALUE: 12 ft-lbs.

Note: Ensure a minimum distance of 1" from the end of the module to end of rail.

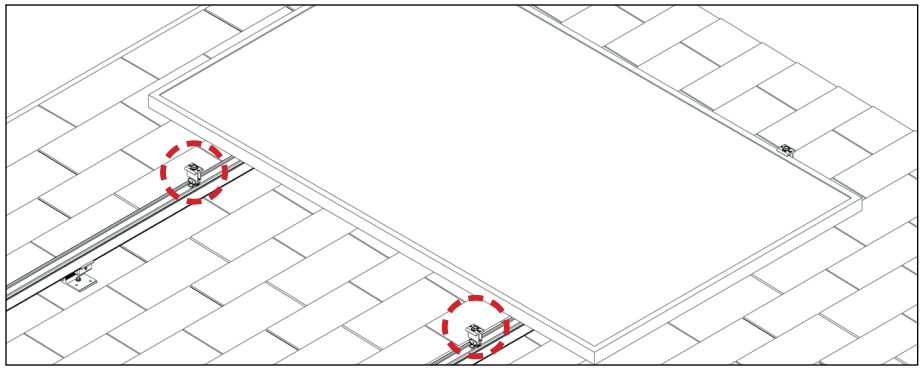


INSTALL US DOMESTIC COMBO (MID) CLAMPS:
Clamp assemblies may be positioned in rail near point of use prior to module placement.

Note: The clamps may be installed above splice locations.

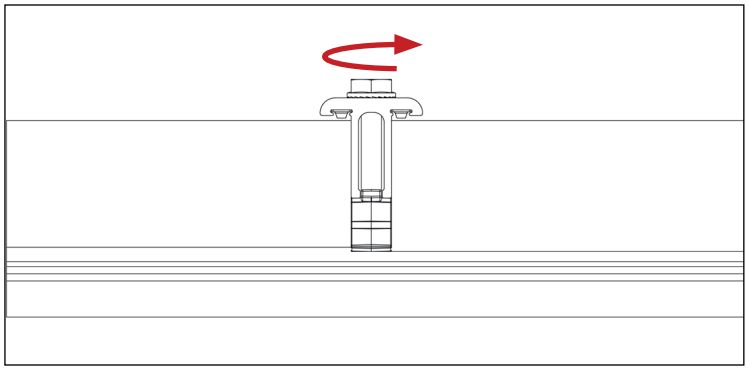


PLACE ADJACENT MODULE AGAINST CLAMPS:
- Modules must be tight against clamps with no gaps.
- Tighten bolt to required torque.

TORQUE VALUE: 12 ft-lbs.

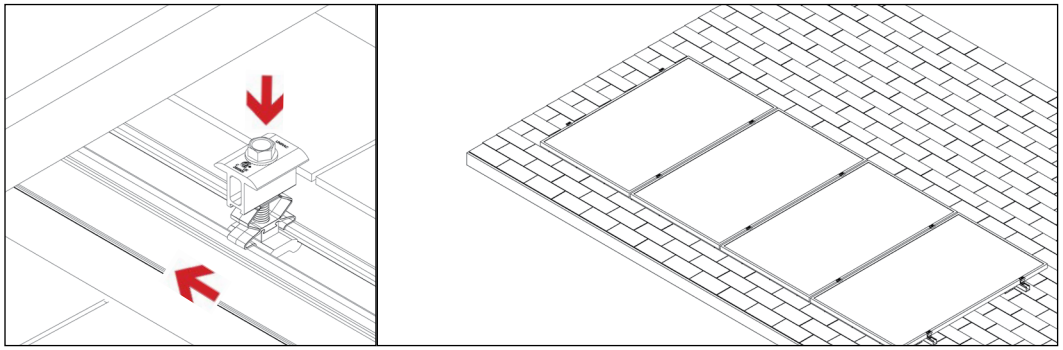


INSTALL REMAINING MODULES:
Proceed with module installation. Engage each clamp with previously positioned module.


Note: US Domestic Combo clamps are capable of securing module frames whose thickness varies from 30mm to 40mm.

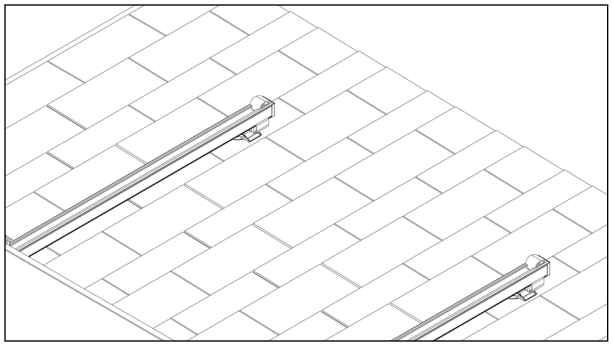


INSTALL MODULE END CLAMPS: The End clamp is supplied as kit with pre assembled end cap. The clamp should be installed on the rails prior to installing end modules.

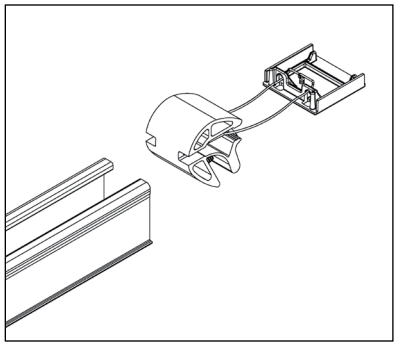


INSTALL END CLAMPS ON RAIL: Slide the end clamp assembly on to the rail by engaging grooves on both sides into the top flange of the rail.

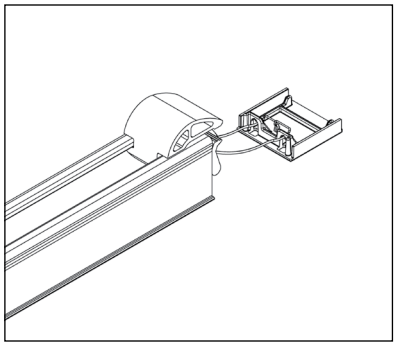



POSITION END CLAMPS: Slide the end clamp assembly onto the rail until the module return flange is cleared for placing the module

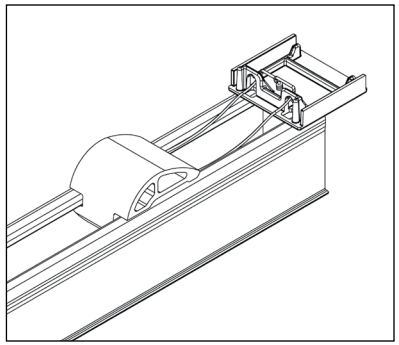

NOTE:
To assist insertion of the clamp into the rail, hold the twist ties together and slide the clamp. Place the end cap on the rail flange for smooth gliding of the clamp to the required position.

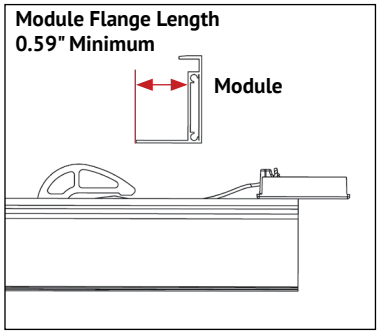

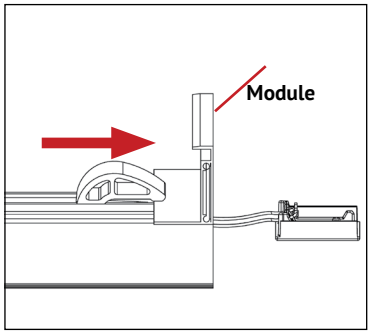


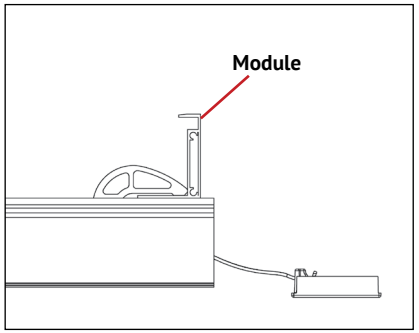

INSTALL FIRST MODULE:
Position first module onto rails with the clamp clear from the return flange of the module. Hold the end cap and drag the clamp onto the return flange of the module. Once the clamp is onto the return flange, drag the clamp till the edge of the clamp contacts the vertical wall of return flange.

Note:

- **Ensure to use a drill extension or deep socket for installing the clamp bolt.**
- **Requires a minimum return flange length of 0.59" and thickness of 1-2 mm for Hidden Endclamp to secure the module.**
- **Installation method for the Hidden end clamp and end cap on the HD rail is similar to standard rail.**

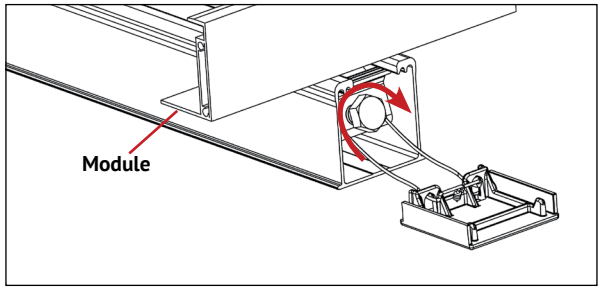


ENGAGE CLAMP: While holding the module in position and with the clamp in contact with the flange, tighten the end clamp bolt to the required torque.


Torque End Clamp bolt to 15 ft-lbs, No anti-seize

⚠ CAUTION


Ensure bolt is not over-torqued, use low torque setting on drill. If using an impact driver, stop rotation as soon as impact action of driver begins.

FOR HIDDEN CLAMP

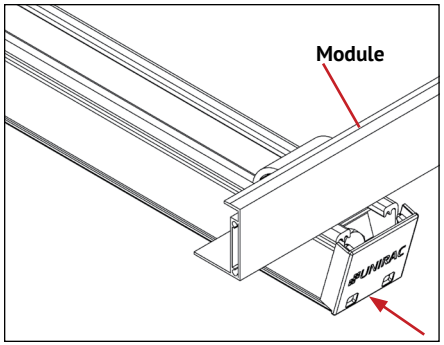

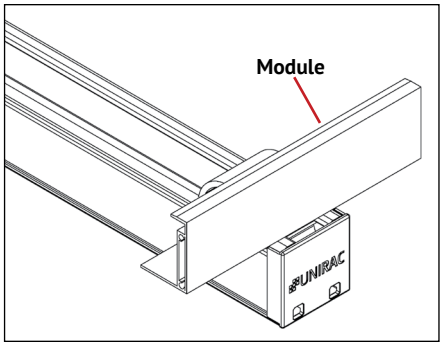

END CAP INSTALLATION:
To install the end cap, tuck in the twist tie in the rail beside the bolt. Position the cap on the edge of the rail and press the cap onto the rail.

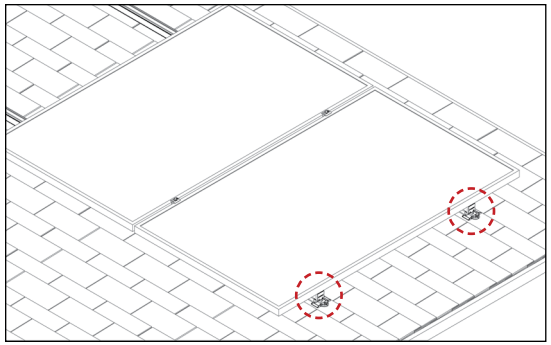


Place module, flush with rail ends. The bolt head of the clamp must not protrude beyond the rail edge. Modules must be fully supported by rails and cannot overhang at the ends of rails.


Pro Tip:
For best appearance, leave enough space for the bolt head while cutting the rail ends to perfectly snap fit the end cap.

⚠ CAUTION

Ensure the clamp bolt head does not protrude outside of the rail while cutting the rails for end cap installation.

FOR COMBO CLAMP

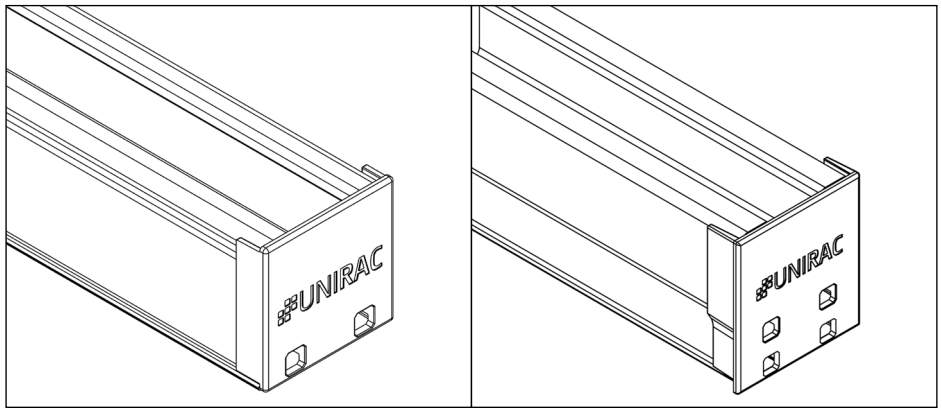

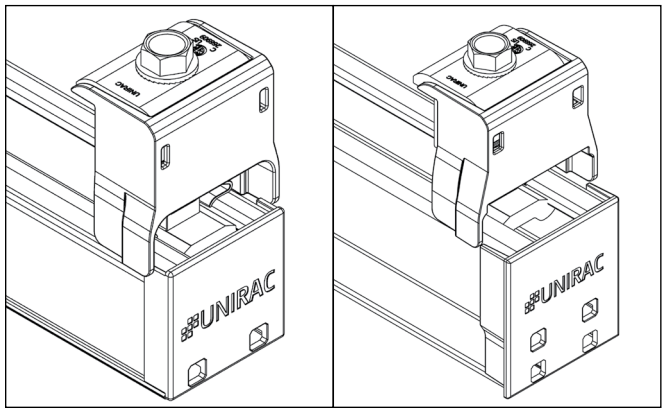


OPTIONAL END CAP:
To install the end cap, place the cap on the edge of the rail and press the cap onto the rail.


OPTIONAL COMBO CLAMP CAP:
To install the combo clamp cap, place the cap on the edge of the rail and press the cap onto the clamp.

NOTE:
- **Cap kits ENDCAPD1 and NUHDCAPKIT are ONLY compatible with CCLAMPM1, CCLAMPD1, and CCLAMPD1-US**
- **Cap kits NUENDCAPKIT and NUHDENCCAPKIT are compatible with all NXT Combo clamps**


S-5! PRE ASSEMBLED METAL ROOF ATTACHMENTS

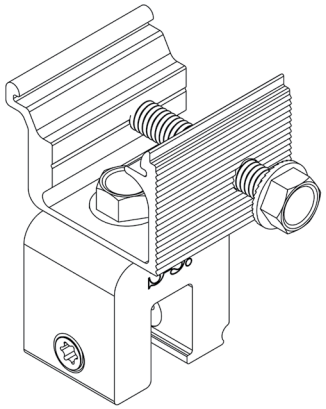


NXT S-5-V MINI ASSEMBLY

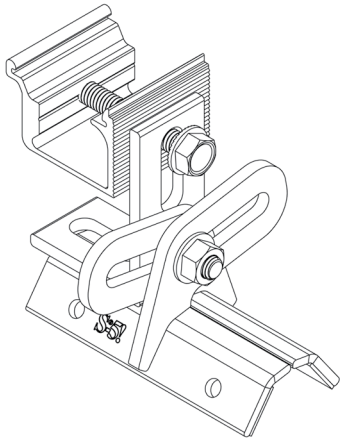

NXT S-5! PROTEA BRACKET ASSEMBLY

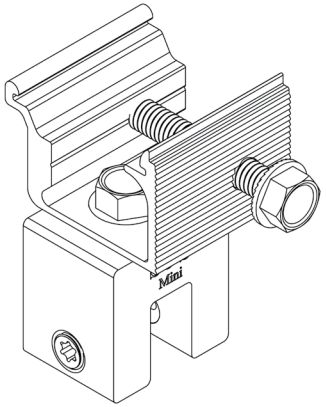


NXT S-5-S MINI ASSEMBLY

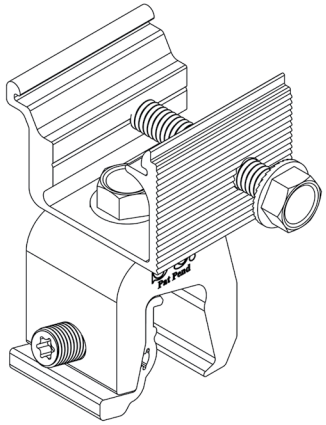

NXT S-5-N MINI ASSEMBLY


S-5! PRE ASSEMBLED PROTEA BRACKET

- The S-5! Protea Bracket is designed for use with trapezoidal (R-panel) metal roof profiles.
- The bracket mounts directly on top of the roof rib and incorporates an EPDM pad to provide a weather-resistant seal.
- It is secured directly to the roof sheeting using stainless steel cap screws.

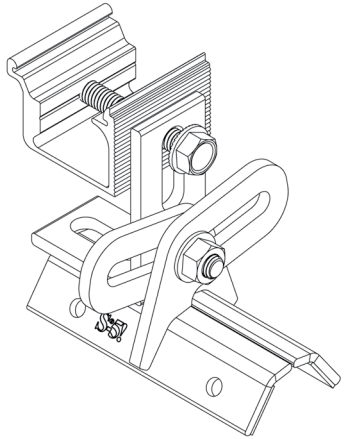


NXT S-5! PROTEA BRACKET ASSEMBLY (P/N: NUS5PROBKT-US)


Compatible Roof Profile

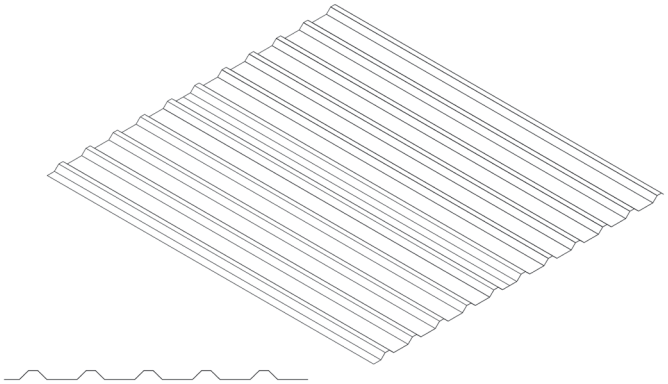

Trapezoidal (R-Panel) Metal Roof

S-5! PRE ASSEMBLED PROTEA BRACKET INSTALLATION

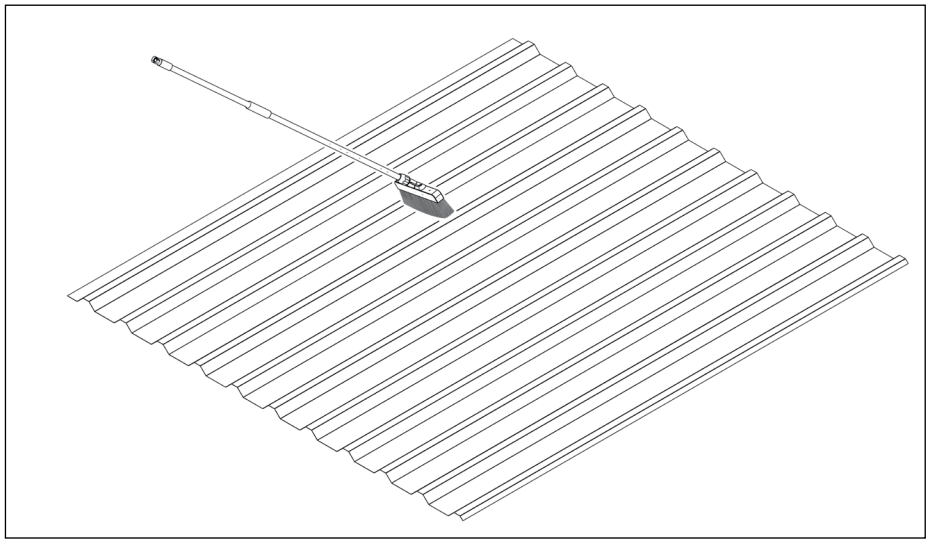

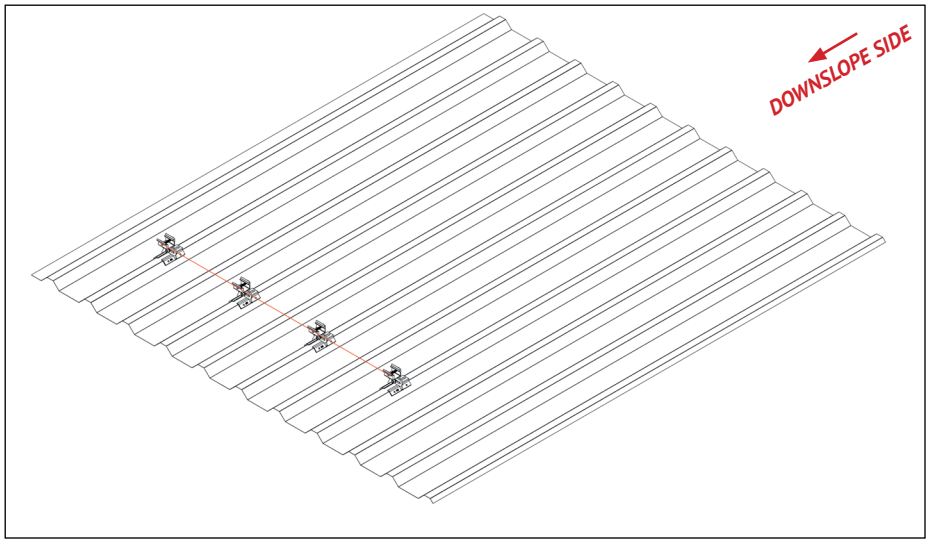


STEP 1: PREPARE THE ROOF SURFACE


- Clean the panel surface by removing any oil, dirt, or debris. Determine the installation locations for the Protea Brackets.

STEP 2: ESTABLISH THE BRACKET LAYOUT

- Install one Protea Bracket at each end of the roof, ensuring both are positioned at the same measured distance from the roof edge.
- Stretch a string line between the two brackets and use it as a guide to align the remaining brackets.
- For upslope bracket spacing recommendations, refer to the S-5! website.


S-5! PRE ASSEMBLED PROTEA BRACKET INSTALLATION

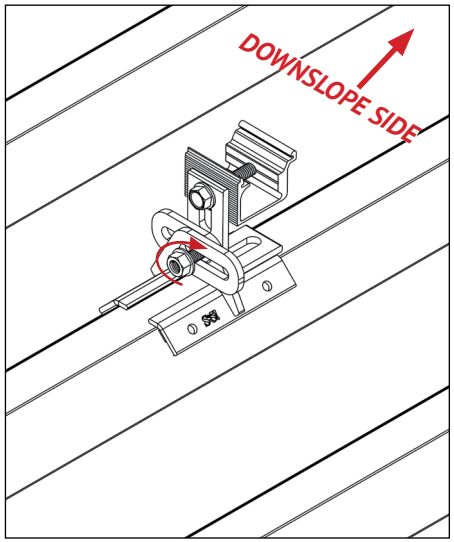

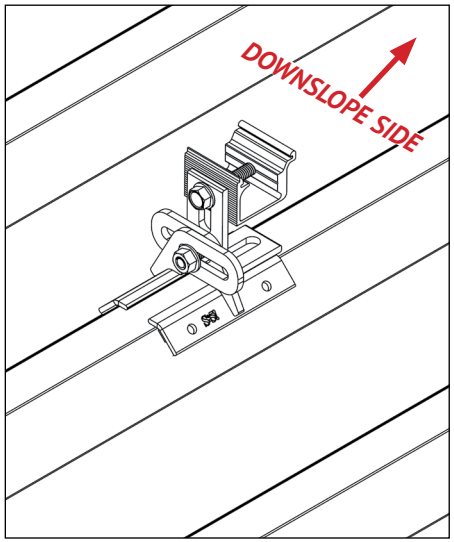

STEP 3: POSITION THE PROTEA BRACKET

- Place the Protea Bracket on the roof panel rib and hand-tighten the hinge bolt to fit the roof profile.
- Since the Protea Bracket is reversible, ensure all brackets in the same row are installed with the integrated L-foot in the same orientation.

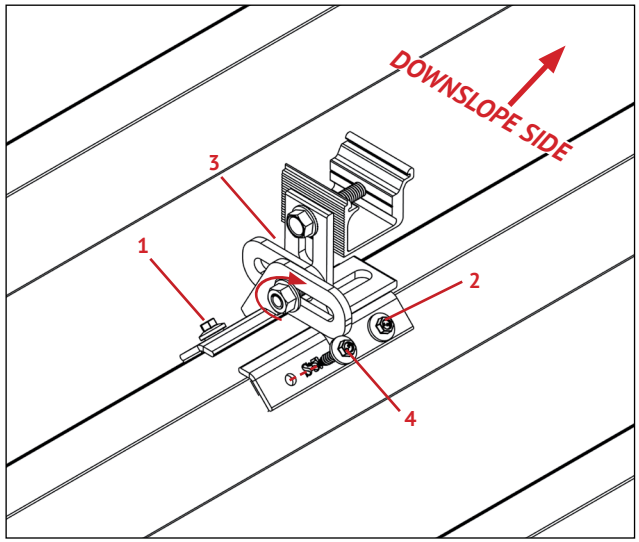

STEP 4: SECURE THE PROTEA BRACKET

- Secure the Protea Bracket to the roof rib using the supplied screws.
- Install the screws in the alternating pre-punched hole pattern shown in above Figure.
- Use all four holes to achieve the tested holding strength.
- Once Protea Bracket is secured to roof, hold the integrated L-foot firmly in position and tighten the hinge bolt to the specified torque using an open-end socket wrench.

Torque Value: 15 ft-lbs.


⚠ CAUTION


- **Do not overtighten the screws. A slight extrusion of the EPDM washer around the screw head indicates proper compression.**
- **If a screw strips during installation, remove it and replace it with a waterproof bulb rivet.**


NOTE:

- **To minimize the risk of stripping, use a screw gun equipped with a depth-sensing nosepiece or adjustable torque clutch.**
- **Do not apply additional sealant.**

S-5! PRE ASSEMBLED PROTEA BRACKET INSTALLATION

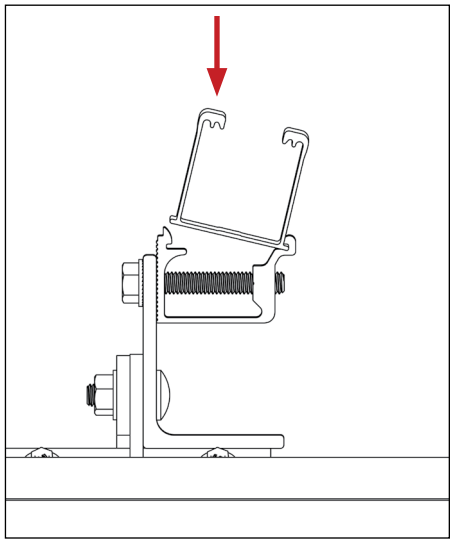

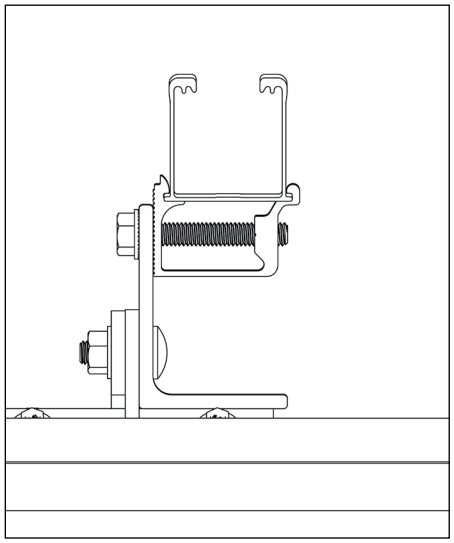

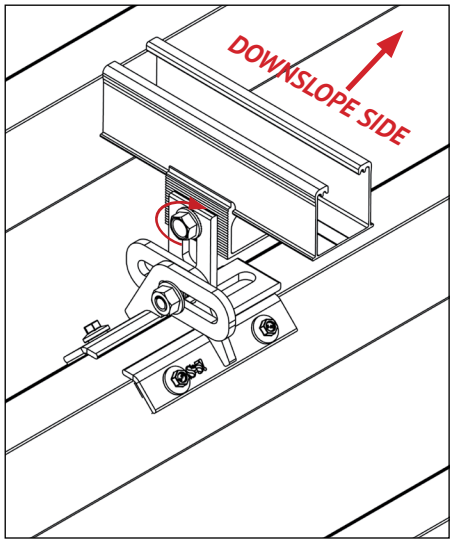


STEP 5: SECURE NXT RAIL TO PROTEA BRACKET ASSEMBLY

- Position NXT rail in rail clamp
  - Insert the rail flange on one side of the clamp groove.
  - Then click-in the other side of the rail into the clamp groove.
- Tighten NXT Metal Roof Rail Clamp rail bolt to secure NXT Rail and Rail clamp.


Torque Value: 15 ft-lbs.

S-5! PRE ASSEMBLED STANDING SEAM BRACKETS INSTALLATION

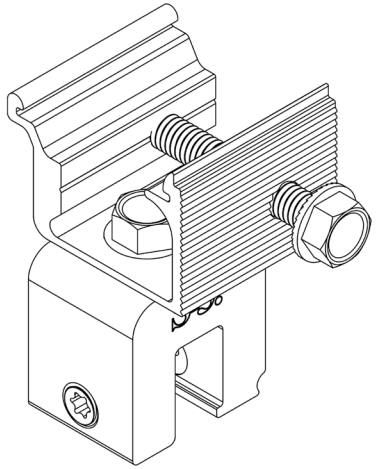


NXT S-5-V MINI ASSEMBLY

Compatible with most machine-folded standing seam profiles in vertical orientation or specific compatible seam dimensions

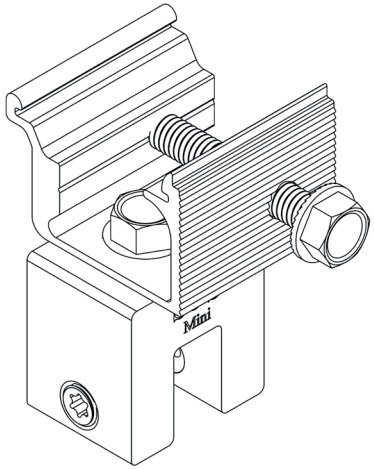

NXT S-5-S MINI ASSEMBLY


Compatible with vertical snap-together standing seam profiles and the traditional single-fold (angle-seam) profiles or similar seam types

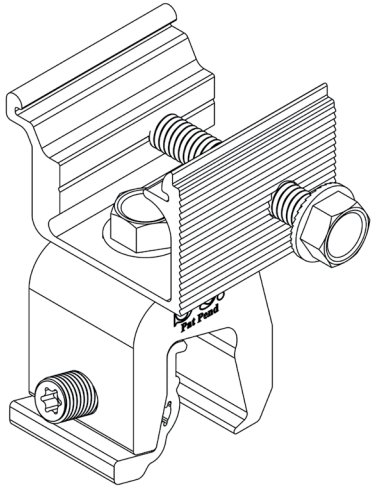

NXT S-5-N MINI ASSEMBLY

Compatible for 1" (25 mm) Nail-Flange metal roof profiles

Compatible Roof Profiles




Double Fold




Trap Double Fold




Trap Snap Seam



Single Fold




Snap Seam




Snap Lock



Batten Cap





Trap Single Fold





Nail Strip

S-5! PRE ASSEMBLED STANDING SEAM BRACKETS INSTALLATION

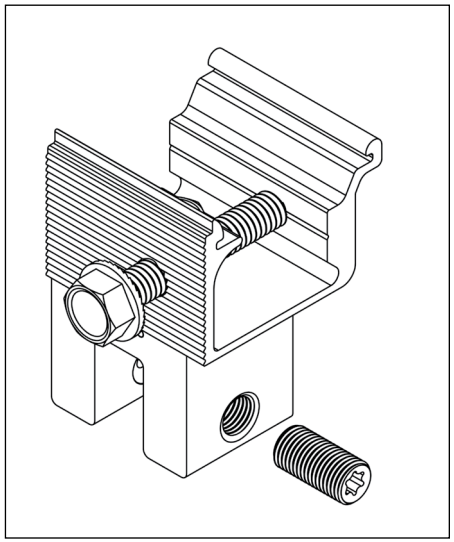

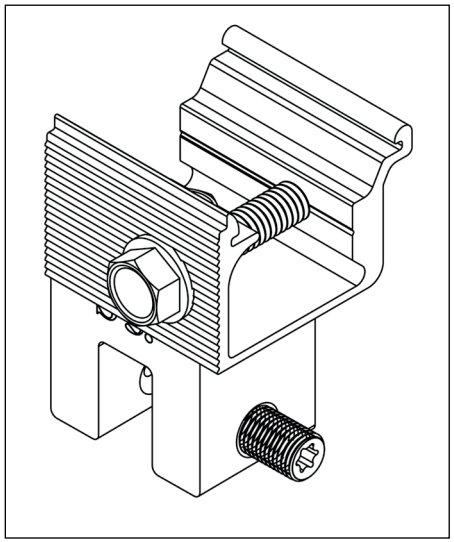

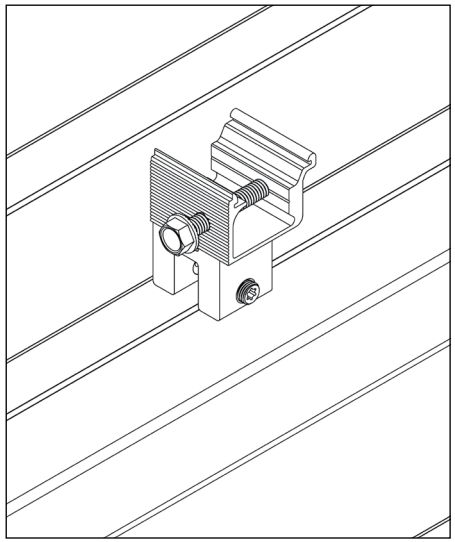

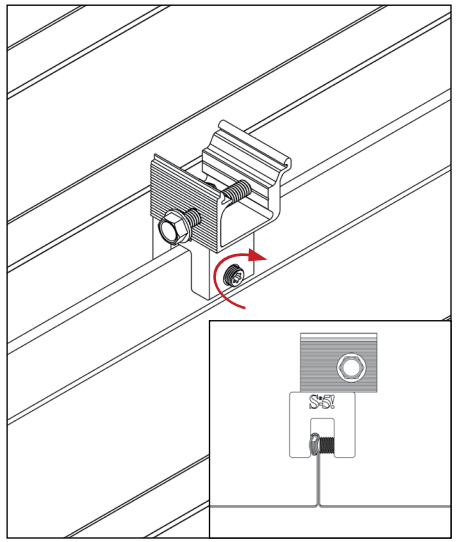


STEP 1: PREPARE THE STANDING SEAM BRACKETS


- Partially thread the set screw into the Standing Seam Bracket by hand.

STEP 2: POSITION THE STANDING SEAM BRACKETS

- Place the Standing Seam Bracket on the standing seam in the correct orientation.
- For machine-folded seams, install the Standing Seam Bracket with the set screw positioned opposite the seam fold, as shown in above illustration .
- For many snap-together seam profiles, position the set-screw on the open (or overlap) side of the seam.
- For some seam profiles, clamp orientation is not critical.

S-5! PRE ASSEMBLED STANDING SEAM BRACKETS INSTALLATION

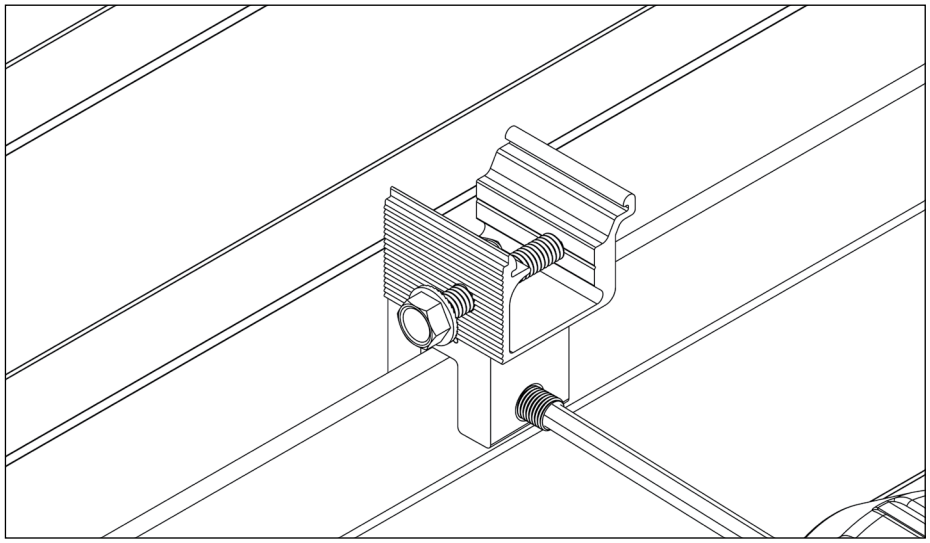

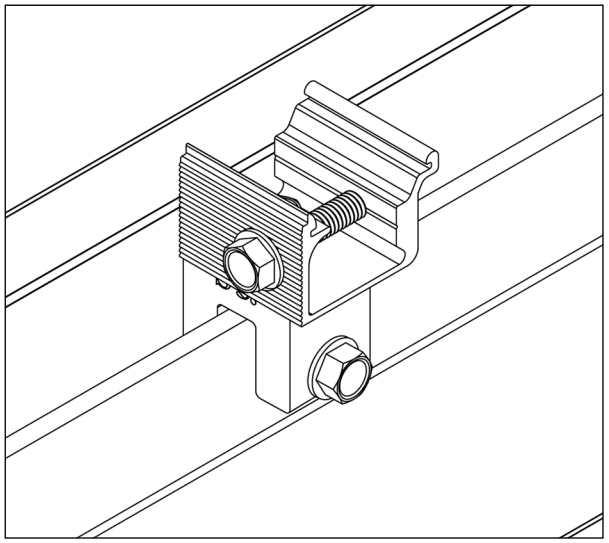

STEP 3: TIGHTEN THE SET-SCREW

- Using the supplied screw gun bit, tighten the set-screw with a screw gun until the specified torque is achieved.
- The set-screw will dimple the seam material but will not penetrate it.
- Verify the installation torque periodically using a calibrated torque wrench to ensure the required torque is consistently achieved.
- When installed correctly, the clamp requires no routine maintenance or reinspection for the service life of the roof.

Torque Value:

- **For 22 ga steel - 13 to 15 ft-lbs**
- **For all other metals and thinner steel gauges - 11 to 12.5 ft-lbs**


IMPORTANT

For NXT S-5-V Mini Assembly and NXT S-5-N Mini Assembly installed on vertical double-fold seams: Lift the clamp as needed to fully engage the clamp lip beneath the seam while allowing the setscrew(s) to fully engage the seam fold. This helps the clamp seat in the correct vertical position.


STEP 4: TIGHTEN THE FLANGE BOLT (IF REQUIRED)


- For critical attachment applications using an M8-1.25 × 16 mm hex flange bolt (sold separately)


Torque Value: 13 ft-lbs.



S-5! PRE ASSEMBLED STANDING SEAM BRACKETS INSTALLATION

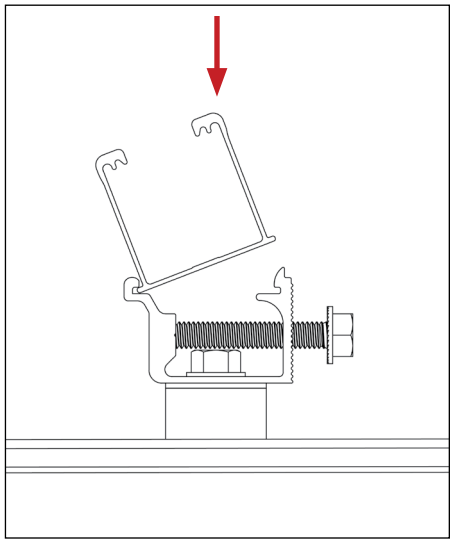

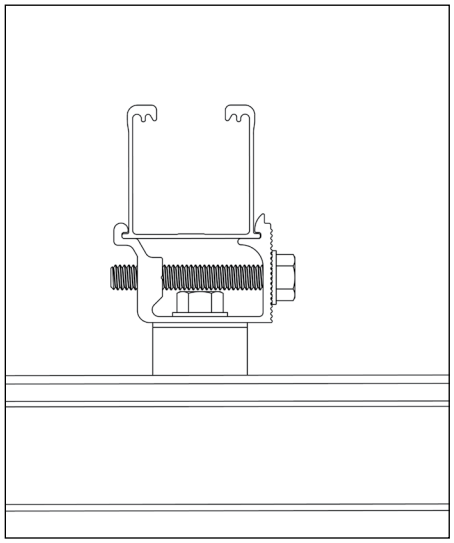

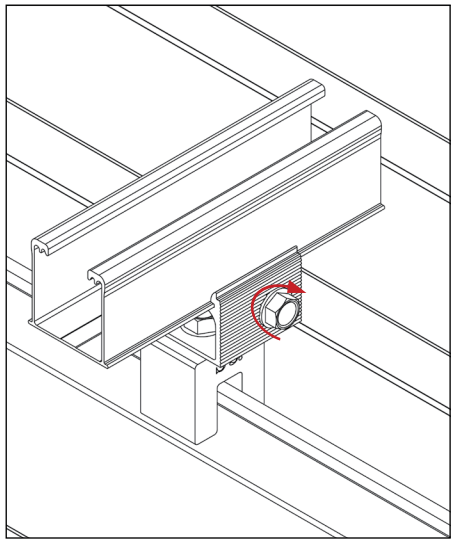


STEP 5: SECURE NXT RAIL TO STANDING SEAM BRACKET ASSEMBLY


- Position NXT rail in rail clamp
  - Insert the rail flange on one side of the clamp groove.
  - Then click-in the other side of the rail into the clamp groove.
- Tighten NXT Metal Roof Rail Clamp (MRRC) bolt to secure NXT Rail and Rail clamp.

Torque Value: 15 ft-lbs.


S-5! COMPONENTS




S-5-B




S-5-B Mini




S-5-E




S-5-E Mini




S-5-H




S-5-H mini




S-5-H90




S-5-H90 Mini




S-5-N




S-5-N Mini




S-5-Q




S-5-Q Mini



S-5-S




S-5-S Mini




S-5-T


S-5! COMPONENTS




S-5-T mini




S-5-U




S-5-U Mini




S-5-V




S-5-V Mini



S-5-Z



S-5-Z mini



Protea Bracket

NXT METAL ROOF RAIL CLAMP INSTALLATION

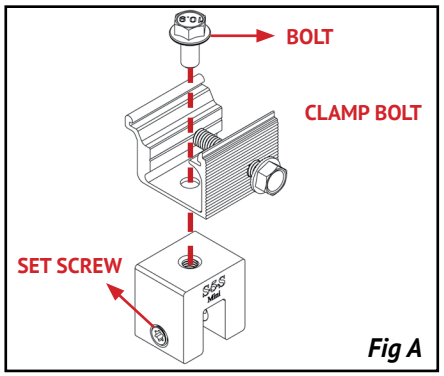


Fig A

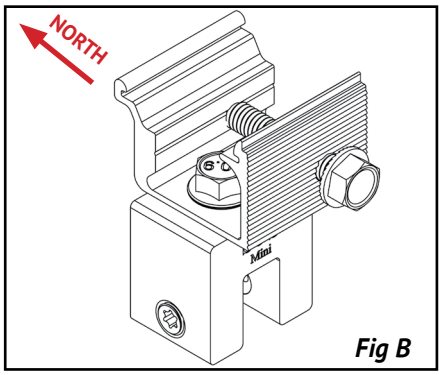


Fig B


STEP 1: ASSEMBLE RAIL CLAMP AND ATTACHMENT


- Position the NXT metal roof rail clamp on the selected attachment to align holes as shown in Fig A
- Secure NXT metal roof rail clamp and attachment with the appropriate hardware required for the selected attachment
- Follow the torque specifications provided by attachment manufacturers.

PRO TIP: Assembling the roof attachments and NXT metal roof rail clamps is more convenient and efficient when performed on the ground than on the roof.

⚠ CAUTION

- **After tightening the bolt, visually check that the rail clamp and roof attachment are flush and parallel.**
- **Ensure the bolt is positioned in between the rail clamp bolt and the roof attachment set screw.**

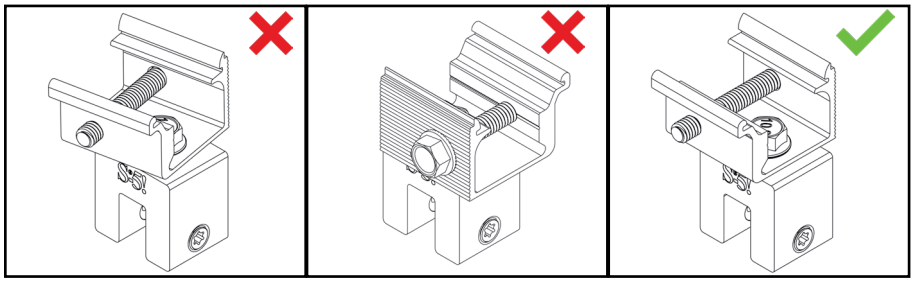

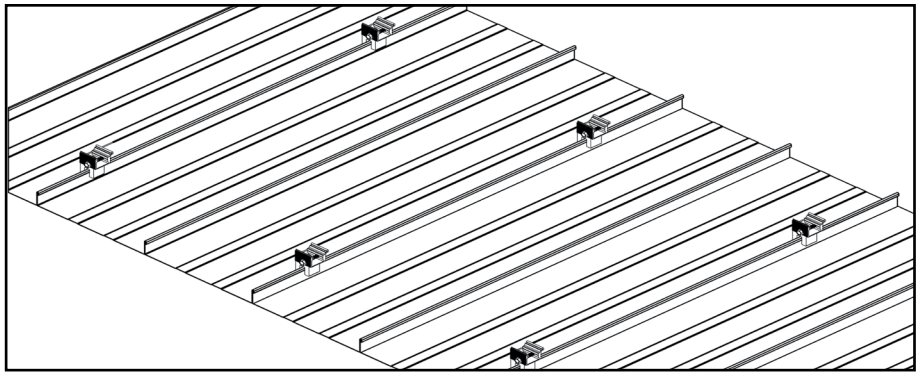


STEP 2: INSTALL ROOF ATTACHMENTS

Follow the instructions provided by the roof attachment manufacturer to secure the attachments to the metal roof.

NOTE:

- **In STEP 1, if you are installing the following preassembled kits, ensure that the bolt is torqued to 13 ft-lbs.**
- **KITS: NUS5S-MI-US, NUS5N-MI-US, NUS5V-MI-US, NUS5PROBKT-US**

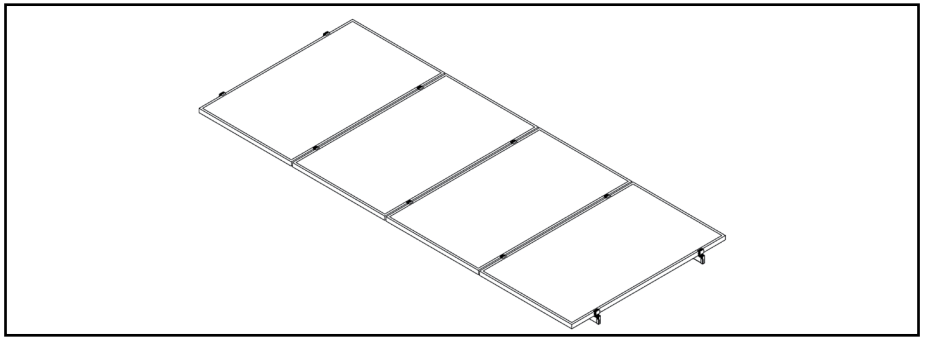



STEP 3: FINISH SYSTEM INSTALLATION

Finish NXT UMOUNT installation by following instructions provided in this manual from ***Page 23*** to ***Page 33.*** Ensure the system is properly grounded and bonded as per Bonding Connections & Grounding Paths section on ***Pages 31-52.***

S-5! STANDING SEAM CLAMPS AND PROTEA BRACKET INSTALLATION


STEP 1: Follow the instructions provided on ***https://buys-5.com/*** for installing the S-5! standing seam clamps and Protea bracket to the metal roof.

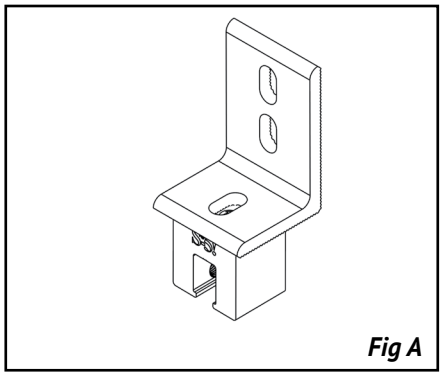

Fig A

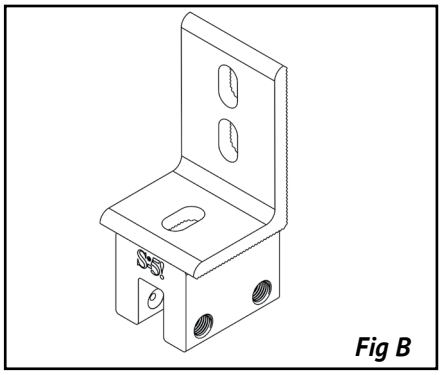
Fig B

STEP 2: POSITION L-FOOT

Position L-foot on selected attachment clamp to align holes as shown in Fig A and Fig B.

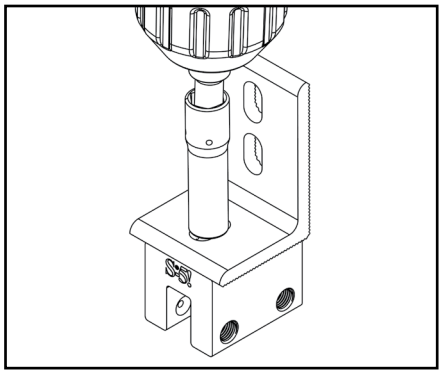

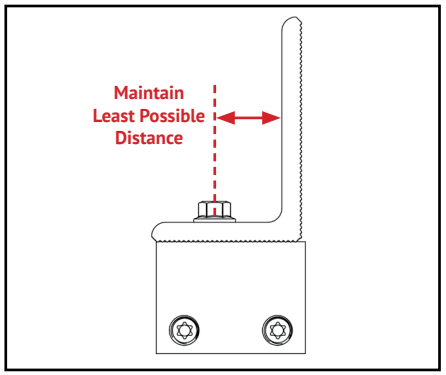



STEP 3: SECURE L-FOOT

Use appropriate hardware required for the selected attachment to secure the L-Foot to the clamp.

Torque bolt to 13 ft-lbs


NOTE: It is recommended to maintain least possible distance between the upright leg of the L-foot and the bolt center.

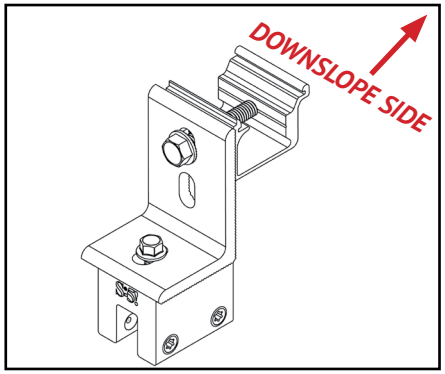

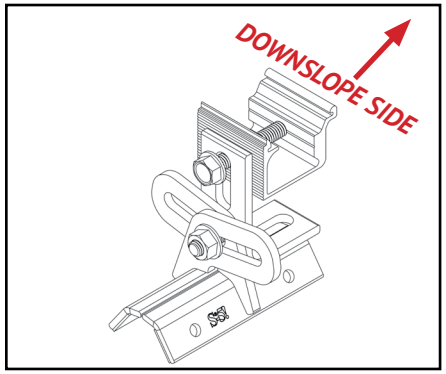


STEP 4: SECURE RAIL CLAMP TO L-FOOT OR PROTEA BRACKET


Follow the steps mentioned on ***Page 20*** to secure Rail to L-Foot or Protea Bracket

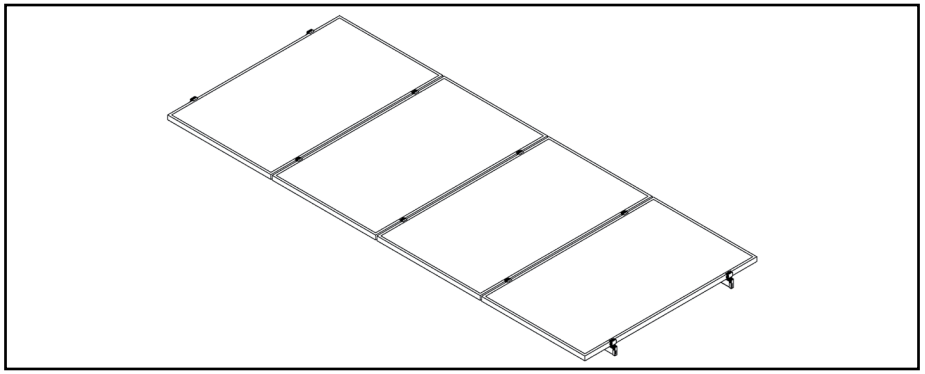

STEP 5: FINISH SYSTEM INSTALLATION


Finish NXT UMOUNT installation by following instructions provided in this manual from ***Page 23*** to ***Page 33.*** Ensure the system is properly grounded and bonded as per Bonding Connections & Grounding Paths section on ***Pages 31-52.***

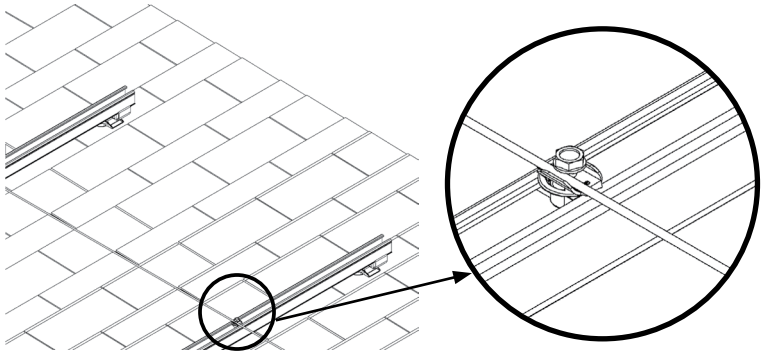

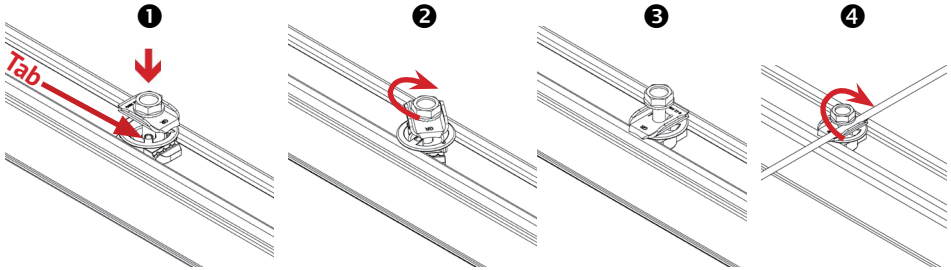

SYSTEM GROUNDING: Rails can be bonded using a MLPE & GROUNDING LUG (NULGMLP1), GROUND WEEBLUG #1 or ILSCO LAY IN LUG (GBL4DBT). At least one rail per row of modules in an array must be bonded to electrical ground. Each additional row of modules must be grounded with at least one rail lug per row or with a row-to-row bonding devise listed here.

Note: See Page 9 for additional lugs required for expansion joints.

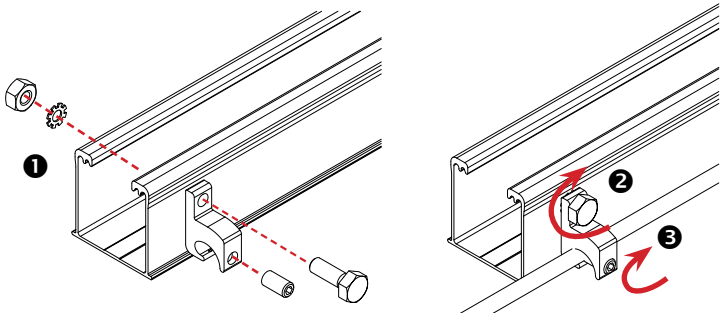

ALTERNATE SYSTEM GROUNDING WITH ILSCO LAY-IN LUG - UNIRAC P/N 008009P: Alternate Grounding Lug. Drill hole in rail 7/32" in diameter, deburr hole and bolt through one wall of rail.


BOLT TORQUE VALUE: 5 ft lbs.
TERMINAL TORQUE: 4-6 AWG: 35in-lbs, 8 AWG: 25 in-lbs.

⚠ WARNING

Ensure Copper does contact Aluminum to avoid corrosion.


SYSTEM GROUNDING WITH MLPE & GROUNDING LUG: Insert the T-nut in the rail by holding the plastic cone's tabs with thumb and middle finger. Rotate the clamp 90 deg in clockwise direction in the rail and release when aligned with rail. Ensure that the T-nut is engaged in the rail profile. Place the grounding wire on top of the grounding plate on one of the side of the bolt, parallel to the grounding plate flanges. Ensure copper is not in contact with rail or MLPE plate surfaces. For stranded wire, Unriac recommends looping the wire around the bolt and leaving some insulation on the end of the wire to keep strands together. Tighten bolt to recommended torque.

TORQUE VALUE: 6-12 AWG SOLID COPPER: 10 ft lbs.
6-10 AWG STRANDED COPPER: 10 ft lbs
NOTE: MLPE & GROUNDING LUG is single use only

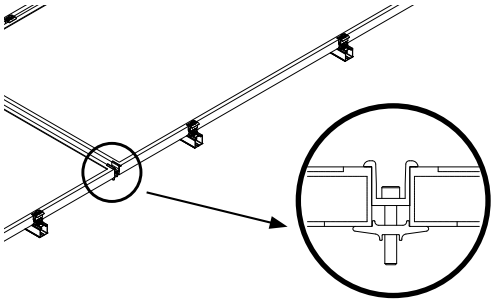


ALTERNATE ROW GROUNDING WITH N/S BONDING CLAMP:
Insert clamp between module rows and tighten bolt.

TORQUE VALUE: 20 ft-lbs.

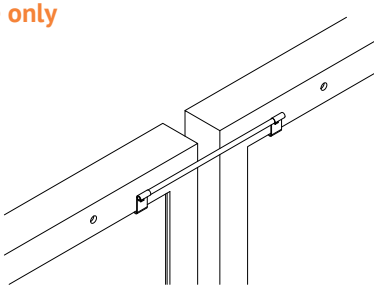

ALTERNATE ROW GROUNDING WITH N/S BONDING CLIP:
Fully seat bonding clip on each module flange to provide bond across N/S module gap.

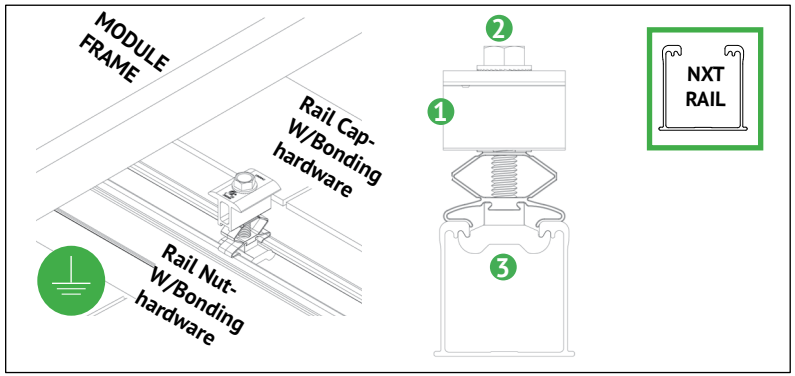

BONDING COMBO MID-END CLAMP ASSEMBLY


1. Aluminum combo mid-end clamp cap with stainless steel bonding pins that pierce module frame anodization to bond module and clamp
2. Stainless steel bolt bonds aluminum clamp to stainless steel Hex bolt
3. Aluminum combo mid-end clamp rail nut with stainless steel bonding pins that pierce rail anodization to bond rail and clamp


NOTE: See Page 29 for installation details.

BONDING DOMESTIC COMBO MID-END CLAMP ASSEMBLY

1. Aluminum combo mid-end clamp cap with stainless steel bonding cones that pierce module frame anodization to bond module and clamp
2. Stainless steel bolt bonds aluminum clamp to stainless steel Hex bolt
3. Stainless steel combo mid-end clamp rail nut with bonding serrations that pierce rail anodization to bond rail and clamp

NOTE: See Page 30 for installation details.

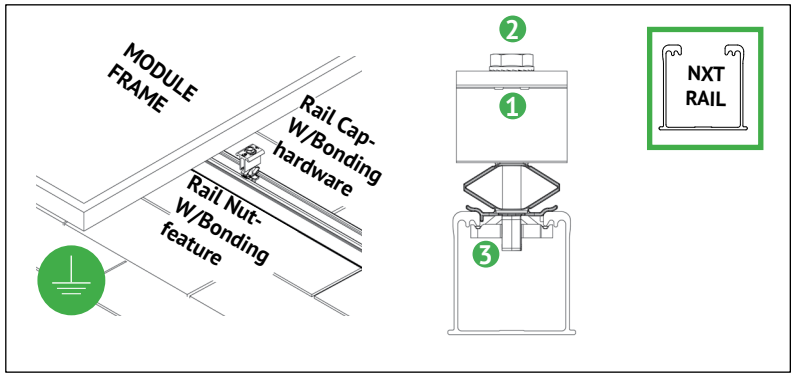


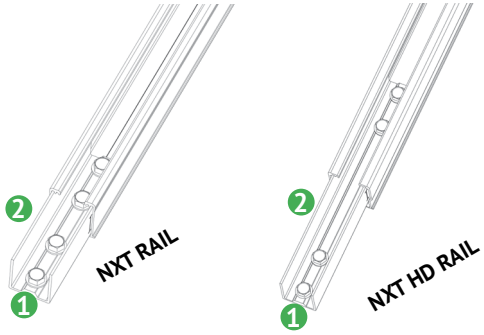

BONDING RAIL SPLICE

1. Bonding Hardware creates bond between Splice bar and each rail section.
2. Aluminum splice bar spans across rail gap to create rail to rail bond. Rail on at least one side of splice will be grounded.


NOTE:
- **See Page 24 for installation details**
- **Splice certified for single-use only**

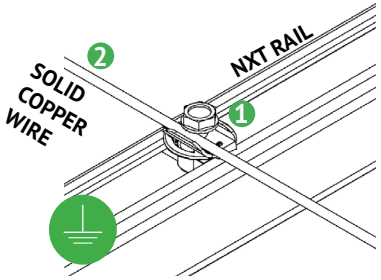

RACK SYSTEM GROUNDING

1. Tabs on the grounding plate pierce anodization on the rail to bond rail to ground wire.
2. Solid copper wire connected to lug is routed to provide final system ground connection.


NOTE: See Page 47 for installation details and alternate racking system grounding methods.

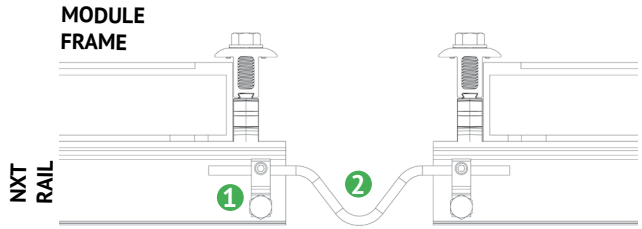

BONDING BETWEEN THERMAL BREAKS

1. Lug is connected at the end of each thermal break to the rail.
2. Solid copper wire is connected across the gap to bond the two ends.


NOTE: See Page 9 for installation details.

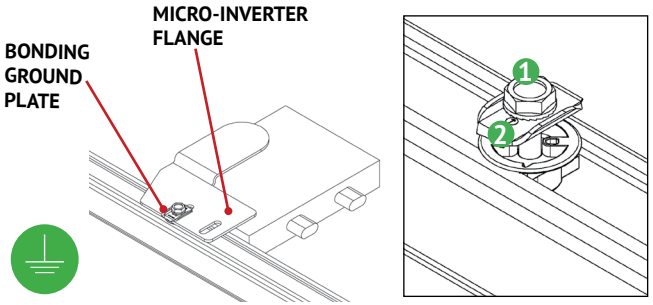

BONDING MICROINVERTER MOUNT

1. Serrations on the bolt head remove the anodization of MLPE flange and bonds.
2. Tabs on the stainless steel ground plate remove anodization on the rail and bonds.

NOTE: See Page 27 for installation details

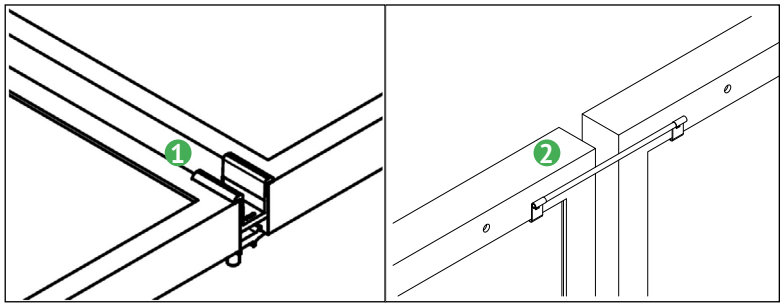


ALTERNATE ROW-TO-ROW BONDING PATHS


1. Row-to-row module bonding is accomplished with bonding clamp with 2 integral bonding pins.
2. Alternate method by connecting clips on either module to complete the bonding path.


NOTE:
- **See Page 47 for installation details**
- **Row-to-row module bonding certified for single-use only**

⚠ CAUTION

- **If loose components or loose fasteners are found during periodic inspection, re-tighten immediately.**
- **Any components showing signs of corrosion or damage that compromise safety shall be replaced immediately.**

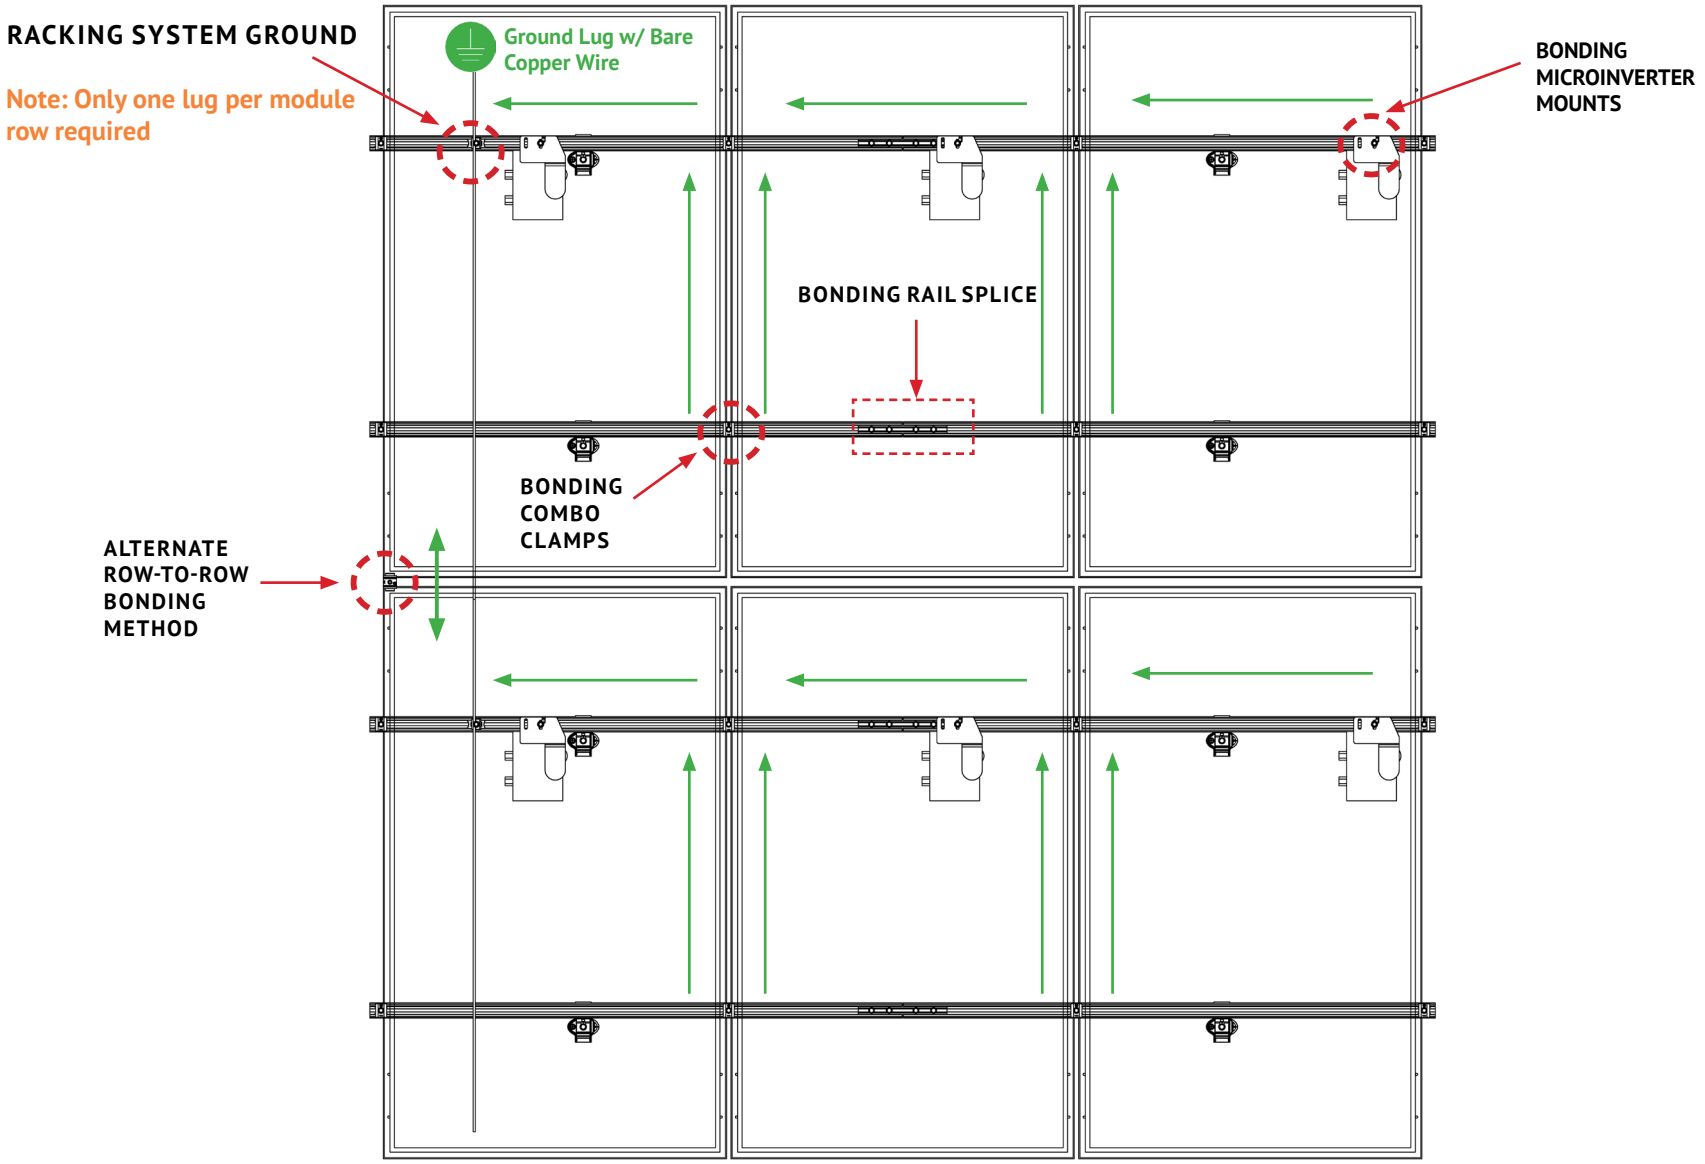
RACKING SYSTEM GROUND
Note: Only one lug per module row required
Ground Lug w/ Bare Copper Wire
BONDING MICROINVERTER MOUNTS
BONDING RAIL SPLICE
BONDING COMBO CLAMPS
ALTERNATE ROW-TO-ROW BONDING METHOD

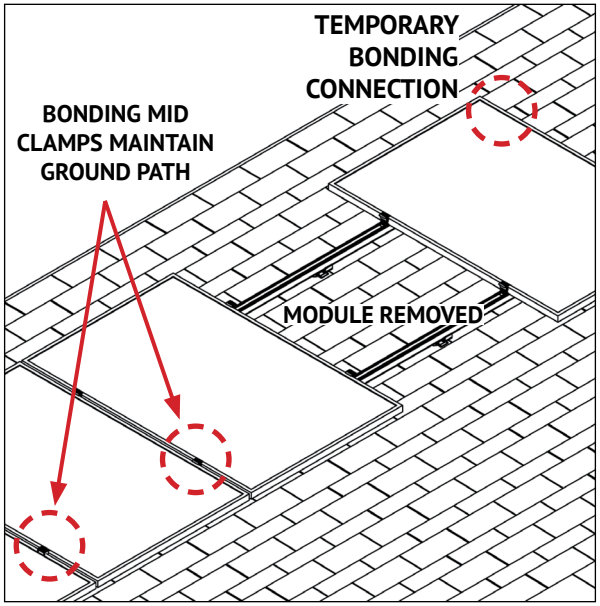

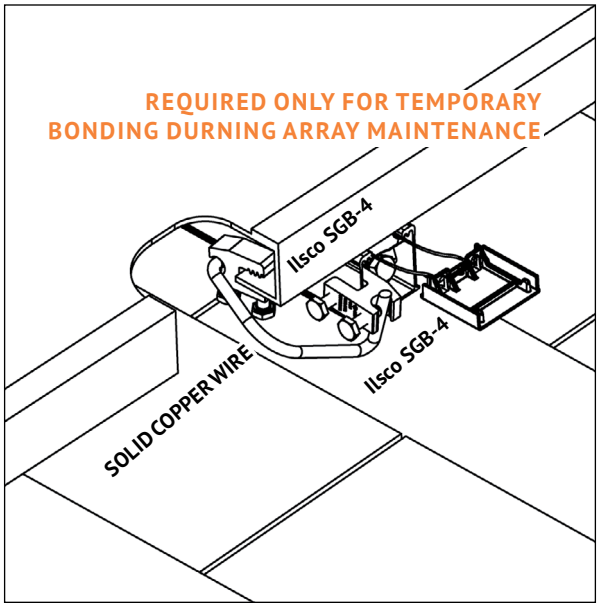

TEMPORARY BONDING CONNECTION DURING ARRAY MAINTENANCE

When removing modules for replacement or system maintenance, any module left in place that is secured with a bonding Midclamp will be properly grounded. If a module adjacent to the end module of a row is removed or if any other maintenance condition leaves a module without a bonding mid clamp, a temporary bonding connection must be installed as shown

- Attach Ilsco SGB4 to wall of rail
- Attach Ilsco SGB4 to module frame
- Install solid copper wire jumper to Ilsco lugs

⚠ CAUTION

Module removal may disrupt the bonding path and could introduce the risk of electric shock. Follow above mentioned instructions to maintain the bonding path.

ELECTRICAL CONSIDERATIONS

NXT UMOUNT is intended to be used with PV modules that have a system voltage less than or equal to that allowable by NEC. For standard system grounding a minimum 10AWG, 105°C copper grounding conductor should be used to ground a system, according to the National Electric Code (NEC). It is the installer's responsibility to check local codes, which may vary. See below for interconnection information.

INTERCONNECTION INFORMATION

There is no size limit on how many NXT UMOUNT & PV modules can be mechanically interconnected for any given configuration, provided that the installation meets the requirements of applicable building and fire codes.

GROUNDING NOTES


The installation must be conducted by a licensed and bonded electrician or solar contractor in accordance with the National Electric Code (NEC) and the authority having jurisdiction. Please refer to these resources in your location for required grounding lug quantities specific to your project.

The grounding / bonding components may overhang parts of the array so care must be made when walking around the array to avoid damage.

Conductor fastener torque values depend on conductor size. See product data sheets for correct torque values.

PERIODIC INSPECTION

Conduct periodic inspections for loose components, loose fasteners or any corrosion, immediately replace any affected components.

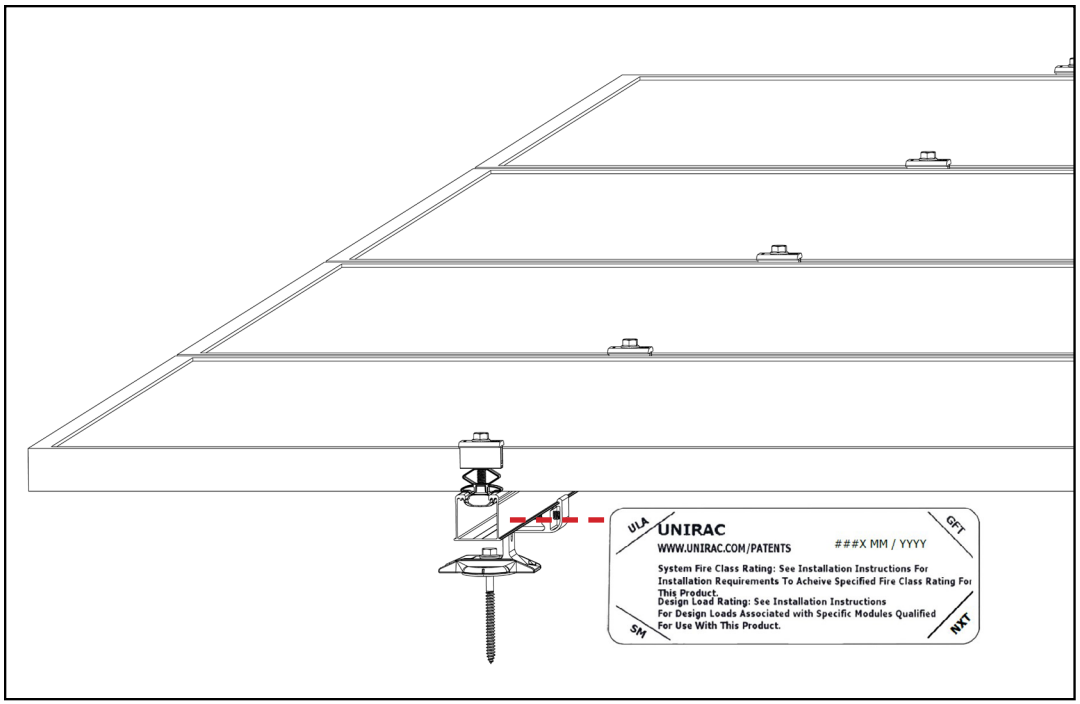

INSTALL UL2703 CERTIFICATION MARKING LABEL:
After the racking system is fully assembled, a single label should be applied to the rail at the edge of the array. One certification label is supplied in every box of 20 clamps.

Note:
- **The sticker label should be placed such that it is visible.**
- **Cutoff all corners except NXT before applying on rail.**

The NXT UMOUNT system has been certified and listed to the UL 2703 standard (Rack Mounting Systems and Clamping Devices for Flat-Plate Photovoltaic Modules and Panels). This standard included electrical grounding, electrical bonding, mechanical load and fire resistance testing.

SYSTEM LEVEL FIRE CLASSIFICATION

The system fire class rating requires installation in the manner specified in the NXT UMOUNT Installation Manual. NXT UMOUNT has been classified to the system level fire portion of UL 2703. NXT UMOUNT has achieved system level performance for steep sloped roofs and low sloped roofs. System level fire performance is inherent in the NXT UMOUNT design, and no additional mitigation measures are required. See table below for definition of steep sloped and low sloped roofs. The system is to be mounted over fire resistant roof covering rated for the application. There is no required minimum or maximum height limitation above the roof deck to maintain the system fire rating for NXT UMOUNT. Approved Module Types & System Level Fire Ratings are listed below:

Roof Type	Module Type	System Level Fire Rating	Rail Direction	Module Orientation
Steep Slope - roof pitches ⩾ 2 in/ft	Type 1, 2, 3 with metal frame, 10 with metal frame, 19, 22, 25, 29, 30 & 38	Class A	Parallel OR Perpendicular to Ridge	Landscape OR Portrait
Low Slope - roof pitches < 2in/ft	Type 1, 2, 29, 30 & 38			


MECHANICAL LOAD TEST MODULES

The modules selected for UL 2703 mechanical load testing were selected to represent the broadest range possible for modules on the market. The tests performed covers module frame thicknesses greater than or equal to 1.0 mm, single and double wall frame profiles (some complex frame profiles could require further analysis to determine applicability), and clear and dark anodized aluminum frames. PV modules may have a reduced load rating, independent of the NXT UMOUNT rating. Please consult the PV module manufacturer's installation manual for more information.

RAIL TYPE	Tested Module	Design Load Ratings	Tested Loads	Tested Module Area
NXT RAIL	SunPower SPR-A440 -COM	Down: 50 psf, Up: 50 psf , Slope: 15 psf	Down: 75 psf, Up: 75 psf , Slope: 23 psf	21.86 sq ft
	Jinko JKM-xxxM 72HL4-V	Down: 39.47 psf, Up: 22.28 psf, Slope: 8 psf	Down: 59.20 psf, Up: 33.42 psf, Slope: 12 psf	27.76 sq ft
	Q Cells Q Peak Duo XL-G11.3/BFG	Down: 37.06 psf, Up: 20.97 psf, Slope: 7.53 psf	Down: 55.60 psf, Up: 31.46 psf, Slope: 11.3 psf	29.49 sq ft
	QPEAK.DUO XL-G11S.3/BFG580	Down: 36.50 psf, Up:20.96 psf, Slope: 7.6 psf	Down: 54.80 psf, Up:31.45 psf, Slope: 11.4 psf	30.05 sq ft
NXT HD RAIL	JA Solar: JAM72D30-xxx/MB	Down: 50.47 psf, Up: 25.57 psf, Slope: 8.20 psf	Down: 75.7 psf, Up: 38.35 psf, Slope: 12.3 psf	27.81 sq ft

UL2703 CERTIFICATION MARKING:
Unirac NXT UMOUNT is listed to UL 2703. Certification marking is embossed on all Combo Clamps as shown. Labels with additional certification information are provided with clamps and must be applied to the NXT UMOUNT Rail at the edge of the array.

Note: This racking system may be used to ground and/or mount a PV module complying with UL1703/UL61730 only when the specific module has been evaluated for grounding and/or mounting in compliance with the included instructions.

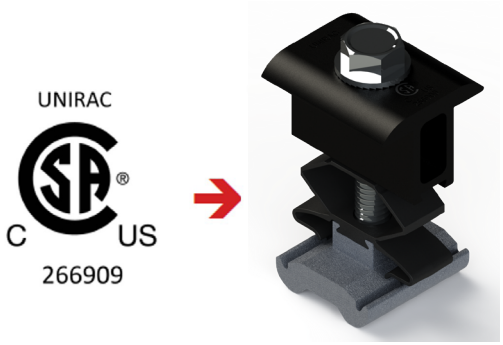

Electrical Bonding and Grounding Test Modules

The list below is not exhaustive of compliant modules but shows those that have been evaluated and found to be electrically compatible with the NXT UMOUNT system.

Manufacture	Module Model / Series
Aionrise	AION60G1 AION72G1
Aleo	P-Series S-Series
AMPS	AMPS-xxxN-108BB AMPS-xxxP-54BB
Aptos Solar	DNA-108-(MF/BF)10-xxxW DNA-108-MFN10-xxxW DNA-120-(MF/BF)10-xxxW DNA-120-(MF/BF)23 DNA-120-(MF/BF)26 DNA-120-MF10 DNA-144-(MF/BF)23 DNA-144-(MF/BF)26 DNA-144-BF10-xxxW-DG
Astronergy	CHSM6612 M, M/HV CHSM6612P/HV Series CHSM6612P Series CHSM66M(DG)/F-BH CHSM72M(DG)/F-BH CHSM72M-HC CHSM72N(DG)/F-BH
Auxin	AXN10Mxxx AXN6M610T AXN6M612T AXN6P610T AXN6P612T AXNG1M SERIES

Manufacture	Module Model / Series
Axitec	AC-xxx(M/P)/60S AC-xxx(M/P)/72S AC-xxxMBT/144V AC-xxxMH/120(S/V/SB/VB) AC-xxxMH/144(S/V/SB/VB) AC-xxxP/156-60S AC-xxxTGB/108BB AC-xxxTGB/144TS AC-xxxTGB/144WS-US AC-xxxTGB/96BB
Bila Solar	AA550US-6x24GG
Bluesun Solar	BSMxxxM10-72HBD
Boviet Solar	BVM6610, BVM6612 BVM6610M-xxxS-H-HC BVM6610M-xxxS-H-HC-BF BVM6612M-XXXS-H-HC-BF-DG BVM7612M-H-HC-BF-DG
BYD	P6K MHK-36 Series
Canadian Solar	CS1(H/K/U/Y)-MS CS3K-(MB/MB-AG/MS/P/P HE/PB-AG) CS3L-(MS/P), CS3N-MS CS3U-(MB/MB-AG/MS/P/P HE/PB/PB-AG) CS3W-(MB-AG/MS/P/P-PB-AG) CS3Y-MB-AG, CS5A-M CS6.1-54TM-H CS6.1-60TM-H CS6.1-72TB-H CS6.2-48TM-xxxH CS6.2-66TB-xxxH

Manufacture	Module Model / Series
Canadian Solar(Cont.)	CS6.2-66TB-xxxHR CS6K-(M/MS/MS AllBlack/P/P HE) CS6P-(M/P), CS6R-MS CS6R-xxxMS-HL CS6U-(M/P/P HE), CS6W-(MB-AG/MS) CS6W-xxx-TB-AG CS6X-P, CSX-P, CS7L-MB-AG CS7L-xxxMB-AG ELPS CS6(A/P)-MM
Centrosolar America	C-Series E-Series
CertainTeed	CT2xxMxx-01 CT2xxPxx-01 CTM10400HC11-06 CTM10400HC11-08 CTM10400HC11-09 CTTCxxxHC12-08 CTxxxHC11-04 CTxxxHC11-06 CTxxxMxx-01 CTxxxMxx-02 CTxxxMxx-03 CTxxxMxx-04 CTxxxPxx-01 CT54M10XXX-N07 CT72M10XXX-N07
Eco Solargy	Apollo 1000 Orion 1000

- The frame profile must not have any feature that might interfere with the bonding devices that are integrated into the racking system
- Use with a maximum over current protection device OCPD of 30A
- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- **Listed models can be used to achieve a Class A fire system rating, for steep slope or low slope applications, only when modules of fire typed mentioned in Appendix A, Page 54 are used.**

Electrical Bonding and Grounding Test Modules

The list below is not exhaustive of compliant modules but shows those that have been evaluated and found to be electrically compatible with the NXT UMOUNT system.

Manufacture	Module Model / Series
Elite Solar	ET-N772TBHxxxGL
EMMVEE	ExxxHCBG144-T ExxxHCBT144-T Titanium Clear
Energy America	ZLK-xxx
Es Foundry	ES-DN8-H54B-xxx ES-DN8-H72-xxx ES-DP8-H54B-xxx ES-DP8-H72-xxx
ET Solar	ET AC Module ET-M772BH520-550WW/WB ET-M772BHxxxTW/TB ET Module
Fellow Energy	FE72-18X(ND)
First Solar	FS-6XXX(A) FS-6XXX(A)-P FS-6XXX(A)-P-I
Flextronics	FXS-xxxBB
Freedom Forever	FF-MP-BBB-xxx FF-MP1-BBB-xxx
FreeVolt	PVGraf
GCL	GCL-P6 GCL-M6 Series
Gstar Solar	GSD7S54T-xxxBT GSP7G54M(H)

Manufacture	Module Model / Series
Hansol	TD-AN3 TD-AN4 UB-AN1 UD-AN1
Hanwha SolarOne	HSL 60
Heliene	132HC M10 SL Monofacial Module 144HC M10 SL Bifacial 144HC M6 156HC M10 SL Bifacial 36M, 36P 60M, 60P, 72M & 72P Series 144HC M10 NTYP SL Bifacial 156HC M10 NTYP SL Bifacial
HT-SAAE	HT60-156M(V)-C HT60-156M-C HT72-156(M/P) HT72-156M(PD)-BF HT72-156M(PDV)-BF HT72-156P(V)-C HT72-156P-C HT72-166M HT72-18X HT72-18X(ND)-F
Hyperion Solar (Runergy)	HY-DH108N8B HY-DH108P8(B) HY-DH144P8 HY-DH156N8 HY-DH156P8

Manufacture	Module Model / Series
Hyundai	HiN-TxxxOJ HiS-S400PI HiS-SxxxGI HiS-SxxxOJ HiS-SxxxXG(BK) HiS-SxxxYH(BK) HIS-TxxxNF(BK) HiS-TxxxNJ KG, MG, RW, TG, RI, RG, TI, KI, HI Series HiA-SxxxHG HiD-SxxxRG(BK) HiN-SxxxXG(BK) HiN-TxxxNF(BK) HiN-TxxxNI HiN-TxxxNJ
Illuminate USA	IL5-72HBD-xxx M IL8-66HGD-xxx M
Imperial Star	ISM7-SHDD108-400/M
INDEPWR Solar	iPWR-M10-54BX2S-xxxW iPWR-M10-60BX2S-xxxW
ITEK	iT-SE Series
Japan Solar	JPS-60 JPS-72 Series
JA Solar	JAM54D41-xxx/MB JAM54S30 xxx/MR JAM54S31 xxx/MR JAM6(K)-60/xxx JAM66D45 LB

- The frame profile must not have any feature that might interfere with the bonding devices that are integrated into the racking system
- Use with a maximum over current protection device OCPD of 30A
- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- **Listed models can be used to achieve a Class A fire system rating, for steep slope or low slope applications, only when modules of fire typed mentioned in Appendix A, Page 54 are used.**

Electrical Bonding and Grounding Test Modules

The list below is not exhaustive of compliant modules but shows those that have been evaluated and found to be electrically compatible with the NXT UMOUNT system.

Manufacture	Module Model / Series
JA Solar (Cont.)	JAM72D10 xxx/MB JAM72D30MB JAM72D40 xxx/MB JAM72S30 /MR JAM78D10MB JAP6(k)-72-xxx/4BB JAP6 60-xxx JAP72S##-xxx/** JAP6(k)-60-xxx/4BB, JAP60S##-xxx/** JAM6(k)-72-xxx/**, JAM72S##-xxx/** JAM6(k)-60-xxx/**, JAM60S##-xxx/** i. ##: 01, 02, 03, 09, 10 ii. **: SC, PR, BP, HiT, IB, MW, MR ** = Backsheet, ## Cell technology
Jinko	JKM & JKMS Series JKMxxxM-6RL3-B JKMxxxM-72HBL-V JKMxxxM-72HL4-(T)V JKMxxxM-72HL4-TV JKMxxxM-72HLM-TV JKMxxxM-72HL-V JKMxxxM-7RL3-TV JKMxxxM-7RL3-V JKMxxxN-54HL4-B JKMxxxN-72HL4-BDV JKMxxxN-72HL4-BDX JKMxxxN-72HL4-TV JKMxxxN-72HL4-BDV (30mm&35mm Frame Height) JKMxxxN-54HL4R-B (fire type 1 only)

Manufacture	Module Model / Series
Kyocera	KD-F & KU Series
LA Solar	BLA Model LSxxxBF LSxxxBL LSxxxBL (410 watt) LSxxxHC LSxxxHC(166) LSxxxHC (430-450 watt range)
LG Electronics	LGxxx(A1C/M1C/M1K/N1C/N1K/Q1C/Q1K/QAC/QAK)-A6 LGxxx(E1C/E1K/N1C/N1K/N2T/N2W/S1C/S2W/Q1C/Q1K)-A5 LGxxx(M1C/N1C/Q1C/Q1K)-N5 LGxxx(N1C/N1K/N2T/N2W)-E6 LGxxx(N1C/N1K/N2W/Q1C/Q1K)-V5 LGxxx(N1C/N1K/N2W/S1C/S2W)-G4 LGxxx(N1K/N1W/N2T/N2W)-L5 LGxxxN1K-B6 LGxxxN2T-B5 LGxxxN2T-J5 LGxxxN2W-B3 LGxxxN3K-V6
LONGi	LR4-60(HPB/HPH) LR4-72(HPH) LR4-72HBD xxxM LR5-54HABB-xxx M LR5-54-HPB-xxx M LR5-54HTB xxxM LR5-72HBD xxx M LR6-60

Manufacture	Module Model / Series
LONGi (Cont.)	LR6-60(BK/HPB/HPH/HV/PB/PE/PH) LR6-72 LR6-72(BK/HV/PB/PE/PH) LR7-72HGD-xxx M LR8-54HGBB LR8-66HGD-xxx M RealBlack LR4-60HPB RealBlack LR6-60HPB
Maxeon	SPR-MAX3-xxx-COM SPR-MAX3-XXX-R SPR-MAX3-XXX-BLK-R SPR-MAX6-xxx SPR-MAX6-xxx-BLK
Meyer Burger	Meyer Burger Black Meyer Burger White Meyer Burger Glass
Mission Solar Energy	MSE Mono MSE Perc MSExxx(SR8T/SR8K/SR9S/SX5T) MSExxx(SX5K/SX6W) MSExxxHT0B MSExxxSX5K MSExxxSX5T MSExxxSX6Z MSExxxSX9R MSExxxSX9Z MSH10-xxxHN4G MSH10-xxxHN4G-DC11 MSH10-xxxHT4T MSI10-xxxHN4G

- The frame profile must not have any feature that might interfere with the bonding devices that are integrated into the racking system
- Use with a maximum over current protection device OCPD of 30A
- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- **Listed models can be used to achieve a Class A fire system rating, for steep slope or low slope applications, only when modules of fire typed mentioned in Appendix A, Page 54 are used.**

Electrical Bonding and Grounding Test Modules

The list below is not exhaustive of compliant modules but shows those that have been evaluated and found to be electrically compatible with the NXT UMOUNT system.

Manufacture	Module Model / Series
Mission Solar Energy (Cont.)	MSI10-xxxHT4G MSI10-xxxHT4T MSN10xxxHT4T MSX10-xxxHN0B
Mitrex	Mxxx-L3H Mxxx-I3H
Mitsubishi	MJE MLE Series
mSolar	108BB HC Series (TXI10-xxx108BB) 144BB HC Series (TXS6-xxx144BB)
Neo Solar Power Co.	D6M Series
NE Solar	NESE xxx-60MH-M6 NESE XXX 66MHB-G12 NESE xxx-66THB-G12R NESE xxx-72MHB-M10 NESE xxx 72MHT-M10 NESE xxx 72THB-M10 NESE xxx 72MHB-M10
Optivolt	OPT10MxxxB
Panasonic	EVPVxxx EVPVxxx(H/K/PK/HK/HK2) VBHNxxxKA VBHNxxxKA03/04 VBHNxxxSA06/SA06B/SA11/SA11B VBHNxxxSA15/SA15B/SA16/SA16B VBHNxxxSA17/SA17G/SA17E/SA18/SA18E VBHNxxxZA01/ZA02/ZA03/VBHNxxxZA04
Peimar	SGxxxM (FB/BF) SMxxxM
Philadelphia Solar	PS-M108(HCBF)-400W (30 & 35mm frames)

Manufacture	Module Model / Series
Philadelphia Solar (Cont.)	PS-M144(HCBF)-xxxW PS-MNB108(HCBF)-xxxW PS-MNB144(HCBF)-xxxW PS-MNB156(HCBF)-xxxW
Phono Solar	PSxxxM1-20/U PSxxxM1-20UH PSxxxM1-20/UH PSxxxM1H-20/U PSxxxM1H-20UH PSxxxM1H-20/UH PSxxxM-24/T PSxxxM-24/TH PSxxxM4(H)-24/TH PSxxxM8GFH-24TNH PSxxxMH-24/T PSxxxMH-24/TH
Prism Solar	P72 Series P72X-xxx
Q Cells	Peak G5(SC) , G6(+)(SC)(AC), G7, G8(+), Peak L-G5, L-G6, L-G7, L-G8(BFF) Plus, Pro, Peak, G3, G4, Plus, Pro, Peak L-G2, L-G4, L-G5 Q.PEAK DUO BLK ML-G10.C1+/AC Q.PEAK DUO BLK ML-G10+ / t Q.PEAK DUO BLK ML-G10+ / TS Q.PEAK DUO ML-G12S.3/BFG Q.PEAK DUO ML-G12S.7/BFG Q.PEAK DUO(BLK)-G6+ Q.PEAK DUO (BLK)-G7 Q.PEAK DUO (BLK) G8(+) Q.PEAK DUO (BLK) ML-G10(a)(+)

Manufacture	Module Model / Series
Q Cells (Cont.)	Q.PEAK DUO (BLK) ML-G9(+) Q.PEAK DUO BLK G10(+) Q.PEAK DUO BLK G10+ /AC Q.PEAK DUO BLK-G6+/TS Q.PEAK DUO BLK ML-G10.a+ Q.PEAK DUO BLK ML-G10+/AC Q.PEAK DUO BLK ML-G10.B+ Q.PEAK DUO BLK ML-G10.C+ Q.PEAK DUO-G10+ Q.TRON BLK M-G2.H+ Q.TRON BLK M-G2.H1+/AC Q.TRON BLK M-G2+ SERIES Q.TRON M-G2+ SERIES Q.TRON ML-G3.3/BFG Q.TRON XL-G2.3 / BFG Q.PEAK DUO BLK ML-G10.XY+/AC (where “X” = any letter between A to W, where “Y” = any number between 1 to 9.) QPEAK DUO G10.C1+ AC Q.PEAK DUO L-(G7/G7.1/G7.2/G7.3/G7.7) Q.PEAK DUO L-(G8/G8.1/G8.2/G8.3) Q.PEAK DUO L-G6.3 / BFG Q.PEAK DUO L-G8.3 (BFF/BFG/BGT) Q.PEAK DUO ML-G12S.3 / BFG Q.PEAK DUO ML-G12S.d / BFG Q.PEAK DUO XL-(G10/G10.2/G10.3/G10.c/G10.d) Q.PEAK DUO XL-(G11.2/G11.3) Q.PEAK DUO XL-(G9/G9.2/G9.3) Q.PEAK DUO XL-G10.3/BFG Q.PEAK DUO XL-G10.d/BFG Q.PEAK DUO XL-G11.3/BFG

- The frame profile must not have any feature that might interfere with the bonding devices that are integrated into the racking system
- Use with a maximum over current protection device OCPD of 30A
- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- **Listed models can be used to achieve a Class A fire system rating, for steep slope or low slope applications, only when modules of fire typed mentioned in Appendix A, Page 54 are used.**

Electrical Bonding and Grounding Test Modules

The list below is not exhaustive of compliant modules but shows those that have been evaluated and found to be electrically compatible with the NXT UMOUNT system.

Manufacture	Module Model / Series
Q Cells (Cont.)	Q.PEAK DUO BLK ML-G10.C+ Q.PEAK DUO BLK ML-G10.D+ Q.PEAK DUO BLK ML-G10.D1+/AC Q.PEAK DUO ML-G12S.P3 / BFG Q.PEAK DUO XL-G11S Q.PEAK DUO XL-G11S.3 / BFG Q.PEAK DUO XL-G11S.B3 / BFG Q.PEAK DUO XL-G11S.L3 / BFG Q.PEAK DUO XL-G9.3/BFG Q.TRON BLK M-G2+ Q.TRON BLK M-G2(.H1)(.F1)(.C1)+/AC Q.TRON BLK M-G2+ AC Q.TRON BLK M-G2+/AC Q.TRON BLK M-G2.C+ Q.TRON BLK M-G2.C1+/AC Q.TRON BLK M-G2.C3+/AC Q.TRON BLK M-G2.C4+/AC Q.TRON BLK M-G2.D+ Q.TRON BLK M-G2.D1+/AC Q.TRON BLK M-G2.D2+/AC Q.TRON BLK M-G2.F+ Q.TRON BLK M-G2.F1+/AC Q.TRON BLK M-G2.Y+
REC	RECxxxAA (BLK/Pure/Pure-R/ Pure-RX/ Pure 2/ Pro M) RECxxxAA Pure-RX RECxxxAA PURE-RX-DC

Manufacture	Module Model / Series
REC (Cont.)	RECxxxNP (N-PEAK) RECxxxNP2 (Black) RECxxxNP3 Black RECxxxPE RECxxxPE72 RECxxxTP RECxxxTP2(M/BLK2) RECxxxTP2S(M)72 RECxxxTP3M (Black) RECxxxTP4 (Black) RECxxxTP72
Regitec Solar	RMHT54/xxxAB2
Renesola	All 60-cell modules RS6-xxxNBG-E3
Risen	RSM110-8-xxxBMDG RSM Series
Runergy	HY-DH132N11 HY-DH96N11B
SEG Solar	SEG-xxx-BMA-BG SEG-xxx-BMA-HV SEG-xxx-BMA-TB SEG-xxx-BMB-BG SEG-xxx-BTA-BG SEG-xxx-BMB-HV SEG-XXX-BMB-TB SEG-xxx-BMD-BG SEG-xxx-BMD-HV SEG-xxx-BMD-TB SEG-xxx-BTB-BG SEG-xxx-BTD-BG

Manufacture	Module Model / Series
S-Energy	SN72 SN60 Series SL45-60BGI/BHI SL45-60MBI-xxxZ SL40-60MAI/MBI/MCI-xxxV
Seraphim	SEG-(6PA/6PB/6MA/6MA-HV/6MB/E01/E11) SRP-(6QA/6QB) SRP-320-375-BMB-HV SRP-390-405-BMD-HV SRP-390-450-BMA-HV SRP-xxx-6MB-HV SRP-xxx-BMC-HV SRP-xxx-BMD-HV SRP-xxx-BMZ-HV SRP-xxx-BTA-BG SRP-xxx-BTB-BG SRP-xxx-BTC-BG SRP-xxx-BTD-BG SRP-xxx-BTE-BG
Sharp	NU-SA NU-SC Series
Silfab	SILxxx(BG/BK/BL/HC/HC+/HL/HM/HN/ML/NL/NT/NX/NU/QD/QM) SIL-xxx XL SIL-xxx XM SIL-xxx XM+ SLA-M, SLA-P, SLG-M, SLG-P & BC Series
Sirius PV	ELNSM54M-HC-BF Series

- The frame profile must not have any feature that might interfere with the bonding devices that are integrated into the racking system
- Use with a maximum over current protection device OCPD of 30A
- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- **Listed models can be used to achieve a Class A fire system rating, for steep slope or low slope applications, only when modules of fire typed mentioned in Appendix A, Page 54 are used.**

Electrical Bonding and Grounding Test Modules

The list below is not exhaustive of compliant modules but shows those that have been evaluated and found to be electrically compatible with the NXT UMOUNT system.

Manufacture	Module Model / Series
Sirius PV (Cont.)	ELNSM54M-HC Series ELNSM54M-HC-N
Solar4America	S4Axxx-108MH10BB S4Axxx-108MH10xxx S4Axxx-108TH10xxx S4Axxx-144MH10xxx S4Axxx-144TH10xxx S4Axxx-144TH16xxx S4Axxx-72MH5BB
SolarEver USA	SE-166*83-xxxM-120N SE-182*91-xxxM-108N SE-182*105-xxxM-96-BD
Solaria	PowerXT-xxxR-(AC/PD/BD) PowerXT-xxxC-PD PowerXT-xxxR-PM (AC) PowerX-400R
Solar Space	SS8-54HDB-xxx-N SS8-54HD-xxx-N SS8-72HD-xxx-M SS8-72HD-xxx-N SSA-48HDB-xxx-N SSA-48HD-xxx-N SSA-54HDB-xxx-N SSA-54HD-xxx-N SS8-78HD-xxx-M SS9-66HD-xxx-N SSA-66HD-xxx-N
Solartech	STU HJT, STU PERC & Quantum PERC
SolarWorld	Sunmodule Protect, Sunmodule Plus/Pro
Sonali	SS-M-360 to 390 Series

Manufacture	Module Model / Series
Sonali (Cont.)	SS-M-390 to 400 Series SS-M-440 to 460 Series SS-M-430 to 460 BiFacial Series
Sun Edison	F-Series, R-Series
Suniva	MV Series & Optimus Series (35mm)
Sunket Solar	SKT580M10-144S2
Sunmac Solar	M754SH-BB Series
SunPlus Optimum	SR4-54HTB-xxxM
SunPower	SPR E20 435 COM (G4 Frame) Axxx-BLK-G-AC SPR-Mxxx-H-AC SPR-Mxxx-BLK-H-AC
Sunpro Power	SPDGxxx-120M12 SPDGxxx-N108M10 SPDGxxx-N144M10
SunTech	STP, STPXXXS - B60/Wnhb
Talesun	Hipor M, Smart TP572, TP596, TP654, TP660, TP672 TD6I72M TD7G72M TM3G48M TM3G54M TM3G66M TM7G54M TM7G60M TM7G72M TP6F72M TP6F72M(H)

Manufacture	Module Model / Series
Talesun (Cont.)	TP7G54M(H)
Tesla	SC, SC B, SC B1, SC B2, TxxxS TxxxH Tesla Solar Panel TSP-415/TSP-420
Thornova	TS-BG54 TS-BG72 TS-BBT54(xxx) TS-BGT72(xxx)
TP Solar	TPxxxVG12R16NB
Trina Solar	DE06, DE09.05, DE09C.07 DEG15HC.20(II), DEG15MC.20(II) DEG15VC.20(II), DE18M(II), DEG18MC.20(II) DE19, DEG19C.20 PA05, PD05, DD05, DD06 PD14, PE14, DD14, DE14, DE15, DE15V(II) TSM-DE06X.05(II) TSM-DE09.05 TSM-DE09.08 TSM-DE09C.07 TSM-DE15H(II) TSM-NE09RC.05 TSM-NE09RH.05 TSM-NE19RC TSM-NEG19RC.20 TSM-NEG9RH.25
TSMC	TS-150C2 CIGSw
Universal Solar	UNI4xx-144BMH-DG

- The frame profile must not have any feature that might interfere with the bonding devices that are integrated into the racking system
- Use with a maximum over current protection device OCPD of 30A
- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- **Listed models can be used to achieve a Class A fire system rating, for steep slope or low slope applications, only when modules of fire typed mentioned in Appendix A, Page 54 are used.**

Electrical Bonding and Grounding Test Modules

The list below is not exhaustive of compliant modules but shows those that have been evaluated and found to be electrically compatible with the NXT UMOUNT system.

Manufacture	Module Model / Series
Universal Solar (Cont.)	UNI5xx-144BMH-DG UNIxxx-108M-BB UNIxxx-120M-BB UNIxxx-120MH
Upsolar	UP-MxxxP UP-MxxxM(-B)
URECO	D7Kxxx(H7A/H8A) D7Mxxx(H7A/H8A) F6MxxxE7G-BB FAKxxx(C8G/E8G) FAMxxxE7G-BB FAMxxxE8G(-BB) FBKxxxM8G FBMxxxM7G-BB FBMxxxMFG-BB
Vikram Solar	Eldora, Somera, Ultima PREXOS VSMDHT.60.AAA.05 PREXOS VSMDHT.72.AAA.05 Paradea VSMDH.72.AAA.05
Vina	VNS-72M1-5-xxxW-1.5, VNS-72M3-5-xxxW-1.5, VNS-144M1-5-xxxW-1.5, VNS-144M3-5-xxxW-1.5, VNS-120M3-5-xxxW-1.0
VSUN	VSUN4xx-144BMH VSUN4xx-144BMH-DG VSUN5xx-144BMH-DG VSUNxxx-108BMH VSUNxxx-108M-BB

Manufacture	Module Model / Series
VSUN (Cont.)	VSUNxxx-108MH VSUNxxx-120BMH VSUNxxx-120M-BB VSUNxxx-132BMH VSUNxxx-144BMH VSUNxxx-144M-BB VSUNxxx-144MH VSUNxxx-144M-BW VSUNxxx-60M-BB VSUNxxx-72MH VSUNxxxN-108BMH-BB VSUNxxxN-108BMH-BB (SoftPaw) VSUNxxxN-108BMH-DG-BB VSUNxxxN-120BMH-BB (SoftPaw) VSUNxxxN-132BMHR VSUNxxxN-144BMH VSUNxxxN-144BMH-DG VSUNxxxN-144MH
Waaree	Arka Series WSMDi Bi-55-xxx BiN-08-xxx
Winaico	WST WSP Series
Yingli	YGE YLM Series
Yotta Energy	YSM-B450-1
ZNShine Solar	ZXM6-72 Series ZXM6-NH120 Series ZXM6-NH144 ZXM6-NHLDD144

Manufacture	Module Model / Series
ZNShine Solar (Cont.)	ZXM7-SH108 Series ZXM7-SHDB144 ZXM7-SHLDD144 ZXM7-UHLDD108 ZXM7-UHLDD144 ZXM8-GPLDD132 Series ZXM8-TPLDD132

- The frame profile must not have any feature that might interfere with the bonding devices that are integrated into the racking system
- Use with a maximum over current protection device OCPD of 30A
- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID
- **Listed models can be used to achieve a Class A fire system rating, for steep slope or low slope applications, only when modules of fire typed mentioned in Appendix A, Page 54 are used.**