




# INSTALLATION GUIDE

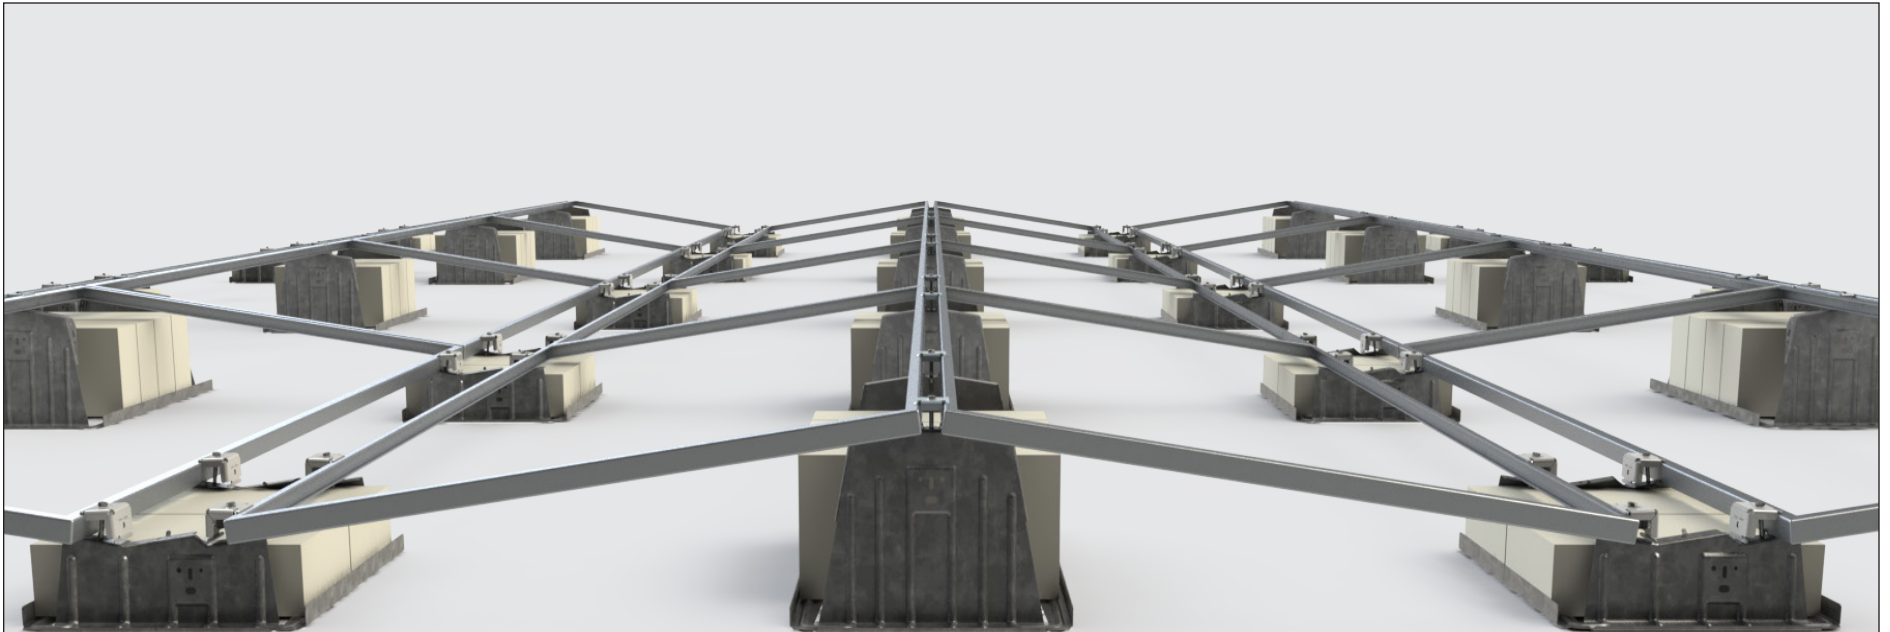

## UNIRAC Code-Compliant Installation Manual

© 2022 by Unirac, Inc. All rights reserved.



# INSTALLATION GUIDE

---

## TABLE OF CONTENTS

|                                                    |       |
|----------------------------------------------------|-------|
| Tools & Specifications .....                       | 1     |
| System Components .....                            | 2-3   |
| Locate Array & Place Bays .....                    | 4     |
| Place Ballast .....                                | 5     |
| Module Placement & Attach Clamps .....             | 6     |
| Attach Clamps .....                                | 7     |
| Module Installation & Wire Management.....         | 8     |
| Ballast Bay Roof Attachment .....                  | 9     |
| Microinverter Installation & Wire Management. .... | 10    |
| Connect Grounding Lug.....                         | 11    |
| Electrical Diagram .....                           | 12    |
| Temporary Bonding Procedures .....                 | 13    |
| System Level Fire Code Compliance .....            | 14    |
| Mechanical Load Testing.....                       | 15    |
| Compatible Modules .....                           | 16-21 |

## GENERAL NOTES:

If provided refer to construction drawings for project specific details.  
Construction drawings have precedence over these installation guidelines.

### TECHNICAL SPECIFICATIONS:

Material Types: 16G ASTM A653 GR50 Steel

Coating(s): G235 Galvanization, G180 Galvanization, G40 Galvanization + InterCoat® ChemGuard, G60 Galvanization + InterCoat® ChemGuard or G80 Galvanization + InterCoat® ChemGuard

Hardware: Stainless Steel

Bonding and Grounding: UL2703 Listed Continuous Bonding Path.

### TOOLS REQUIRED OR RECOMMENDED FOR LAYOUT, ATTACHMENTS & INSTALLATION:

- Drill (Do Not Use An Impact Driver)
- 7/16" Socket
- Torque Wrench
- Tape Measure
- Chalk Reel
- Optional Spacers (See Diagram - Page Right)

### GENERAL HARDWARE:


- ¼-20 X 2 ½" Hex Head Bolt - Module Clamps
- ¼-20 Stainless Steel U-Nuts

### SAFETY:

All applicable OSHA safety guidelines should be observed when working on a PV installation job site. The installation and handling of PV solar modules, electrical installation and PV racking systems involves handling components with potentially sharp metal edges. Rules regarding the use of gloves and other personal protective equipment should be observed.


### LAYOUT ASSISTANCE TOOL:

| Module Dimensions:                                  | RMDT | Module location:                 | Spacing Equations (in Inches): |
|-----------------------------------------------------|------|----------------------------------|--------------------------------|
| Module Length (ML) =                                | 1    | Valley N/S Column Spacing =      | $ML + G - 19.70"$              |
| Module Width (MW) =                                 | 2    | Edge Valley N/S Column Spacing = | $ML + G / 2 - 29.55"$          |
| Preferred module gap?<br>(1/4" - 1" is permissible) | 3    | Edge E/W Row Spacing =           | $(MW \times 0.990) - 15.69"$   |
|                                                     | 4    | E/W Row Spacing =                | $(MW \times 0.990) - 11.20"$   |
| East/West Module Gap (G) =                          | 5    | Ridge N/S Column Spacing =       | $ML + G - 26.20"$              |
|                                                     | 6    | Edge Ridge N/S Column Spacing =  | $ML + G / 2 - 39.30"$          |

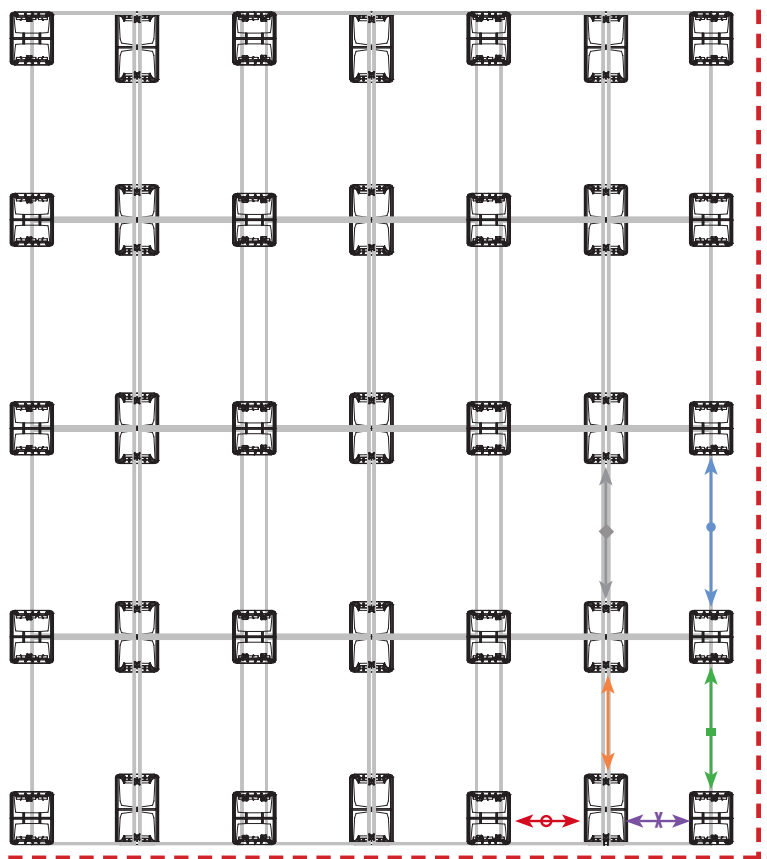


### SPACERS - OPTIONAL


- VALLEY COLUMN SPACING 
- EDGE VALLEY COLUMN SPACING 
- EDGE E/W ROW SPACING 
- E/W ROW SPACING 
- RIDGE N/S COLUMN SPACING 
- EDGE RIDGE N/S COLUMN SPACING 

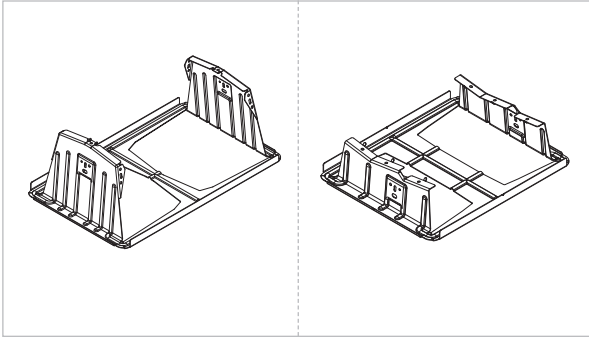


**BALLAST BAY:** The Ballast Bay is constructed of a high strength low alloy steel with a coating to protect against corrosion. This system has a modular design that allows for easy installation around roof obstructions and accommodates roof undulations. The Ballast Bays are designed to nest within each other to optimize shipping logistics. **NOTE: Systems installed on PVC roofs require ballast bays with pre-installed Santoprene pads.**

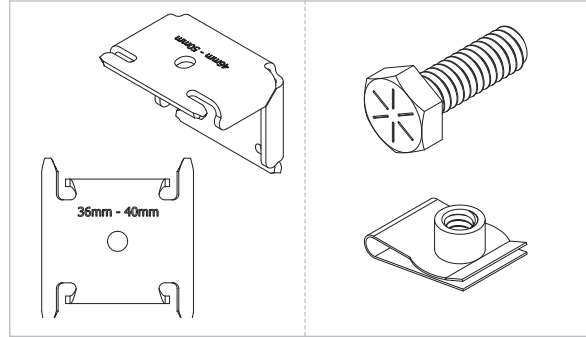


**CLAMP & HARDWARE:** The Module Clamp is made of Stainless Steel and can be used with module frame heights indicated on the clamp. The clamps are a portion of the UL2703 Listed system when installed according to this installation guide. A 1/4-20 stainless steel bolt and u-nut are the associated hardware for installing clamps.

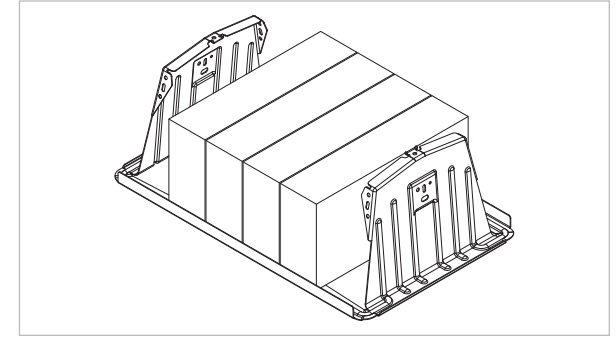

**RIDGE BALLAST BLOCK:** The Ridge ballast bay can fit up to 5 standard 4"x8"x16" solid concrete cap blocks. Block weight can range from 26 – 38 lbs and shall meet ASTM C1491 requirements for freeze thaw durability. Verify your block weights before using the Unirac U-builder online design tool

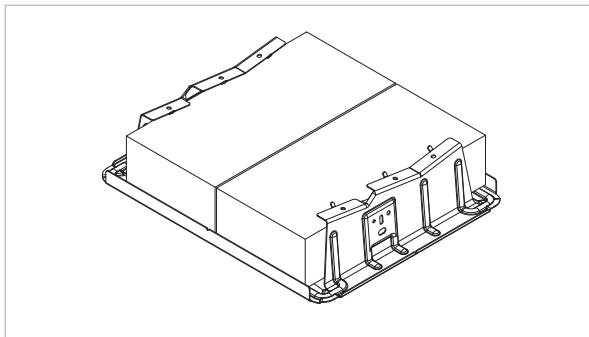


**VALLEY BALLAST BLOCK:** The Valley ballast bay can fit up to 2 standard 4"x8"x16" solid concrete cap blocks. Block weight can range from 26 – 38 lbs and shall meet ASTM C1491 requirements for freeze thaw durability. Verify your block weights before using the Unirac U-builder online design tool.

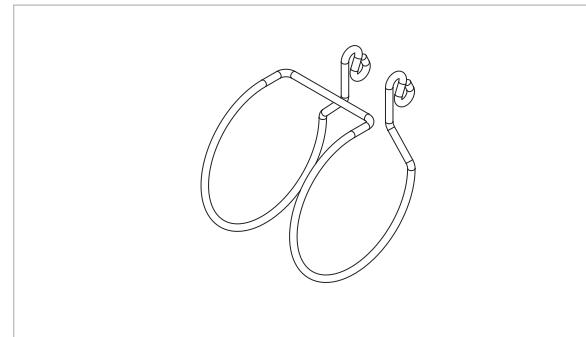

**OPTIONAL WIRE MANAGEMENT:** Custom Unirac wire clip along with mounting options for various off the shelf wire management clips.


**NOTE: All conduit and wire ways should be grounded & bonded per the (NEC) National Electric Code.**

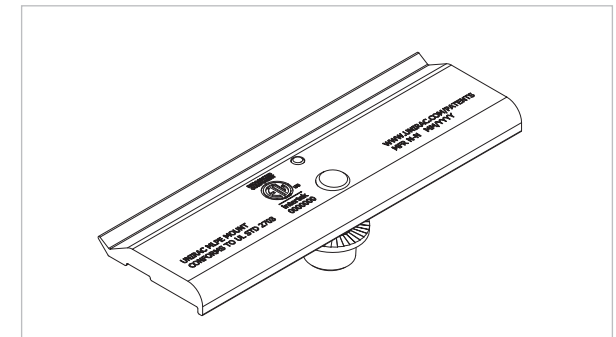

**OPTIONAL MICROINVERTER MOUNTING:** Microinverter / Power optimizer bracket, see page 10 for additional instructions.

### PART NUMBER DATA


| S.No. | Part Number | Part Description                |
|-------|-------------|---------------------------------|
| 1     | 310801      | RMDT RIDGE BAY                  |
| 2     | 310802      | RMDT VALLEY BAY                 |
| 3     | 310804      | RMDT RIDGE BAY, PVC             |
| 4     | 310805      | RMDT VALLEY BAY, PVC            |
| 5     | 310823      | RMDT MIDCLAMP 46-50MM           |
| 6     | 310824      | RMDT MIDCLAMP 41-45MM           |
| 7     | 310825      | RMDT MIDCLAMP 36-40MM           |
| 8     | 310826      | RMDT MIDCLAMP 30-35MM           |
| 9     | 310820      | RM5/DT ENDCLAMP 30-40MM         |
| 10    | 310821      | RM5/DT ENDCLAMP 41-45MM         |
| 11    | 310822      | RM5/DT ENDCLAMP 46-50MM         |
| 12    | 310850      | RM5/DT WIRE MGMT CLIP           |
| 13    | 310851      | RM5 WD WIRE MGMT CLIP           |
| 14    | 310860      | RM5/DT 1/4-20 CLIP U-NUT SS18-8 |
| 15    | 310882      | RM5/DT H-ATTACHMENT KIT         |
| 16    | 008114M     | MLPE MOUNT ASSY                 |
| 17    | 205000S     | ENPHASE ENGAGE CABLE CLIP       |
| 18    | 008002S     | GROUND WEEBLUG #1               |
| 19    | 008009P     | ILSCO LAY IN LUG (GBL4DBT)      |
| 20    | 310999      | FLASHLOC RM KIT                 |

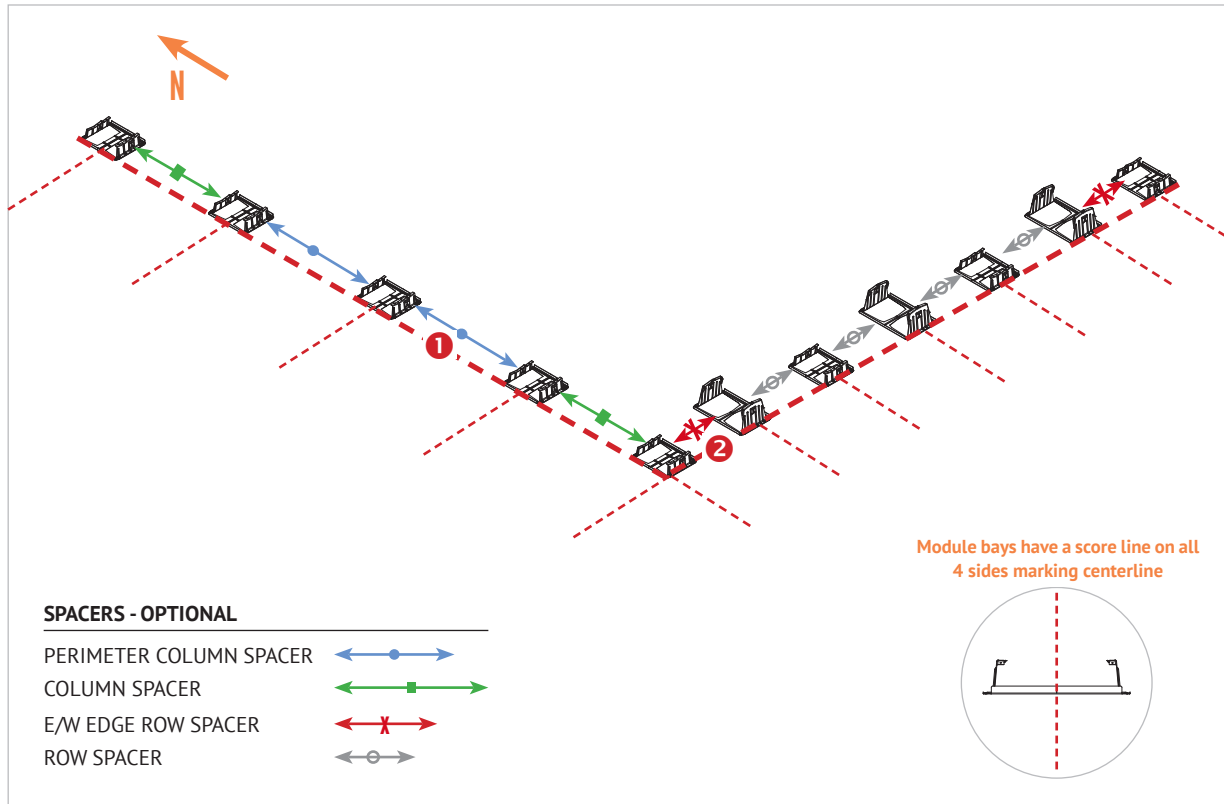


**1 2 SNAP WEST PERIMETER CHALK LINE, THEN NORTH OR SOUTH PERIMETER CHALK LINE.** As best practice, mark lines on perimeter chalk lines to locate center of bays

**PLACE WEST PERIMETER BAYS FIRST, THEN NORTH OR SOUTH PERIMETER BAYS.** If slip sheets are required, place per manufacturer recommendations.

**NOTE:** Custom spacers can be made to aid in the placement of bays on the roof. See page 1

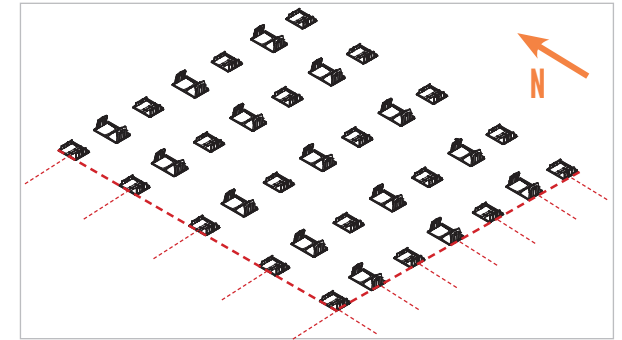

FILL IN BAYS

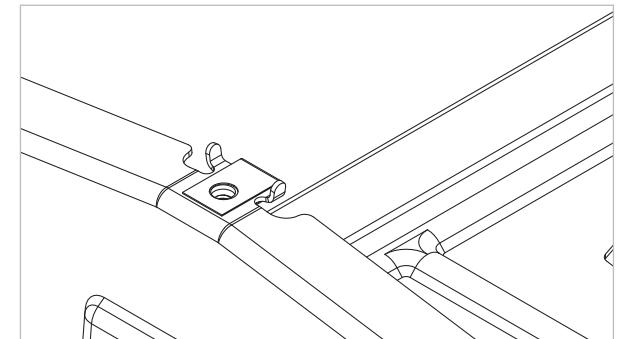


**INSTALL U-NUT** It is recommended to install u-nuts prior to placing ballast blocks & modules on the bays.



**NOTE: U-NUT - Single Use Only - Do not re-torque once fully seated**

**NOTE:** If mechanical attachment is required, place prior to installation of modules.







**PLACE ALL BALLAST:** A maximum of 2 ballasts can be placed in valley bay, and up to 5 ballasts can be placed in the ridge. Site specific ballast calculations should be created for each individual project in accordance with the U-Builder design software. This system has been rated for the mechanical load provisions of UL2703. In addition, it has been designed and tested to comply with the more rigorous requirements of SEAOC PV1, PV2 and ASCE 7.

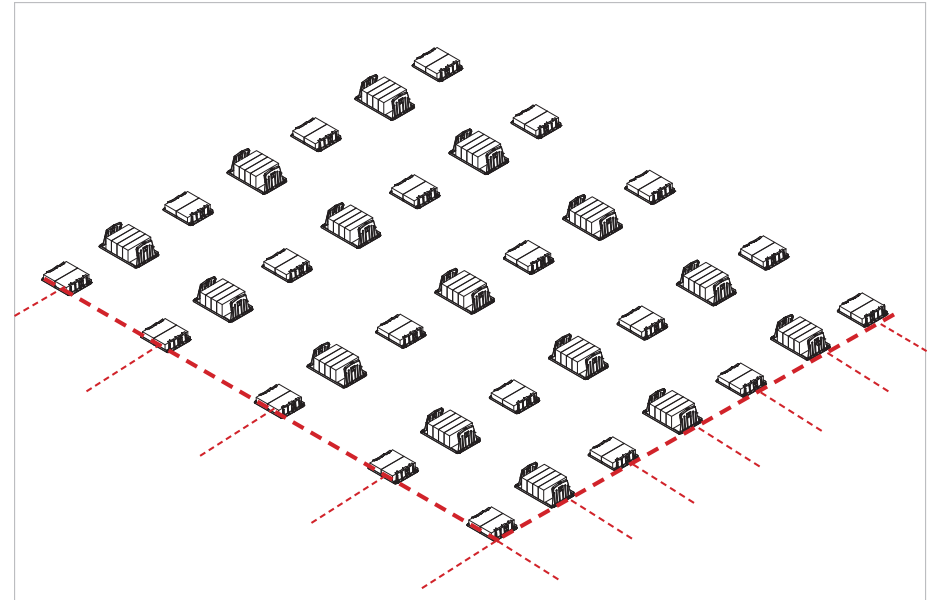

### VALLEY BALLAST BLOCK OPTIONS:

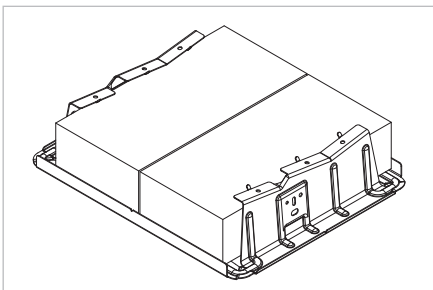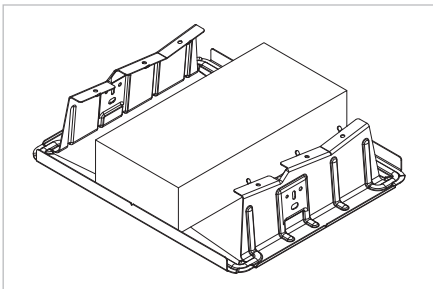

### RIDGE BALLAST BLOCK OPTIONS:

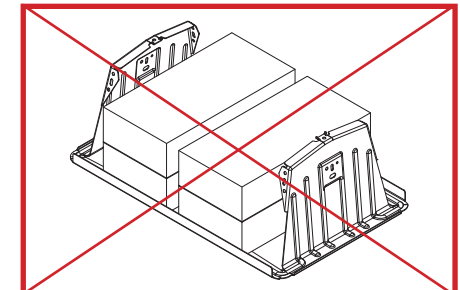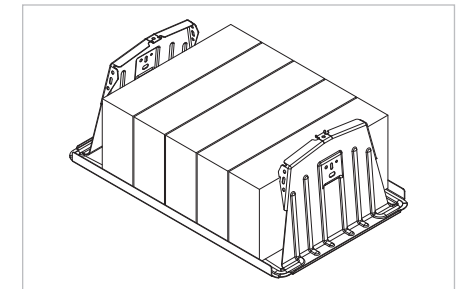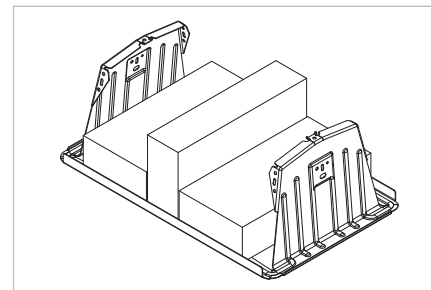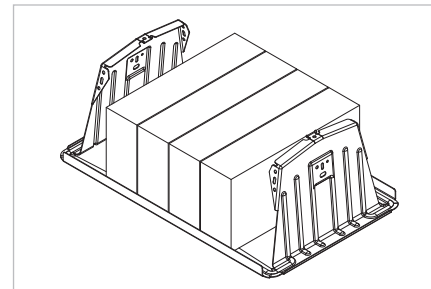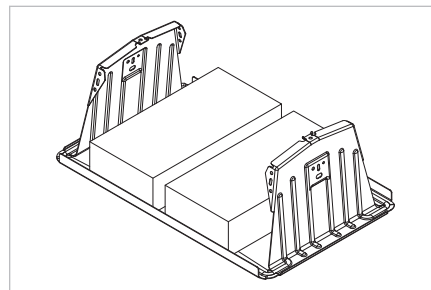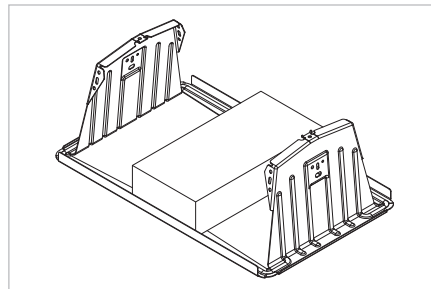




# RMDT

# MODULE PLACEMENT & ATTACH CLAMPS


6

INSTALLATION GUIDE | PAGE

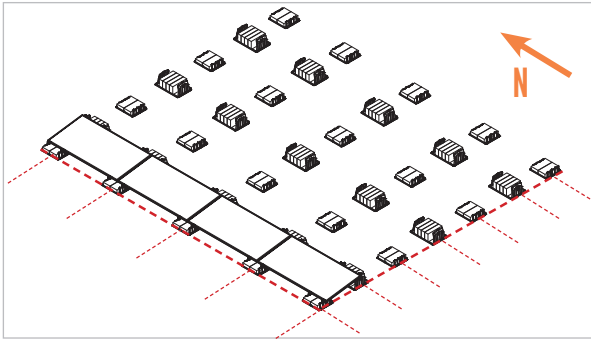

**WESTERN EDGE MODULE PLACEMENT.** Tabs on valley and ridge bay provide mechanical stop and aid in proper spacing at ridge. Rows of modules must be wired together at this time. See page 8 for wire management options.


**NOTE:** Modules may be placed on bays without immediate installation of clamps. Column Spacing: 1 inch maximum gap between modules / ¼ inch minimum gap between modules.

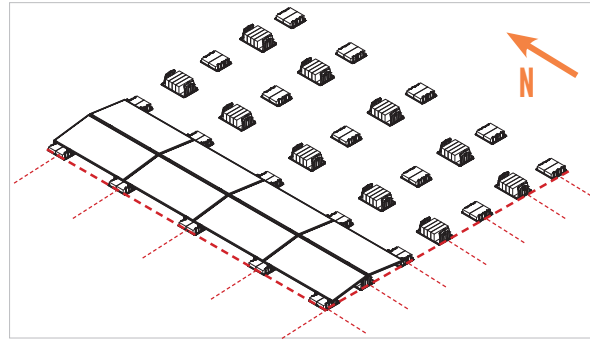

**EAST OR WEST EDGE MODULE PLACEMENT.** Rows of modules must be wired together at this time. See page 8 for wire management options.

**NOTE:** Clamps should be installed for each East/West pair of rows after wiring has been completed.

**NOTE:** Wiring, wire management, and electrical QC should be done as each row is built.

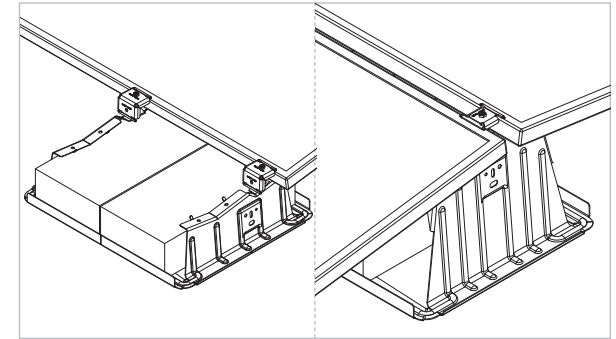


## INSTALL CLAMPS

**NOTE:** U-NUT - Single Use Only - Do not re-torque once fully seated


**NOTE:** CLAMP AND BOLT - Single Use Only - Do not re-torque once fully seated

**TORQUE VALUE:** 7FT-LBS to achieve UL2703 required clamp load

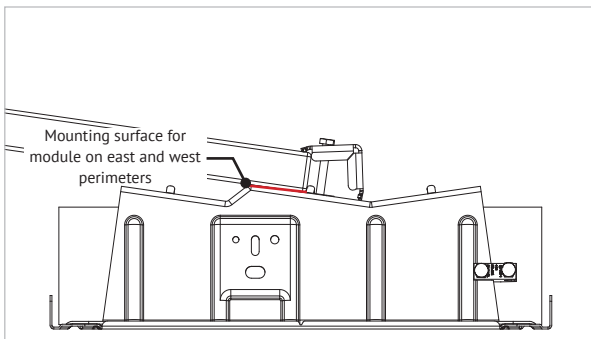


## PROPER VALLEY BAY ORIENTATION AT EAST AND WEST PERIMETERS:

- Valley bays are designed to tuck up underneath the modules for east and west perimeters
- Bent tabs on all mounting surfaces act as a mechanical stop for the modules

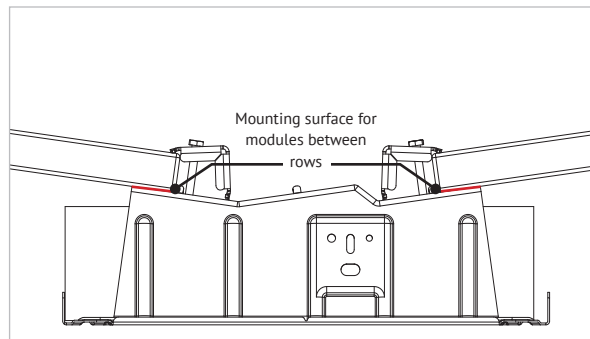


## PROPER INTER-ROW SPACING:

- Inter row spacing at the valley is designed to provide an 8" space for walkways
- Bent tabs on all mounting surfaces act as a mechanical stop for the modules

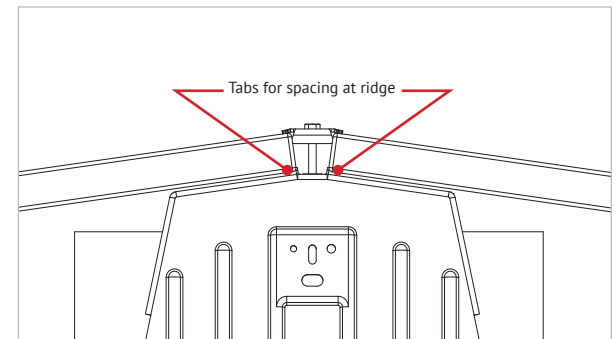


## CLOSE UP MOUNTING AT RIDGE:

- Bent tabs on the mounting surfaces aid in setting the correct gap between modules at the ridge

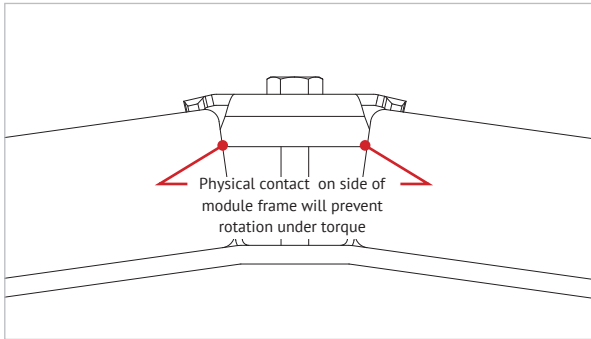


### PROPER MID CLAMP INSTALLATION

- The top of the clamp is stamped for module frame height.
- Clamp should be firmly held against module frame while being torqued.

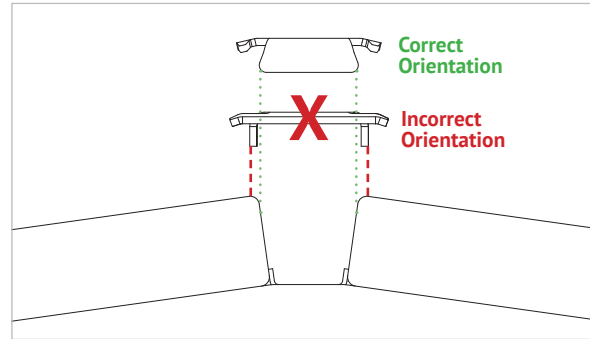


### PROBLEM – CLAMP NOT ORIENTED CORRECTLY

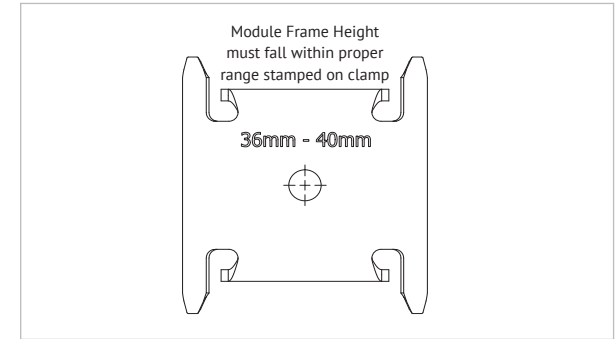


### PROBLEM – NOT USING PROPER SIZE OF CLAMP FOR MODULE FRAME HEIGHT

- Double check the stamping on clamp to use the correct leg of clamp for module frame height
- The module height shall fall within the range shown on the top of the clamp

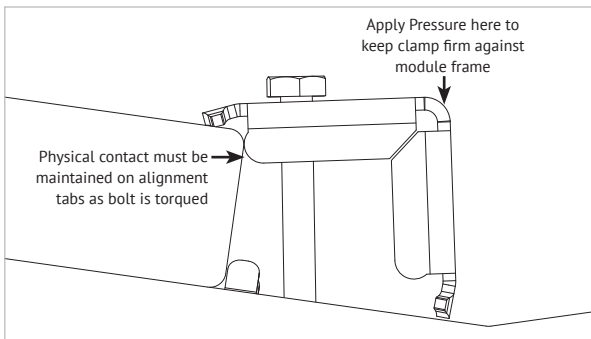


### PROPER CLAMP INSTALLATION:

- Clamp is stamped for module frame height on each leg
- Clamp should be firmly held against module frame while being torqued

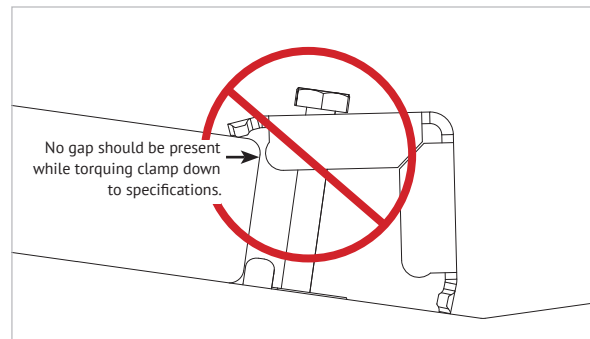


### PROBLEM – CLAMP NOT SEATED AGAINST MODULE DURING TORQUING

- Clamp needs to be held securely against the module frame during torquing for proper installation

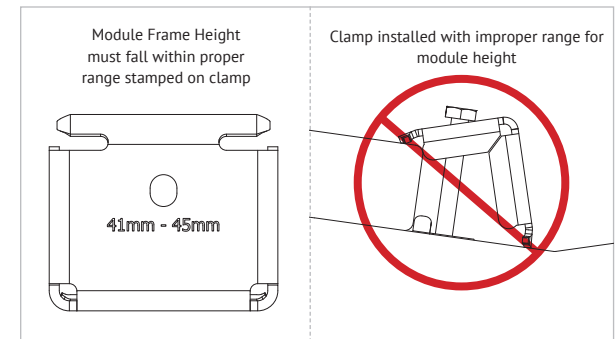


### PROBLEM – NOT USING PROPER SIZE OF CLAMP FOR MODULE FRAME HEIGHT


- Double check the stamping on clamp to use the correct leg of clamp for module frame height
- The module height shall fall within the range shown on the top of the clamp
- Excessive angle on clamp will inhibit required clamp load on module

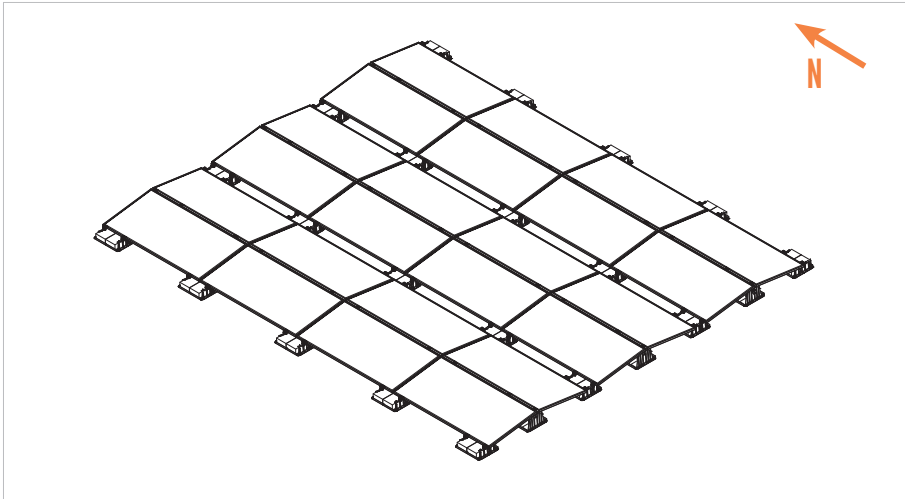


**FILL IN ALL MODULES.** Wire each row as modules are installed, and secure the modules in place after each east/west row pair is complete.

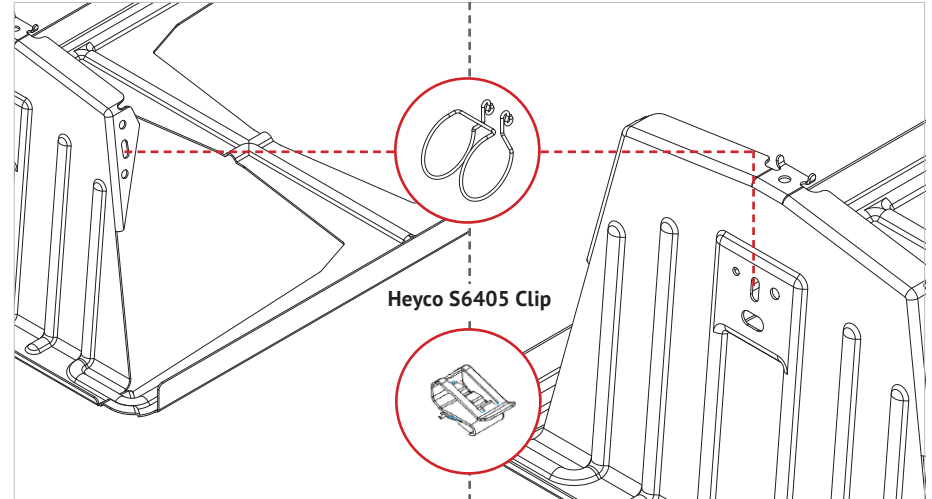


**WIRE MANAGEMENT:** Unirac provides a custom clip for wire management. Additional holes are included in the bay to accommodate other off the shelf wire management clips.

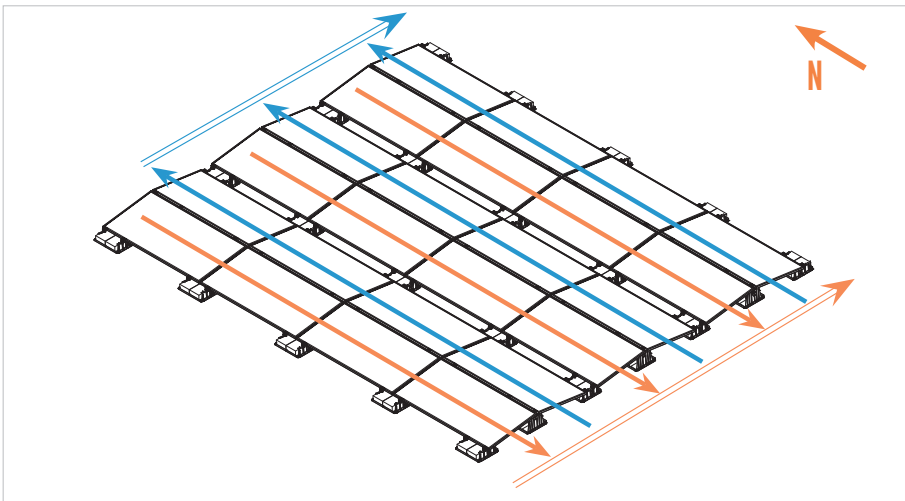

**WIRE MANAGEMENT OPTION 1:** Wire and bundle all east facing modules, run east facing bundle down north perimeter (or south perimeter) and vice versa for all west facing modules

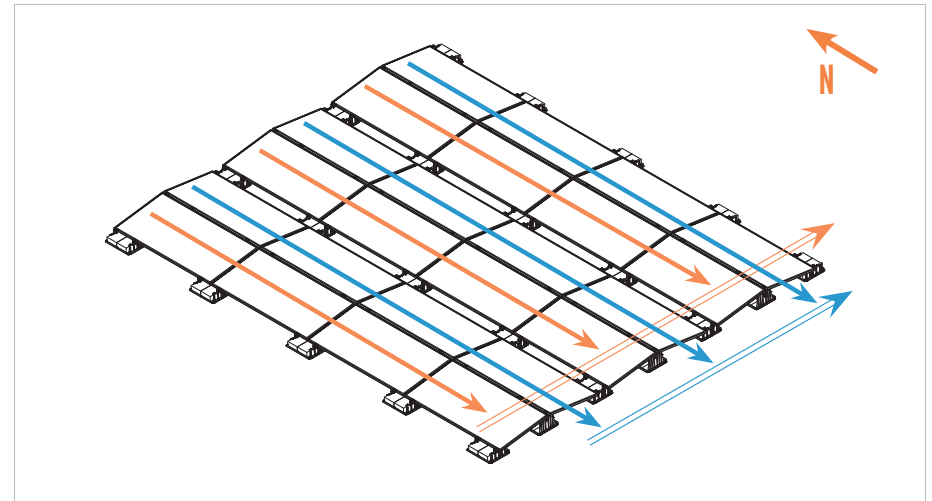


**WIRE MANAGEMENT OPTION 2:** Wire and bundle all east facing modules, wire and bundle all west facing modules. Run bundles along north or south perimeter

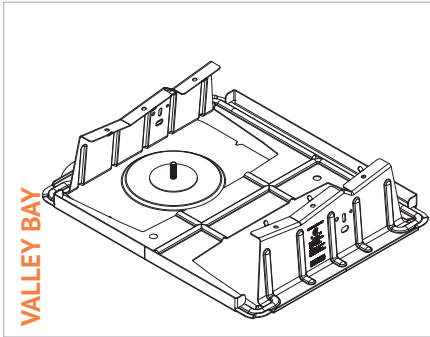


**STEP 1 - POSITION U-ANCHOR:** Position U-Anchor under bay requiring attachment and install according to manufacturer installation instructions.


**NOTE:** Position attachment so that it is close to center of the bay as possible.

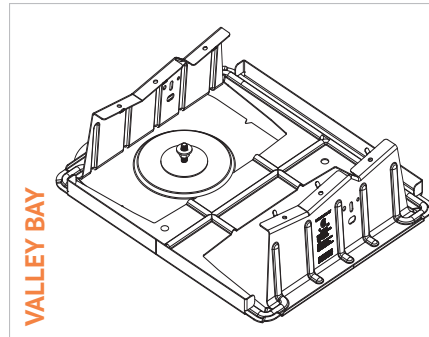

**PLACE NUT AND WASHER:** Include the nut and washer on the anchor stud prior to placing the stud through the strut.

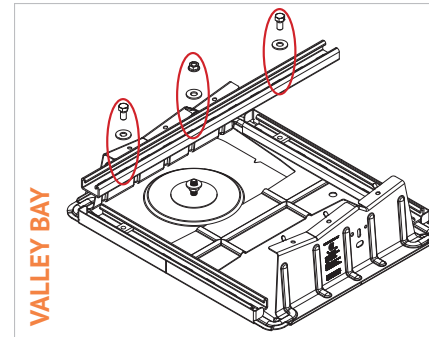

**STEP - 3 PLACE H-STRUT:** Position H-strut sections on bay as pictured above. Align the cross-strut with the anchor's stud. Connect side strut sections to cross strut using a strutnut, bolt, and washer as pictured.

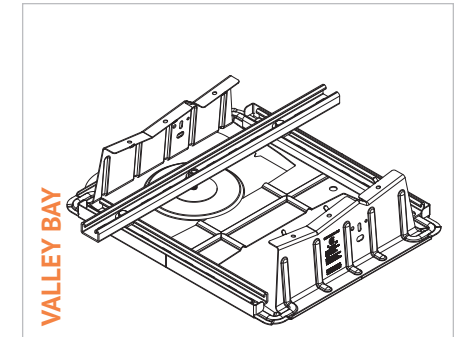

**STEP 4 - SECURE H-STRUT TO U-ANCHOR:** Place 3/8" washer and 3/8-16 serrated flange nut on anchor stud, serrations facing down and tighten to 30 ft-lb.

**TORQUE VALUE: 30FT-LBS**




# RMDT MICROINVERTER INSTALL & WIRE MGMT.

INSTALLATION GUIDE - SUPPLEMENT

10

PAGE

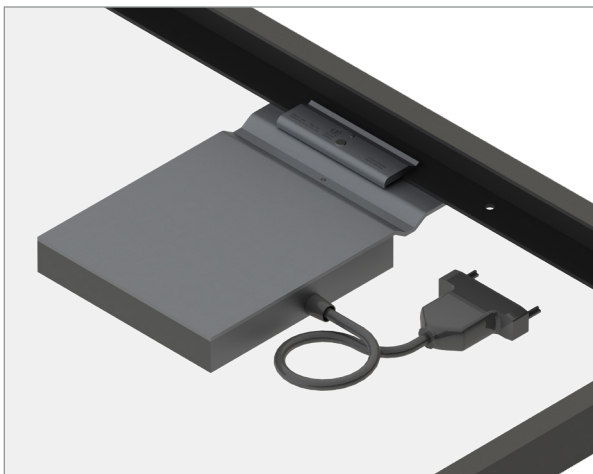

**PRE-INSTALL MICROINVERTERS:** Install MLPE in a location on the module that will not interfere with ballast bays or grounding lugs. To use trunk cable most efficiently, install MLPE components in the same locations on all modules in the same row.

**TORQUE VALUE: 20FT-LBS**



**GROUNDING LUG MOUNTING DETAILS AS REQUIRED BY CODE & ENGINEER OF RECORD:** The IlSCO lug has a green colored set screw for grounding indication purposes. One lug is recommended per continuous array, not to exceed 150ft X 150ft.




Unirac ROOFMOUNT is intended to be used with PV modules that have a system voltage less than or equal to that allowable by the National Electric Code (NEC). It is the installer's responsibility to check adherence to local codes.

**NOTE:** The installation must be conducted in accordance with the National Electric Code ANSI / NFPA 70.

| Ground Lug      | Bolt Size | Torque Value           |
|-----------------|-----------|------------------------|
| IlSCO Lug SGB-4 | 1/4"-20   | 6.5 ft-lbs (75 in-lbs) |
| IlSCO Lug GBL-4 | #10-32    | 2.9 ft-lbs (35 in-lbs) |
| Wiley 6.7       | 1/4"-20   | 10 ft-lbs (120 in-lbs) |

**NOTE:** In order to prevent corrosion induced by dissimilar metals, it is important to verify that the bare copper wire does not come into contact with aluminum or galvanized steel. These materials must be kept separate.


Although conformance with UL2703 was demonstrated without the use of oxide inhibitor material, it is recommended by IlSCO to provide an optimized bonding solution for their lay-in lug.

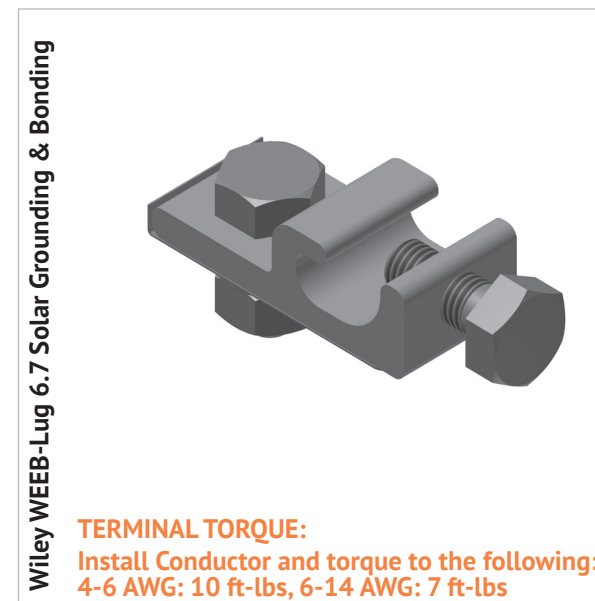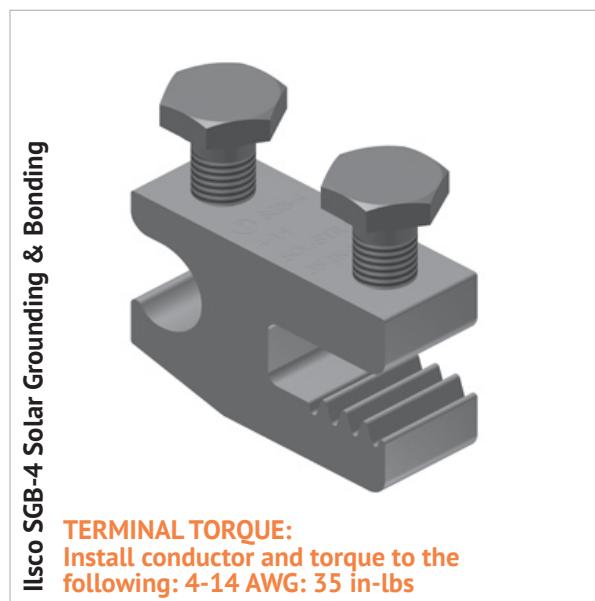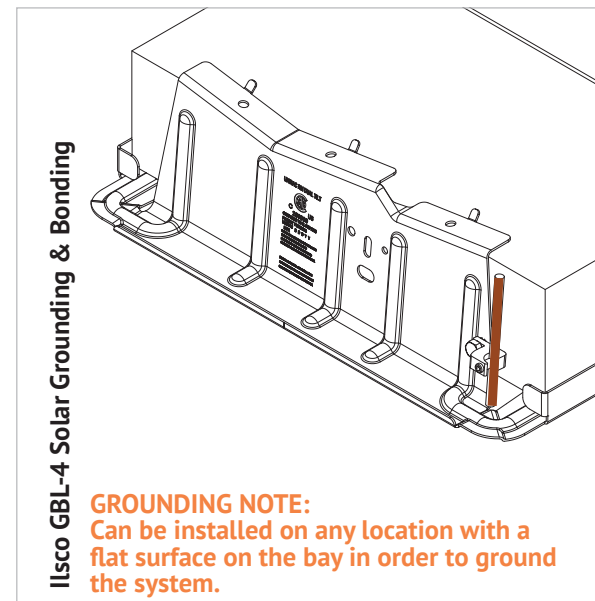


**Note:**

In order to avoid the need for utilizing bonding jumpers during maintenance or module removal do not attach the ground lug to a:

1. valley bay with less than two modules
2. ridge bay with less than three modules

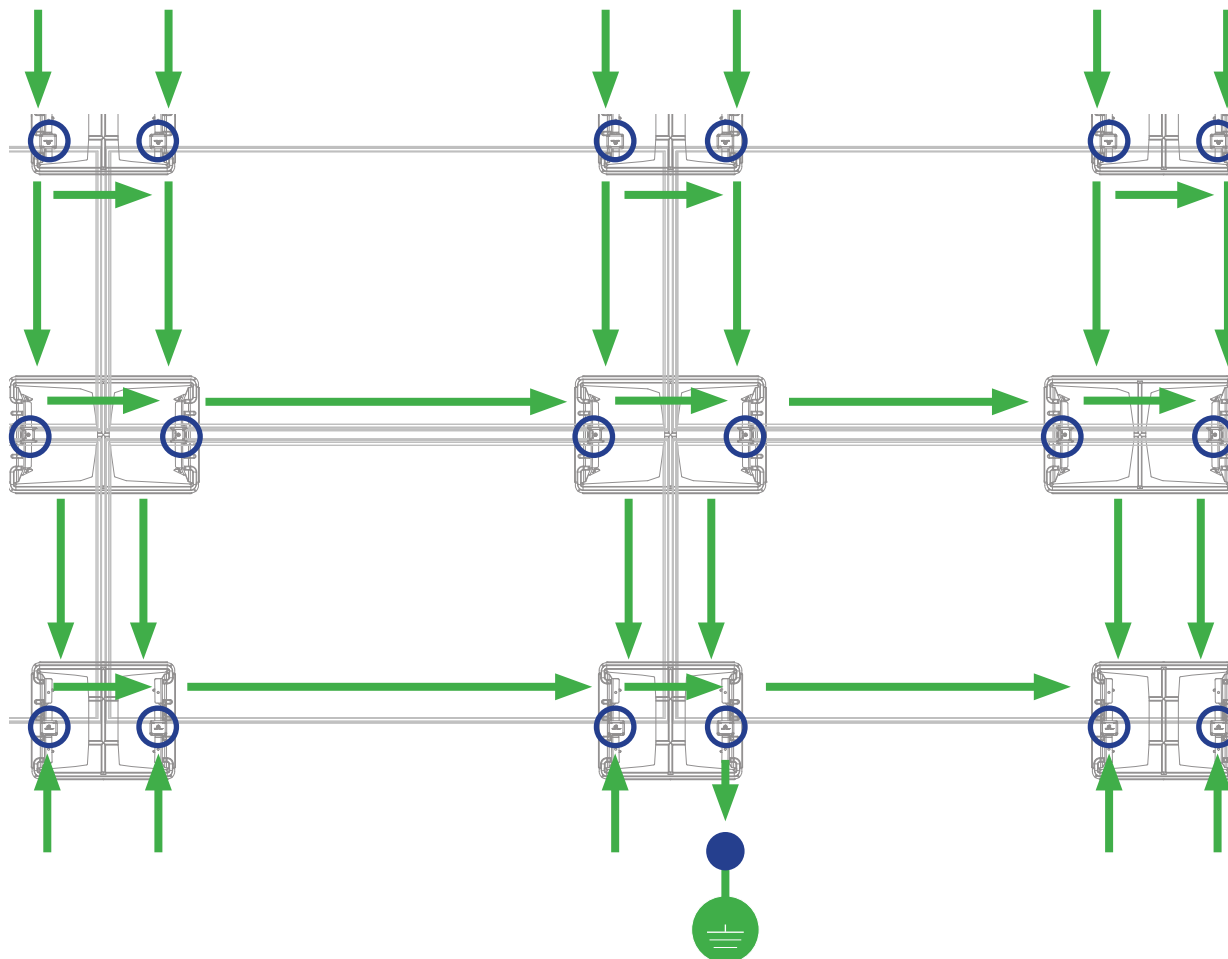

Module Frame  
Module Bay w/ Grounding Clips

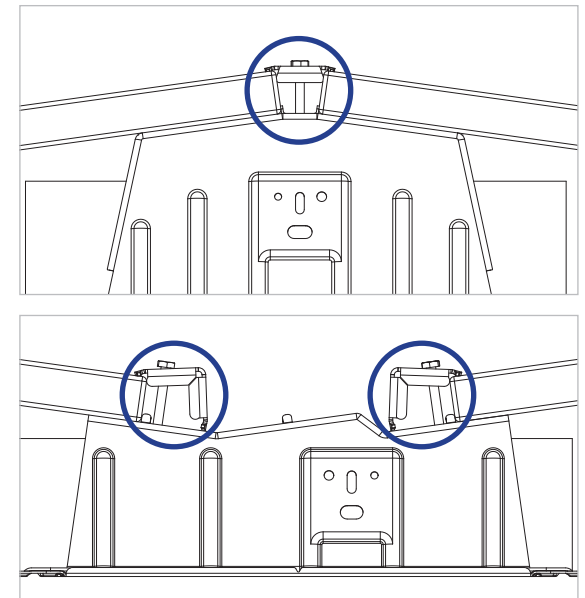


**TEMPORARY GROUNDING & BONDING PROCEDURE:** Periodic inspections should be conducted on the PV array to ensure there are not loose components, loose fasteners or corrosion. If any of the above items are found, the affected components are to be immediately replaced.


**NOTE:**

- If a module must be removed or replaced, a temporary bonding jumper must be used to ensure safety of the personnel and PV system.
- Removing a PV module from a system is not considered to be routine maintenance. This type of activity should only be performed by trained and qualified installers.
- In order to prevent corrosion induced by dissimilar metals, it is important to verify that the bare copper wire does not come into contact with aluminum or galvanized steel. These materials must be kept separate.


APPROVED LUGS and Terminal Torque see page 11

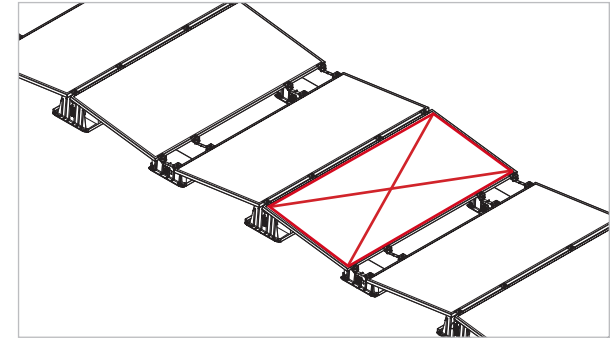

**BONDING JUMPER REQUIRED:** One example of a module removal that will require the use of a bonding jumper

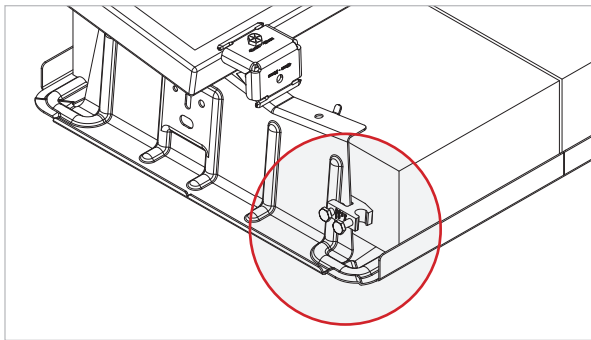


**ATTACH LUGS:** Use approved lug(s) to install on adjacent bays where the module is being removed.

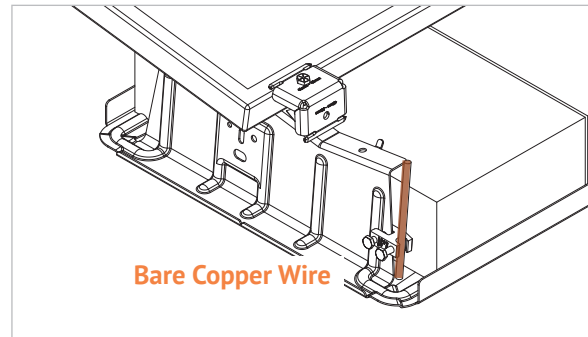

**INSERT COPPER WIRE:** Insert bare copper wire into each lug, providing a bonding jumper across the missing module location.

Remove module & reverse the operation after maintenance is complete

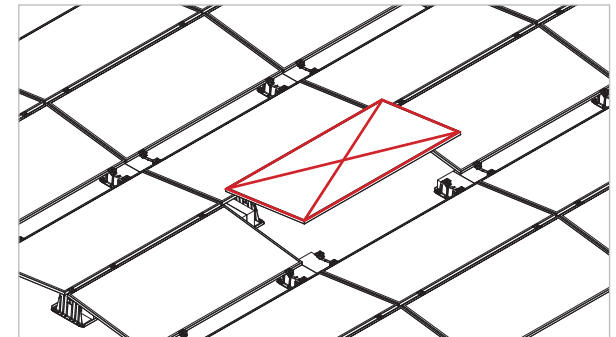

**BONDING JUMPER NOT REQUIRED,** due to integrated bonding/grounding path throughout module frames/ bays around this location.

**NOTE: CLAMP AND BOLT - Single Use Only - Use new clamps after any module replacements or system maintenance.**


**SYSTEM LEVEL FIRE CLASSIFICATION:** The system fire class rating is only valid when the installation is conducted in accordance with the assembly instructions contained in this manual. RM ROOFMOUNT has been classified to the system level fire portion of UL2703. It has achieved Class A performance for low sloped roofs when used in conjunction with type 1, 2, 29 and 30 module constructions. Please see the specific conditions below for mounting details required to maintain the Class A fire rating. Minimum and maximum roof slopes are restricted through the system design and layout rules. The fire classification rating is only valid on roof pitches less than 2:12 (slopes < 2 inches per foot, or 9.5 degrees).

**NOTE:** Type 1, 2, 29, and 30 information is generally located on back of modules or through manufacturers documentation. Some building codes and fire codes require minimum clearances around such installations, and the installer should check local building code requirements for compliance.

| Module Type | System level Fire Rating | Mitigation                     |
|-------------|--------------------------|--------------------------------|
| Type 1      | Class A                  | None Required / No Limitations |
| Type 2      | Class A                  | None Required / No Limitations |
| Type 29     | Class A                  | None Required / No Limitations |
| Type 30     | Class A                  | None Required / No Limitations |

### TYPE 1, 2, 29, and 30 CLASS A FIRE RATING MOUNTING ORIENTATION

Unirac RM Dual tilt has achieved Class A system level fire performance for type 1 and type 2 module constructions. There are no provisions necessary in order to meet Class A requirements for this product.

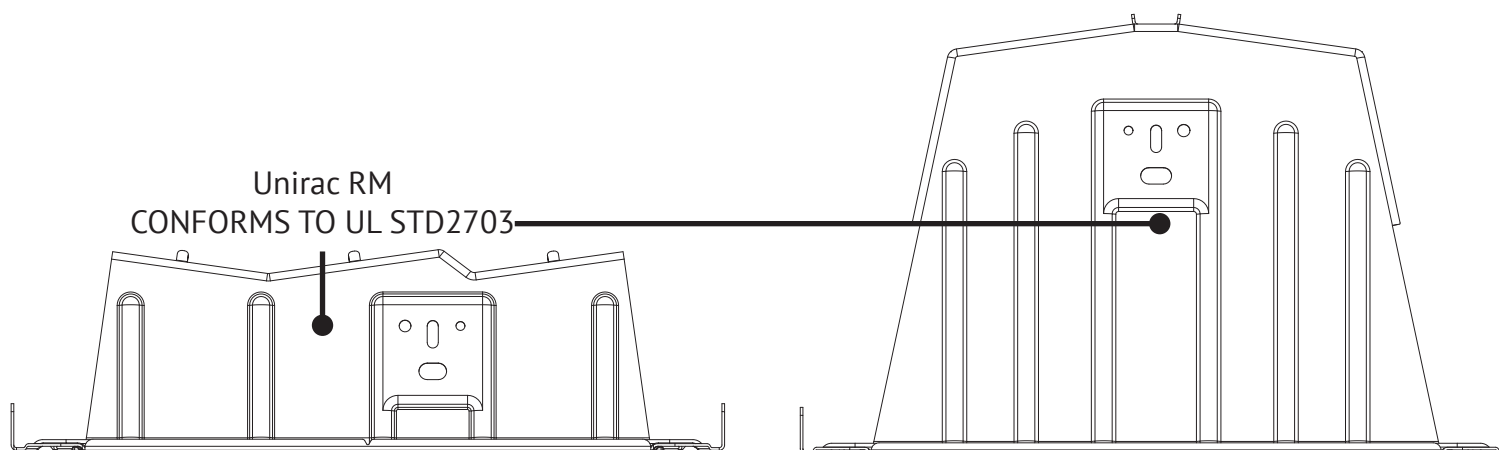

## MECHANICAL LOAD TEST

The Unirac RM system has been tested to the mechanical load provisions of UL2703 and covers the following basic parameter(s):

- Test Loads = 1.5 x Design Loads
- PV modules may have a reduced load rating, independent of the RM5 load rating. Please consult the PV module manufacturer's installation guide for more information.

## TESTED MODULES

| Module Manufacturer | Model / Series  | Area (sq ft) | Standard Installation Configuration - No Mid Bay |                        | Installed with Additional Bay at Modules North/South Center |                        |
|---------------------|-----------------|--------------|--------------------------------------------------|------------------------|-------------------------------------------------------------|------------------------|
|                     |                 |              | Up Design Load (psf)                             | Down Design Load (psf) | Up Design Load (psf)                                        | Down Design Load (psf) |
| Jinko               | JKMxxxM-72HL4-V | 27.8         | 17.24                                            | 36.20                  | Not Tested                                                  | Not Tested             |
| Canadian Solar      | CS7N-xxxMB-AG   | 33.4         | 15.67                                            | 14.85                  | 23.52                                                       | 33.33                  |

### NOTE:

All installation configurations have achieved a minimum of 5psf design load in the downslope direction.

**ELECTRICAL BONDING & GROUNDING TEST MODULES:** This racking system may be used to ground and/or mount a PV module complying with UL1703 or UL61730 only when the specific module has been evaluated for grounding and/or mounting in compliance with the included instructions.

| Manufacture  | Module Model / Series                                                                                                                                                                                       | Manufacture    | Module Model / Series                                                                                                                                                                                                                                                                                                                       | Manufacture           | Module Model / Series                                                                                                                                                                    |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Aionrise     | AION60G1, AION72G1                                                                                                                                                                                          | Axitec         | AXIpremium XL HC: AC-xxxMH/120(S/V)<br>AC-xxxTGB/144WS-US<br>AC-xxxTGB/96BB<br>AC-xxxTGB/108BB                                                                                                                                                                                                                                              | Canadian Solar(Cont.) | CS6X-P, CS7L-MB-AG CS6.1-54TM-H<br>CS7L-MB-AG<br>CS7L-TB-AG<br>CS7L-xxxMB-AG<br>CS7N-xxxMB-AG<br>CS7N-xxx MS<br>CS7N-xxxTB-AG<br>ELPS CS6(P/A)-MM<br>CS6.2-48TM-xxxH<br>CS6.2-66TB-xxxHR |
| Aleo         | P18 & P19<br>S18, S19, S59, & S79                                                                                                                                                                           | Bluesun Solar  | BSMxxxM10-72HBD                                                                                                                                                                                                                                                                                                                             | Centrosolar America   | C-Series<br>E-Series                                                                                                                                                                     |
| AMPS         | AMPS-xxxN-108BB<br>AMPS-xxxP-54BB                                                                                                                                                                           | Boviet Solar   | BVM6610<br>BVM6610M-xxxS-H-HC<br>BVM6610M-xxxS-H-HC-BF<br>BVM6612<br>BVM6612M-XXXS-H-HC-BF-DG<br>BVM7612M-H-HC-BF-DG                                                                                                                                                                                                                        | CertainTeed           | CT54M10XXX-N07<br>CT72M10XXX-N07<br>CTM10400HC11-06<br>CTM10400HC11-08<br>CTM10400HC11-09<br>CTTCxxxHC12-08<br>CTxxxHC11-06<br>CTxxxMxx-(01/02/03/04)<br>CTxxxPxx-01                     |
| Aptos Solar  | DNA-108-(MF/BF)10-xxxW<br>DNA-120-(MF/BF)10-xxxW<br>DNA-120-(MF/BF)26<br>DNA-120-MF10<br>DNA-144-(MF/BF)26<br>DNA-144-BF10-xxxW-DG                                                                          | BYD            | P6K Series, MHK                                                                                                                                                                                                                                                                                                                             | Eco Solargy           | Orion 1000 & Apollo 1000                                                                                                                                                                 |
| Astronergy   | ASM6612P Series<br>CHSM6610(P/M)/HV<br>CHSM6612(P/M)/HV<br>CHSM66M(DG)/F-BH<br>CHSM72(P/M)-HC<br>CHSM72M(DG)/F-BH<br>CHSM72M(DG)/F-BH (Fire Type 29 only)<br>CHSM72N(DG)/F-BH (Fire Type 29 only)           | Canadian Solar | CS1(K/H/U/Y)-MS<br>CS3(U/K)-MB-AG<br>CS3K-(MB/MS/P/PB)<br>CS3L-(P/MS)<br>CS3N-MS<br>CS3U-(MB/MS/P/PB/PB-AG)<br>CS3W-(MB-AG/MS/P/P-PB-AG)<br>CS3Y-MB-AG<br>CS5A-M<br>CS6.1-60TM-H<br>CS6.1-72TB-H<br>CS6.2-66TB-xxxH<br>CS6K-(M/MS/P)<br>CS6P-(M/P)<br>CS6R-MS<br>CS6R-xxxMS-HL<br>CS6U-(M/P)<br>CS6V-M<br>CS6W-(MB-AG/MS)<br>CS6W-xxx-TB-AG | EMMVEE                | ExxxHCBT144-T<br>Titanium Clear                                                                                                                                                          |
| AU Optronics | PM Series                                                                                                                                                                                                   |                |                                                                                                                                                                                                                                                                                                                                             | Energy America        | ZLK-xxx                                                                                                                                                                                  |
| Auxin        | AXN10Mxxx<br>AXN6M610T<br>AXN6M612T<br>AXN6P610T<br>AXN6P612T<br>AXNG1M SERIES                                                                                                                              |                |                                                                                                                                                                                                                                                                                                                                             | ET Solar              | ETAC & ET Modules<br>ET-M672BHxxxTW<br>ET-M772BH520-550WW/WB<br>ET-M772BHxxxTW/TB<br>ET-N772TBHxxxGL                                                                                     |
| Axitec       | AC-xxx(M/P)/(60/72)(S/V)<br>AC-xxxP/156-60S<br>AC-xxxTGB/144TS<br>AXIblackpremium X HC: AC-xxxMH/(120/144)(SB/VB)<br>AXIblackpremium XL HC: AC-xxxMH/120(SB/VB)<br>AXIpremium X HC: AC-xxxMH/(120/144)(S/V) |                |                                                                                                                                                                                                                                                                                                                                             | Fellow Energy         | FE72-18X(ND)                                                                                                                                                                             |
|              |                                                                                                                                                                                                             |                |                                                                                                                                                                                                                                                                                                                                             | Flextronics           | FXS                                                                                                                                                                                      |

- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID

**ELECTRICAL BONDING & GROUNDING TEST MODULES:** This racking system may be used to ground and/or mount a PV module complying with UL1703 or UL61730 only when the specific module has been evaluated for grounding and/or mounting in compliance with the included instructions.

| Manufacture     | Module Model / Series                                                                                                                                                                                     |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Freedom Forever | FF-MP-BBB-xxx<br>FF-MP1-BBB-xxx                                                                                                                                                                           |
| FreeVolt        | PVGraf                                                                                                                                                                                                    |
| GCL             | GCL-P6 & GCL-M6 Series                                                                                                                                                                                    |
| Gstar Solar     | GSD7S54T-xxxBT<br>GSP7G54M(H)                                                                                                                                                                             |
| Hansol          | TD-AN3, TD-AN4,<br>UD-AN1 & UB-AN1                                                                                                                                                                        |
| Hanwha SolarOne | HSL 60 & HSL 72                                                                                                                                                                                           |
| Heliene         | 132HC M10 SL Monofacial Module<br>144HC M10 NTYP SL Bifacial Module<br>144HC M10 SL Bifacial<br>144HC M6<br>156HC M10 NTYP SL Bifacial Module<br>156HC M10 SL Bifacial<br>36M, 60M, 60P, 72M & 72P Series |
| HT-SAAE         | HT60-156M-C, HT60-156M(V)-C, HT72-166M<br>HT72-18X<br>HT72-156(M/P), HT72-156P-C, HT72-156P(V)-C<br>HT72-18X(ND)-F                                                                                        |
| Hyperion Solar  | HY-DH108P8(B)<br>HY-DH108N8B<br>HY-DH144P8<br>HY-DH156N8<br>HY-DH156P8                                                                                                                                    |

| Manufacture              | Module Model / Series                                                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Hyundai                  | HiN-SxxxXG(BK)<br>HiN-TxxxNF(BK)<br>HiN-TxxxNI<br>HiN-TxxxNJ<br>HiN-TxxxOJ<br>HiS-SxxxOJ<br>HiS-SxxxXG(BK)<br>HiS-SxxxYH(BK)<br>HiS-TxxxNJ |
| Hyundai Heavy Industries | MG, TG, RG, KG, MI, RI, KI, HI & TI Series<br>HiA-SxxxHG, HiD-SxxxRG(BK), HiS-S400PI                                                       |
| Illuminate USA           | IL5-72HBD-xxx M<br>IL8-66HGD-xxx M                                                                                                         |
| Imperial Star            | ISM7-SHDD108-400/M                                                                                                                         |
| INDEPWR Solar            | iPWR-M10-54BX2S-xxxW<br>iPWR-M10-60BX2S-xxxW                                                                                               |
| Inxeption                | mSolar 108BB HC Series (TXI10-xxx108BB)<br>mSolar 144BB HC Series (TXS6-xxx144BB)                                                          |
| ITEK                     | iT, iT-HE & iT-SE Series                                                                                                                   |
| Japan Solar              | JPS-60 & JPS-72 Series                                                                                                                     |

| Manufacture | Module Model / Series                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| JA Solar    | JAM54S30 xxx/MR<br>JAM54S31 xxx/MR<br>JAM66D45 LB<br>JAM72D10 xxx/MB<br>JAM72D30MB<br>JAM78D10MB<br>JAM72S30 /MR<br>JAM72D40 xxx/MB<br>JAM72S30 /MR<br>JAP6-60, JAM6-60<br>JAP6-72, JAM6-72<br>JAP6(k)-60-xxx/4BB, JAP60S##-xxx/**<br>JAM6(k)-60-xxx/**, JAM60S##-xxx/**<br>JAP6(k)-72-xxx/4BB, JAP72S##-xxx/**<br>JAM6(k)-72-xxx/**, JAM72S##-xxx/**<br>i. ##: 01, 02, 03, 09, 10<br>ii. **: SC, PR, BP, HiT, IB, MW, MR<br>** = Backsheet, ## Cell technology |
| Jinko Solar | K07(A/B)<br>JKMSxxx(P/PP)-60, JKMSxxxPP-60B-J4<br>JKMSxxx-72, JKMSxxx(P/PP)-72<br>JKMSxxxM-60<br>JKMxxx(M/PP)-72-V, JKMxxxPP-72(Plus)<br>JKMxxx(M/P/PP)-72, JKMxxx-72L-V<br>JKMxxx(P/PP)-60, JKMxxxPP-60(Plus)<br>JKMxxx(P/PP)-72B<br>JKMxxxM-60(B/L/HL/BL/LV)<br>JJKMxxxM-60-V, JKMxxxPP-60B-J4<br>JKMxxxM-6RL3-B<br>JKMxxxM-72HL4-TV<br>JKMxxxM-72HLM-TV                                                                                                      |

- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID

**ELECTRICAL BONDING & GROUNDING TEST MODULES:** This racking system may be used to ground and/or mount a PV module complying with UL1703 or UL61730 only when the specific module has been evaluated for grounding and/or mounting in compliance with the included instructions.

| Manufacture        | Module Model / Series                                                                                                                                                                                                                                                                | Manufacture          | Module Model / Series                                                                                                                                                                                                                                                                                                                         | Manufacture         | Module Model / Series                                                                                                               |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Jinko Solar(Cont.) | JKMxxxM-72L-V, JKMxxxM-72HL(4)-V<br>JKMxxxM-7RL3-TV<br>JKMxxxM-7RL3-V, JKMxxxM-72HBL-V<br>JKMxxxN-54HL4-B<br>JKMxxxN-72HL4-BDV (30mm & 35mm Frame Height)<br>JKMxxxN-72HL4-BDX<br>JKMxxxN-72HL4-TV<br>JKMxxxPP-60B, JKMxxxM-60                                                       | LONGi                | LR4-60(HPB/HIB/HPH/HHI)<br>LR4-72(HPH/HHI), LR5-54-HPB-xxxM<br>LR4-72HBD xxxM<br>LR5-54HABB-xxx M (fire type 29 only)<br>LR5-54HPB-xxx M<br>LR5-54-HPB-xxxM<br>LR5-54HTB xxxM<br>LR5-72HBD xxx M<br>LR6-60, LR6-60(BK/PE/PB/PH/HPB/HIB/HPH/HHI)<br>LR6-72, LR6-72(BK/HV/PE/PB/PH/HPH/HHI)<br>LR7-72HGD-xxx M<br>LR8-54HGBB<br>LR8-66HGD-xxx M | Mitrex              | Mxxx-L3H<br>Mxxx-I3H                                                                                                                |
| Kyocera            | KD-F Series                                                                                                                                                                                                                                                                          |                      |                                                                                                                                                                                                                                                                                                                                               | Mitsubishi          | MJE & MLE Series                                                                                                                    |
| LA Solar           | BLA Model<br>LSxxxBF<br>LSxxxBL<br>LSxxxBL (410 watt)<br>LSxxxHC<br>LSxxxHC (430-450 watt range)                                                                                                                                                                                     | Maxeon               | SPR-MAX3-xxx-COM<br>SPR-MAX3-XXX-R<br>SPR-MAX3-XXX-BLK-R<br>SPR-MAX6-xxx<br>SPR-MAX6-xxx-BLK                                                                                                                                                                                                                                                  | mSolar              | TXI10-xxx108BB                                                                                                                      |
|                    |                                                                                                                                                                                                                                                                                      |                      |                                                                                                                                                                                                                                                                                                                                               | Neo Solar Power Co. | D6M Series                                                                                                                          |
| LG Electronics     | LGxxx(E1C/E1K/N1C/N1K/N2T/N2W/S1C/S2W/Q1C/Q1K)-A5<br>LGxxx(A1C/M1C/M1K/N1C/N1K/Q1C/Q1K/QAC/QAK)-A6<br>LGxxxN2T-B5, LGxxxN1K-B6<br>LGxxx(N1C/N1K/N2T/N2W)-E6<br>LGxxxN2T-J5<br>LGxxx(N1K/N1W/N2T/N2W)-L5<br>LGxxx(M1C/N1C/Q1C/Q1K)-N5<br>LGxxx(N1C/N1K/N2W/Q1C/Q1K)-V5<br>LGxxxN3K-V6 | Meyer Burger         | Meyer Burger Black<br>Meyer Burger White<br>Meyer Burger Glass                                                                                                                                                                                                                                                                                | NE Solar            | NESE xxx-60MH-M6<br>NESE xxx 66MHB-G12<br>NESE xxx-72MHB-M10<br>NESE xxx 72MHT-M10<br>NESE xxx 72THB-M10<br>NESE xxx 72MHB-M10      |
|                    |                                                                                                                                                                                                                                                                                      | Mission Solar Energy | MSE MONO<br>MSE PERC<br>MSExxx(SR8T/SR8K/SR9S/SX5T/SX5K/SX6W)<br>MSExxxHT0B<br>MSExxxSX6Z<br>MSExxxSX9R<br>MSH10-xxxHN4G<br>MSH10-xxxHT4T<br>MSI10-xxxHN4G<br>MSI10-xxxHT4G<br>MSI10-xxxHT4T<br>MSN10xxxHT4T<br>MSX10-xxxHN0B<br>MSExxxSX9Z                                                                                                   | Panasonic           | VBHNxxxSA(15/16)<br>VBHNxxxKA(01/02)<br>VBHNxxxSA17(G/E) & SA18(E)<br>VBHNxxxKA(03/04)<br>EVPVxxx<br>EVPVxxx(H/K/PK/HK/HK2)         |
|                    |                                                                                                                                                                                                                                                                                      |                      |                                                                                                                                                                                                                                                                                                                                               | Peimar              | SGxxxM (FB/BF)<br>SMxxxM                                                                                                            |
|                    |                                                                                                                                                                                                                                                                                      |                      |                                                                                                                                                                                                                                                                                                                                               | Philadelphia Solar  | PS-M108(HCBF)-400W (30 & 35mm frames)<br>PS-M144(HCBF)-xxxW<br>PS-MNB108(HCBF)-xxxW<br>PS-MNB144(HCBF)-xxxW<br>PS-MNB156(HCBF)-xxxW |
|                    |                                                                                                                                                                                                                                                                                      |                      |                                                                                                                                                                                                                                                                                                                                               | Phono Solar         | PSxxxM4(H)-24/TH                                                                                                                    |
|                    |                                                                                                                                                                                                                                                                                      |                      |                                                                                                                                                                                                                                                                                                                                               | Phono Solar Tech.   | Standard Modules                                                                                                                    |
|                    |                                                                                                                                                                                                                                                                                      |                      |                                                                                                                                                                                                                                                                                                                                               | Prism Solar         | P72 Series<br>P72X-xxx                                                                                                              |

- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID

**ELECTRICAL BONDING & GROUNDING TEST MODULES:** This racking system may be used to ground and/or mount a PV module complying with UL1703 or UL61730 only when the specific module has been evaluated for grounding and/or mounting in compliance with the included instructions.

| Manufacture | Module Model / Series                     | Manufacture     | Module Model / Series                                                                                        | Manufacture | Module Model / Series                              |
|-------------|-------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------|-------------|----------------------------------------------------|
| Q Cells     | B.LINE (PLUS/PRO) BFR G4.1                | Q Cells (cont.) | Q.PEAK DUO BLK ML-G10.a+                                                                                     | REC         | PEAK & ECO                                         |
|             | B.LINE PEAK DUO (G7/G7.2)                 |                 | QPEAK DUO G10.C1+ AC                                                                                         |             | RECxxxAA (BLK/Pure/Pure-R/ Pure-RX/ Pure 2/ Pro M) |
|             | B.LINE PEAK DUO L-(G5/G5.1/G5.2/G5.3)     |                 | Q.PEAK DUO ML-G12S.d / BFG                                                                                   |             | RECxxxAA Pure-RX                                   |
|             | B.LINE PEAK DUO L-(G7/G7.1/G7.2/G7.3)     |                 | Q.PEAK DUO XL-(G10/G10.2/G10.3/G10.c/G10.d)                                                                  |             | RECxxxNP (N-PEAK)                                  |
|             | B.LINE PLUS/PRO - L G4.x                  |                 | Q.PEAK DUO XL-G10.3/BFG                                                                                      |             | RECxxxNP2 (Black)                                  |
|             | Q.PEAK DUO (BLK) G5                       |                 | Q.PEAK DUO XL-(G11.2/G11.3)                                                                                  |             | RECxxxNP3 Black                                    |
|             | Q.PEAK DUO (BLK)-G6+                      |                 | Q.PEAK DUO XL (G9/G9.2/G9.3)                                                                                 |             | RECxxxPE, RECxxxPE72                               |
|             | Q.PEAK DUO (BLK)-G7                       |                 | Q.PEAK DUO XL-G10.d/BFG Q.PEAK DUO XL-G11S                                                                   |             | RECxxxTP                                           |
|             | Q.PEAK DUO (BLK) G8(+)                    |                 | Q.PEAK DUO XL-G11.3/BFG                                                                                      |             | RECxxxTP2(BLK2)                                    |
|             | Q.PEAK DUO (BLK) ML-G10.(a)(+)            |                 | Q.PLUS L-G4.2/TAA                                                                                            |             | RECxxxTP2S(B)(XV)                                  |
|             | Q.PEAK DUO (BLK) ML G9(+)                 |                 | Q.PLUS/PEAK/PRO - L G4.x                                                                                     | Renesola    | RECxxxTP3M (Black)                                 |
|             | Q.PEAK DUO (G7/G7.2)                      |                 | Q. PLUS/PRO G3, Q.PLUS BFR G3.1, Q.PRO/PLUS G4                                                               |             | RECxxxTP4 (Black)                                  |
|             | Q.PEAK DUO BLK-G10(+)                     |                 | Q.PRO BFR G4x, Q.PEAK (BLK) G4.1 (TAA/MAX)                                                                   | Risen       | 60 Cell Modules                                    |
|             | Q.PEAK DUO BLK G10+ /AC                   |                 | Q.PRO EC-G4.4                                                                                                |             | RS6-xxxNBG-E3                                      |
|             | Q.PEAK DUO BLK-G6+/TS                     |                 | Q.PRO L-G2, Q.PEAK (BLK) (G3/G3.1)                                                                           | SEG Solar   | Vitrus2                                            |
|             | Q.PEAK DUO BLK ML-G10+/AC                 |                 | Q.TRON BLK M-G2+                                                                                             |             | RSM60-6, RSM72-6, RSM144-6                         |
|             | Q.PEAK DUO BLK ML-G10.B+                  |                 | Q.TRON BLK M-G2+ AC                                                                                          |             | RSM110-8-xxxBMDG                                   |
|             | Q.PEAK DUO BLK ML-G10.C+                  |                 | Q.TRON BLK M-G2.C+                                                                                           |             | SEG-xxx-BMD-HV, SEG-xxx-BMD-TB                     |
|             | Q.PEAK DUO BLK ML-G10.C1+/AC              |                 | Q.TRON BLK M-G2.F+                                                                                           |             | SEG-XXX-BMB-TB, SEG-xxx-BMA-HV                     |
|             | Q.PEAK DUO BLK ML-G10+ / t                |                 | Q.TRON BLK M-G2.F1+/AC                                                                                       |             | SEG-xxx-BMA-TB, SEG-xxx-BMB-HV                     |
|             | Q.PEAK DUO BLK ML-G10+ / TS               |                 | Q.TRON BLK M-G2.H+                                                                                           |             | SEG-xxx-BMA-BG, SEG-xxx-BMB-BG                     |
|             | Q.PEAK DUO G10+                           |                 | Q.TRON BLK M-G2.H1+/AC                                                                                       |             | SEG-xxx-BTA-BG, SEG-xxx-BTB-BG                     |
|             | Q.PEAK DUO L-(G5/G5.1/G5.2/G5.3)          |                 | Q.TRON BLK M-G2+ SERIES                                                                                      |             | SEG-xxx-BMD-BG, SEG-xxx-BTD-BG                     |
|             | Q.PEAK DUO L-(G6/6.2/6.3)                 |                 | Q.TRON M-G2+ SERIES                                                                                          | S-Energy    | SN72, SN60 Series                                  |
|             | Q.PEAK DUO L-(G7/G7.1/G7.2/G7.3/G7.7)     |                 | Q.TRON XL-G2.3/BFG                                                                                           |             | SL45-60BGI/BHI                                     |
|             | Q.PEAK DUO L-(G8/G8.1/G8.2/G8.3/G8.3 BFG) |                 | Q.TRON XL-G2.3/BFG                                                                                           |             | SL45-60MBI-xxxZ                                    |
|             | Q.PEAK DUO L-G6.3 / BFG                   |                 |                                                                                                              |             | SL40-60MAI/MBI/MCI-xxxV                            |
|             | Q.PEAK DUO ML-G12S.3 / BFG                |                 | Q.PEAK DUO BLK ML-G10.XY+/AC (where "X" = any letter between A to W, where "Y" = any number between 1 to 9.) |             |                                                    |
|             | Q.PEAK DUO ML-G12S.3/BFG                  |                 |                                                                                                              |             |                                                    |
|             | Q.PEAK DUO ML-G12S.7/BFG                  |                 |                                                                                                              |             |                                                    |
|             | Q.TRON BLK M-G2(.H1)(.F1)(.C1)+/AC        |                 |                                                                                                              |             |                                                    |

- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID

**ELECTRICAL BONDING & GROUNDING TEST MODULES:** This racking system may be used to ground and/or mount a PV module complying with UL1703 or UL61730 only when the specific module has been evaluated for grounding and/or mounting in compliance with the included instructions.

| Manufacture    | Module Model / Series                                 | Manufacture                | Module Model / Series        | Manufacture                | Module Model / Series |                   |
|----------------|-------------------------------------------------------|----------------------------|------------------------------|----------------------------|-----------------------|-------------------|
| Seraphim       | SEG-(6PA/6PB/6MA/6MA-HV/6MB/E01/E11)                  | Solaria                    | PowerXTxxxR-PD/BD/AC         | Sunpro Power               | SPDGxxx-120M12        |                   |
|                | SRP-(6QA/6QB)                                         |                            | PowerXTxxxC                  |                            | SPDGxxx-N108M10       |                   |
|                | SRP-320-375-BMB-HV                                    | Solar Space                | PowerXT-xxxR-PM (AC)         | SunTech                    | SPDGxxx-N144M10       |                   |
|                | SRP-390-405-BMD-HV                                    |                            | PowerX-400R                  |                            | STP XXX               |                   |
|                | SRP-390-415-BMA-HV                                    |                            | SS8-54HDB-xxx-N              | Talesun                    | STPXXXS - B60/Wnhb    |                   |
|                | SRP-xxx-BMD-HV                                        |                            | SS8-54HD-xxx-N               |                            | Hipor M               |                   |
|                | SRP-xxx-BTA-BG                                        |                            | SS8-72HD-xxx-M               |                            | Smart                 |                   |
|                | SRP-xxx-BTB-BG                                        |                            | SS8-72HD-xxx-N               |                            | TD6I72M               |                   |
|                | SRP-xxx-BTC-BG                                        |                            | SS8-78HD-xxx-M               |                            | TD7G72M               |                   |
|                | SRP-xxx-BTD-BG                                        |                            | SS9-66HD-xxx-N               |                            | TM3G48M               |                   |
| SRP-xxx-BTE-BG | SSA-48HDB-xxx-N                                       |                            | TM3G54M                      |                            |                       |                   |
|                | SSA-48HD-xxx-N                                        |                            | TM3G66M                      |                            |                       |                   |
|                | SSA-54HDB-xxx-N                                       | TM7G54M                    |                              |                            |                       |                   |
| Sharp          | ND-24CQCJ                                             | SolarTech                  | STU HJT                      |                            | Tesla                 | TM7G60M           |
|                | ND-25CQCS                                             |                            | STU PERC                     | TM7G72M                    |                       |                   |
|                | ND-F4Q300                                             | SolarWorld                 | Sunmodule Protect/Plus       | TP572, TP596, TP654, TP660 |                       |                   |
|                | ND-Q235F4                                             |                            | Sonali                       | SS-M-360 to 390 Series     |                       | TP672             |
|                | NU-SA                                                 |                            |                              | SS-M-390 to 400 Series     |                       | TP6F72M           |
| NU-SC          | SS-M-440 to 460 Series                                | TP6F72M(H)                 |                              |                            |                       |                   |
| Silfab         | SILxxx(BG/BK/BL/HC/HC+/HL/HM/HN/ML/NL/NT/NX/NU/QD/QM) | Sun Edison/<br>Flextronics | F-Series / FLEX FXS          | Thornova                   |                       | TP7G54M(H)        |
|                | SIL-xxx XL                                            | Suniva                     | R-Series / FLEX FXS          |                            |                       | Tesla Solar Panel |
|                | SIL-xxx XM                                            | Sunmac Solar               | MV Series                    | TSP-415/TSP-420            |                       |                   |
|                | SIL-xxx XM+                                           |                            | Optimus Series               | TxxxH                      |                       |                   |
|                | SLA-M/P                                               | SunPower                   | M754SH-BB Series             | TxxxS                      |                       |                   |
| SLG-M/P        | X-Series 72 & E-Series 72                             |                            | TS-BBT54(xxx)                |                            |                       |                   |
| Sirius         | ELNSM54M-HC-BF Series                                 | SunPower                   | X-Series 96 & E-Series 96    | TS-BG54                    |                       |                   |
|                | ELNSM54M-HC Series                                    |                            | P-Series, Sig Black          | TS-BG72                    |                       |                   |
| Sirius PV      | ELNSM54M-HC-N                                         |                            | SPR E20 435 COM (G4 Frame)   | TS-BGT72(xxx)              |                       |                   |
| Solar4America  | S4Axxx-108MH10BB, S4Axxx-72MH5BB                      |                            | Axxx-BLK-G-AC, SPR-Mxxx-H-AC |                            |                       |                   |
|                | S4Axxx-144MH10xxx, S4Axxx-144TH10xxx                  |                            | SPR-Mxxx-BLK-H-AC            |                            |                       |                   |
|                | S4Axxx-144TH16xxx, S4Axxx-108MH10xxx                  |                            |                              |                            |                       |                   |
|                | S4Axxx-108TH10xxx                                     |                            |                              |                            |                       |                   |
| SolarEver USA  | SE-166*83-xxxM-120N                                   |                            |                              |                            |                       |                   |
|                | SE-182*91-xxxM-108N                                   |                            |                              |                            |                       |                   |
|                | SE-182*105-xxxM-96-BD                                 |                            |                              |                            |                       |                   |

- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID

**ELECTRICAL BONDING & GROUNDING TEST MODULES:** This racking system may be used to ground and/or mount a PV module complying with UL1703 or UL61730 only when the specific module has been evaluated for grounding and/or mounting in compliance with the included instructions.

| Manufacture     | Module Model / Series                          |
|-----------------|------------------------------------------------|
| Trina Solar     | DE06, DE09.05, DE09C.07                        |
|                 | DE18M(II), DEG18MC.20(II)                      |
|                 | DE19, DEG19C.20                                |
|                 | DEG15HC.20(II), DEG15MC.20(II), DEG15VC.20(II) |
|                 | PA05, PD05, DD05, DD06                         |
|                 | PD14, PE14, DD14, DE14, DE15, DE15V(II)        |
|                 | TSM-DE06X.05(II)                               |
|                 | TSM-DE09.05                                    |
|                 | TSM-DE09.08                                    |
|                 | TSM-DE09C.07                                   |
|                 | TSM-DEG21C.20                                  |
|                 | TSM-NE09RC.05                                  |
|                 | TSM-NE09RH.05                                  |
|                 | TSM-NE19RC                                     |
|                 | TSM-NEG19RC.20                                 |
|                 | TSM-NEG21C.20                                  |
|                 | TSM-DE15H(II)                                  |
| Universal Solar | UNI4xx-144BMH-DG                               |
|                 | UNI5xx-144BMH-DG                               |
|                 | UNIxxx-108M-BB                                 |
|                 | UNIxxx-120M-BB                                 |
|                 | UNIxxx-120MH                                   |
| Upsolar         | UP-Mxxx                                        |
| URE             | D7K_H8A                                        |
|                 | D7M_(H7A/H8A)                                  |
|                 | FAKxxx(C8G/E8G)                                |
|                 | FAMxxxE7G-BB                                   |
|                 | FAMxxxE8G(-BB)                                 |
| URECO           | FBKxxxM8G                                      |
|                 | F6MxxxE7G-BB                                   |
|                 | FBMxxxM7G-BB                                   |
| URECO           | FBMxxxMFG-BB                                   |

| Manufacture  | Module Model / Series        |
|--------------|------------------------------|
| Vikram Solar | Eldorado, Solivo & Somera    |
|              | PREXOS VSMDHT.60.AAA.05      |
|              | PREXOS VSMDHT.72.AAA.05      |
|              | Paradea VSMDH.72.AAA.05      |
|              | Paradea VSMDH.66.AAA.05      |
| VSUN         | VSUN400-415-144BMH           |
|              | VSUN4xx-144BMH-DG            |
|              | VSUN5xx-144BMH-DG            |
|              | VSUNxxx-108BMH               |
|              | VSUNxxx-108M-BB              |
|              | VSUNxxx-108MH                |
|              | VSUNxxx-120BMH               |
|              | VSUNxxx-120M-BB              |
|              | VSUNxxx-132BMH               |
|              | VSUNxxx-144BMH               |
|              | VSUNxxx-144M-BB              |
|              | VSUNxxx-144M-BW              |
|              | VSUNxxx-144MH                |
|              | VSUNxxx-60M-BB               |
|              | VSUNxxx-72MH                 |
|              | VSUNxxxN-108BMH-BB           |
|              | VSUNxxxN-108BMH-BB (SoftPaw) |
|              | VSUNxxxN-120BMH-BB (SoftPaw) |
|              | VSUNxxxN-144BMH              |
|              | VSUNxxxN-144MH               |
| Waaree       | Arka Series WSMDi            |
|              | Bi-55-xxx                    |
|              | BiN-08-xxx                   |
|              | WST & WSP Series             |
| Yingli       | YGE 60 Cell                  |
|              | YGE 60 Cell Series 2         |
|              | YLM 60                       |
|              | YLM 72                       |
|              | YLM-VG                       |

| Manufacture   | Module Model / Series |
|---------------|-----------------------|
| Yotta Energy  | YSM-B450-1            |
| ZNShine Solar | ZXM6-72 Series        |
|               | ZXM6-NH120 Series     |
|               | ZXM6-NH144            |
|               | ZXM6-NHLDD144-XXX/M   |
|               | ZXM7-SH108 Series     |
|               | ZXM7-SHDB144          |
|               | ZXM7-SHLDD144         |
|               | ZXM7-UHLDD108         |
|               | ZXM7-UHLDD144         |
|               | ZXM8-GPLDD132 Series  |
|               | ZXM8-TPLDD132         |

- Unless otherwise noted, all modules listed above include all wattages and specific models within that series. Variable wattages are represented as "xxx"
- Items in parenthesis are those that may or may not be present in a compatible module's model ID
- Slashes "/" between one or more items indicates that either of those items may be the one that is present in a module's model ID