
NXT UMOUNT®
FOR NEW HOME CONSTRUCTION

UNIRAC
BETTER SOLAR STARTS HERE

BUILD IN PHASES. INSTALL WITH CONFIDENCE.

Align the solar installation with the construction timeline. Unirac components can be purchased and installed as each phase of construction is completed, reducing onsite storage and avoiding early staging. Each assembly includes the parts needed for that step: attachments, L-Feet, flashing, hardware, and fasteners. Less handling means less risk of loss or damage.

UNIRAC 25 YEAR FULL-SYSTEM WARRANTY

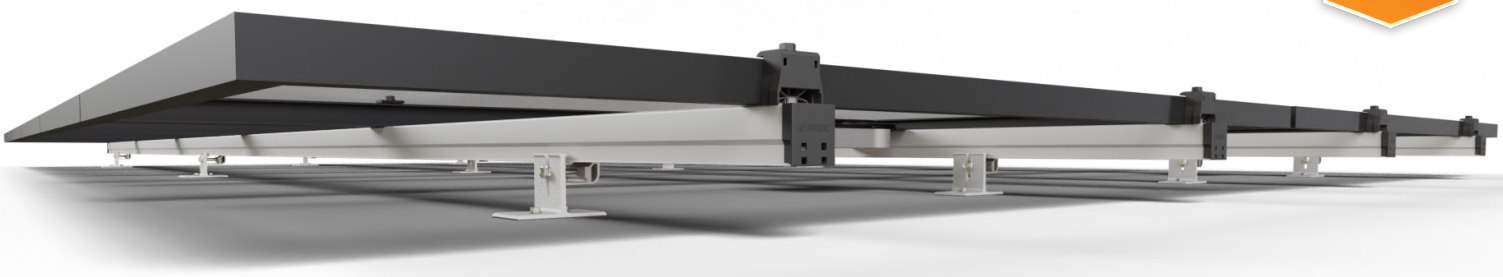



NXT UMOUNT® OPEN-CHANNEL RACKING SYSTEM FOR NEW HOME CONSTRUCTION

- Easy-to-engage rails and clamps reduce install time and labor on the roof.
- Seamless wire management built directly into the open-channel rail.
- Fewer SKUs with multifunctional components = simplified inventory and logistics.
- Four recommended attachments allow for flexibility with solar installations on new home construction.

FOR QUESTIONS OR CUSTOMER SERVICE CONTACT:
505-242-6411 | SALES@UNIRAC.COM | WWW.UNIRAC.COM
PUB2026OCT09-V3

CONFORMS TO UL 3741
CONFORMS TO UL 2703
ISO 9001:2015 14001:2015 CERTIFIED

NXT UMOUNT®
FOR NEW HOME CONSTRUCTION

UNIRAC®
BETTER SOLAR STARTS HERE

RECOMMENDED ATTACHMENTS BUILT FOR NEW CONSTRUCTION







FLASHKIT PRO®

- Preferred attachment solution on composition shingle roofs
- Fast, code-compliant, and weather-resistant mechanical flashing
- Features SHED & SEAL™ Technology that diverts water and snow from attachment point
- Utilizes a traditional L-FOOT attachment assembly to the open-channel rail

STANDOFFS + THREE-COURSE FLASHING

- Standoffs deliver strength, versatility, and long-term reliability for solar installations across tile, composition shingle, and flat roofs.
- Three-course Flashing solution provides reliable waterproofing through a three-layer protection system, making it ideal for new home construction on tile roofs.
- Deck-level Flashing provides the primary mechanical water barrier and is engineered for structural integrity and long-term durability.
- Tile-level Flashing is made from a pliable material that forms to the tile roof and designed for long-term performance in new construction environments.

SOLARHOOKS™

- Available in universal designs and shapes tailored for Flat, S, and W tiles; no tile modification required.
- Exclusive POWERARCH™ Technology increases strength by 60% and improves durability for longer spans
- Slotted connections, adjustable hook positions, and multiple hole patterns speed up the install and accommodate a range of conditions

STRONGHOLD® BUTYL & SOLARMOUNT® BUTYL



- Feature an integrated flashing that utilizes a flexible pre-applied butyl sealant to flash the roof.
- It's a non-metal flashing solution that eliminates the need to pry up shingle courses.
- Compatible with multiple pitched and low slope roof types including composition shingle, metal, membrane systems and flat rolled comp roofs.

FOR QUESTIONS OR CUSTOMER SERVICE CONTACT:
505-242-6411 | SALES@UNIRAC.COM | WWW.UNIRAC.COM
PUB2026OCT09-V3

CONFORMS TO UL 3741
CONFORMS TO UL 2703
ISO 9001:2015 14001:2015 CERTIFIED