

STRONGHOLD® | BUTYL

THE TRUSTED CHOICE FOR NXT UMOUNT®

UNIRAC
BETTER SOLAR STARTS HERE

Optimized for Unirac's NXT UMOUNT® racking system, this solution uses a pre-applied butyl pad to eliminate traditional flashing, reduce labor, and ensure a clean, damage-free installation on composition shingle roofs. This self-sealing roof attachment can be installed direct-to-rafter or direct-to-deck providing a reliable watertight solution backed by industry proven materials.



SIMPLIFIED 1-2-3 INSTALLATION


- Peel, place, and secure directly onto shingles, eliminating separate flashings, pry bars, extra sealants, or disruption to the roof.
- Flexible butyl conforms to rough shingle surfaces, gaps, and screws to provide cushioning and a long-term seal.

DUAL MOUNTING OPTIONS

- Compatible with both rafter and direct-to-deck installations for added design versatility.
- Built-in flexibility for rafter misses by simply leaving the first screw and securing a second screw on the same side, aiming for the rafter.

DESIGNED FOR HIGH-PERFORMANCE

- Open slot design and included NXT rail clamp make rail connectivity and wire management seamless.
- The simplified labor-saving design optimized and certified for Unirac NXT UMOUNT® system.
- Installs effortlessly over shingle steps up to 1/8".
- Conquers uneven shingles with additional butyl shims when installing over shingle steps greater than 1/8", eliminating the need to cut or modify a shingle.

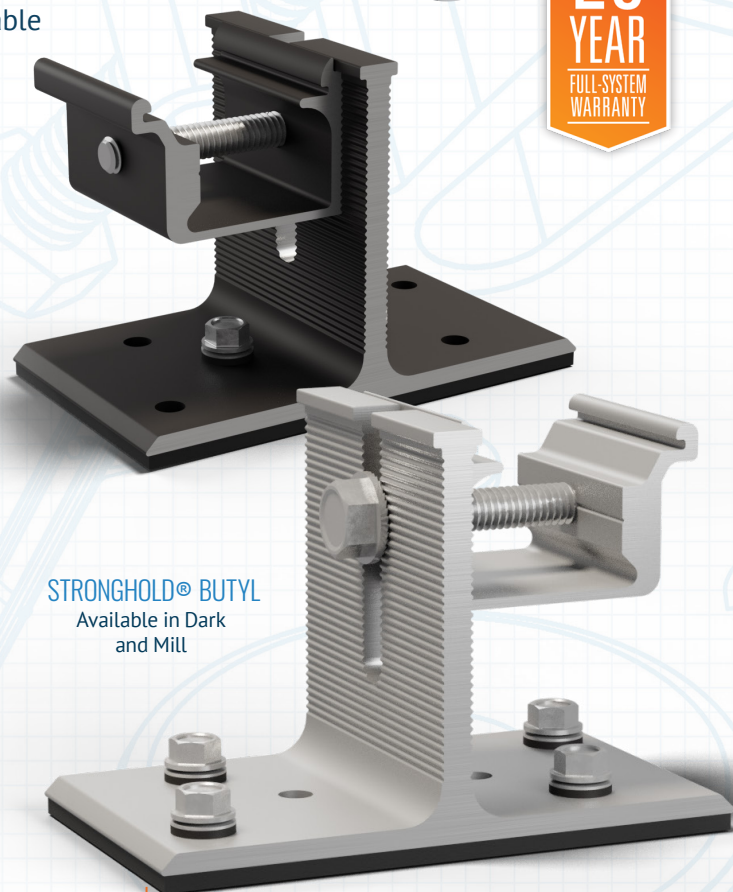

STRONGHOLD® BUTYL
Available in Dark
and Mill

INSTALLS ON:



COMPOSITION
SHINGLE



LOW SLOPE



METAL



MEMBRANE
SYSTEMS

EACH KIT INCLUDES:

- ONE (1) Butyl Attachment
- TWO (2) #14 Screws with Sealing Washer for Rafter Mounting
- ONE (1) NXT Rail Clamp

Additional #14 Screws and Butyl Pads are sold separately.

FOR QUESTIONS OR CUSTOMER SERVICE CONTACT:
505-242-6411 | SALES@UNIRAC.COM | WWW.UNIRAC.COM
PUB2025JUL07-V1

MIAMI-DADE COUNTY
APPROVED
UL2703

CONFORMS TO
UL2703A



9001:2015
14001:2015
CERTIFIED