Engineering Alliance, Inc

https://www.eng-alliance.com

09-January-2025

Unirac
1411 Broadway Blvd. NE
Albuquerque, NM 87101
Tel: 505 242 6411

Attn.: Engineering Department

Subject: Engineering Certification for the EcoFoot2+ Roof Mounted Ballasted System to Support Photovoltaic Panels.

The EcoFoot2+ is a ballasted photovoltaic panel support system consisting of three core components - EcoFoot2+ base, wind deflector, and preassembled universal clamp holding the bay and PV modules together. The ballasted EcoFoot2+ base is the main dead weight to resist any uplift due to wind loads. Lateral forces, both wind and seismic, are resisted by friction between the EcoFoot2+ base/Ecofoot surface and the roof surface.

Unirac online design assistant tool U-Builder 2.0 is used to determine the required ballast quantity. The U-Builder 2.0 covers a wide range of system configurations and loading and allows the user to customize the input to match the specific project conditions.

The EcoFoot2+ PV racking system satisfies the RWDI wind tunnel test results and the ballasted system design methodology, which makes the U-Builder 2.0 a rational and easy method of designing the EcoFoot2+ ballasted PV module design tool in compliance with the structural requirements of the following reference documents:

Codes:
1. 2015 & 2018 Pennsylvania Building Code.
2. ASCE/SEI 7-10 & 7-16 Minimum Design Loads for Buildings and Other Structures.
3. International Building Code, 2015 & 2018 Edition w/ Provisions from SEAOC PV-2 2017.

Other:
1. RWDI Wind Pressure Study Report # 2002293
2. SEAOC PV1-2012 Report - Structural Seismic Requirements and Commentary for Rooftop Solar PV Arrays
3. SEAOC PV2-2017 Report - Wind Design for Low-Profile Solar Photovoltaic Arrays on Flat Roofs

This letter certifies that the EcoFoot2+ Roof Mounted Ballasted Photovoltaic Panel Support System and online design tool U-Builder 2.0 are in compliance with the reference documents mentioned above.

Please feel free to call or email for any questions or clarifications.

Prepared By:
Engineering Alliance, Inc
Sugar Land, TX

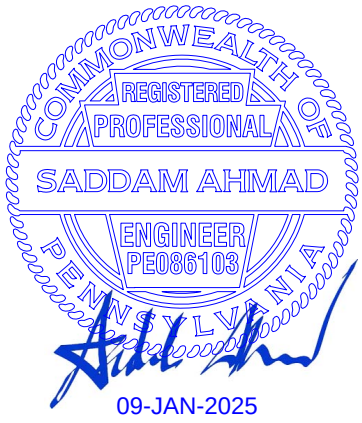

09-JAN-2025

4603 April Meadow Way, Sugar Land, TX 77479. Ph: 832 865 4757, Email: sahmad@eng-alliance.com